


# CABLE DEREELER RAMA FLEX

## AUTOMATIC FEEDING OF CABLES

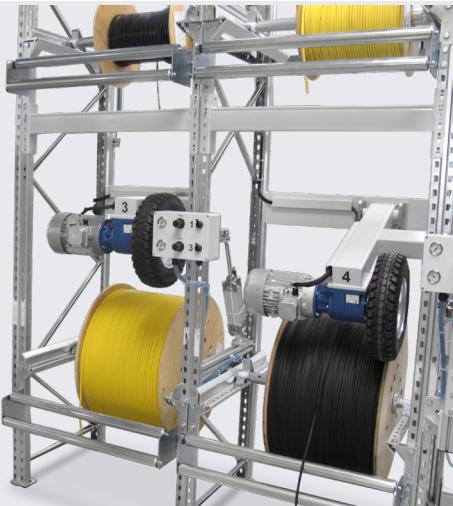

### FEATURES

- For cable reel diameters 400 - 1200 mm, width approx. 1000 mm, weight max. 1000 kg. The rama FLEX is a perfect solution for a production with 4-8 cable reels in use
- The cable dereelers rama TWIN and rama FLEX are designed to enable very fast changeovers. Switching from one cable type to another is mostly a matter 30 - 60 sec. Both machines drive a cable reel with a rubber wheel and balance the cable tension via a cable reservoir / accumulator

### TECHNICAL DATA

Performance	rama FLEX
Cable spool diameter	up to 1200 mm
Cable spool width	up to 850 mm
Cable spool weight	up to 1000 kg
Max. cable outside diameter	
Version 18	18 mm
Version 35	35 mm
Max. Cable spool speed	190 min <sup>-1</sup>
Cable reservoir volume	Swinging arm reservoir or linear reservoir
Spool clamping system	With spool shaft / axle
Operation	Control panel
Interfaces	Communication interface to cable processing machines
Drive	Variable-frequency 3-phase AC motor with electro-mechanical brake
Electrical connection	3 x 400 VAC, N 32 A
Compressed air supply	6 bar
Weight	Depends on length
Dimension (L x W x H)	Depends on length

#### LOCATION SWITZERLAND

**Ramatech Systems AG** . Hohenrainstrasse 36 . CH - 6280 Hochdorf  
 Phone: +41 41 914 26 26 . E-Mail: [info@ramatech.ch](mailto:info@ramatech.ch)

© Ramatech systems 2021

#### LOCATION GERMANY

**Ramatech Systems GmbH** . Messerschmittstraße 30 . D - 89231 Neu-Ulm  
 Phone: +49 731 40 199 200 . E-Mail: [info@ramatech.de](mailto:info@ramatech.de)