




PASSIVE REEL RACK SYSTEM RAMA LA 01

Passive storage of cable reels

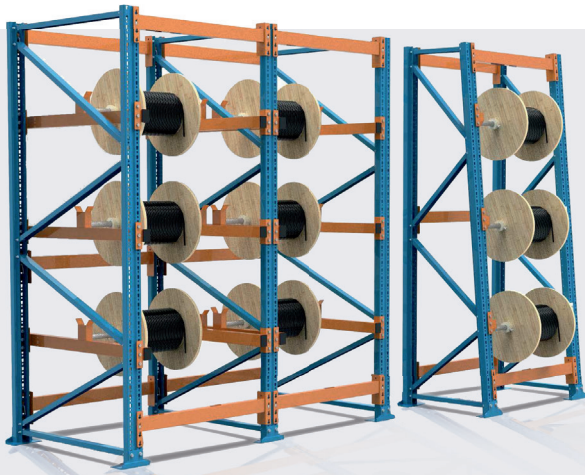

FEATURES

- Manual reel frame in straight or angled design
- Without drive unit for unwinding the cable reel
- Various hall dimensions can be covered thanks to different grid widths and frame heights
- For any number of cable reels
- Extensive range of accessories such as drum axles, flanges and back-stops available
- Customizable thanks to modular system

TECHNICAL DATA

Performance	Straight design	Angled design
Number of cable reels	arbitrary	arbitrary
Max. Outer reel diameter	1200 mm	1200 mm
Max. Load capacity per cable reel	1000 kg	500 kg
Inclination angle	-	5 °
Standard heights	2000 mm 2500 mm 3000 mm 3500 mm 4000 mm 4500 mm 5000 mm	2000 mm 2500 mm 3000 mm 3500 mm 4000 mm 4500 mm 5000 mm
Standard widths	750 mm 950 mm 1150 mm 1350 mm	750 mm 950 mm 1150 mm 1350 mm
Reel shafts with diameter	34 mm 49 mm 60 mm	34 mm 49 mm 60 mm
Drum shaft suspension	Central in the center of the stand	Frontal
Maximum load		3000 kg for 6 cable reels on top of each other per rack bay

LOCATION SWITZERLAND

Ramatech Systems AG . Hohenrainstrasse 36 . CH - 6280 Hochdorf
Phone: +41 (0)41 914 26 26 . E-Mail: info@ramatech.ch

© Ramatech systems 2024

LOCATION GERMANY

Ramatech Systems GmbH. Messerschmittstraße 30 . D - 89231 Neu-Ulm
Phone: +49 731 40 199 200 . E-Mail: info@ramatech.de