


## Guided drives DFM/DFM-B

**FESTO**





Key features

| At a glance                                                                                                                                                                   |                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Drive and guide in a single housing                                                                                                                                           | Sturdy and precise                                                                                                                                                                                                                           | High resistance to torques and lateral forces                                                                                                                                                                                                 |
| <ul style="list-style-type: none"><li>Minimal space requirement</li><li>Minimal mounting time</li><li>Choice of supply ports</li><li>Wide range of mounting options</li></ul> | <ul style="list-style-type: none"><li>High resistance to torsion</li><li>High rigidity</li><li>Maintenance-free</li></ul>                                                                                                                    | <ul style="list-style-type: none"><li>With plain-bearing guide: high rigidity thanks to large-diameter guide rods and four plain-bearing bushes</li><li>With recirculating ball bearing guide: for movements involving torque loads</li></ul> |
| Wide choice of variants                                                                                                                                                       |                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                               |
| Guided drive DFM                                                                                                                                                              | Guided drive DFM-B                                                                                                                                                                                                                           |                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"><li>Basic drive with strokes of up to 200 mm</li></ul>                                                                                      | <ul style="list-style-type: none"><li>Drive with strokes of up to 400 mm</li><li>With precision end-position adjustment</li><li>With pneumatic cushioning, adjustable PPV</li><li>With shock absorber, self-adjusting, progressive</li></ul> |                                                                                                                                                                                                                                               |

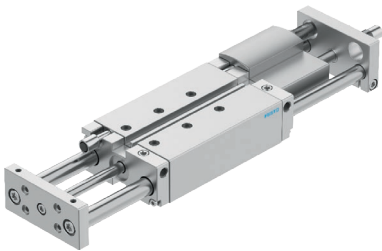


| Application examples                                                                         |                                                                                                 |                                                                                                                         |
|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Terminals                                                                                    | Lifting                                                                                         | Stopping                                                                                                                |
| The guided drive is perfectly suited to clamping components for reliable further processing. | The powerful and dynamic guided drive transports and lifts loads of more than 200 kg with ease. | Loads of up to 150 kg are stopped reliably and safely, making the guided drive a resilient and sturdy stopper cylinder. |

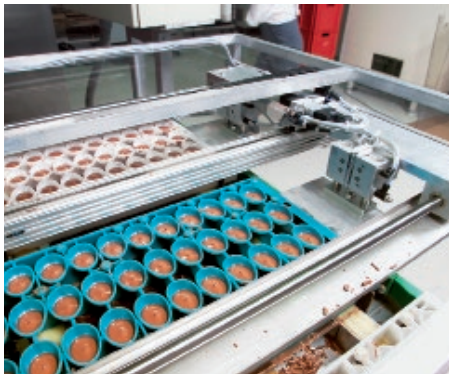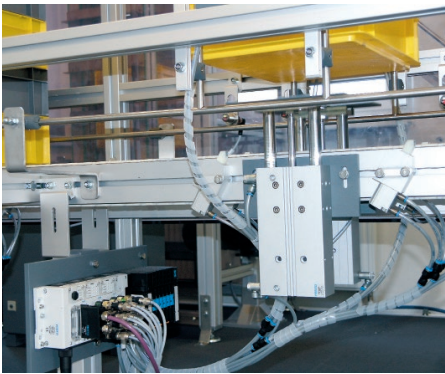


## Key features

### Use in conveyor technology


#### Lifting




#### Pushing

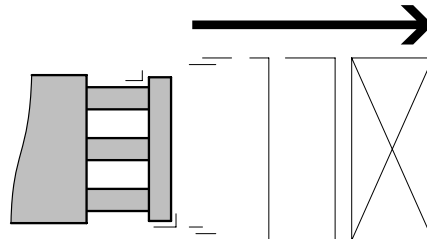

#### Stopping

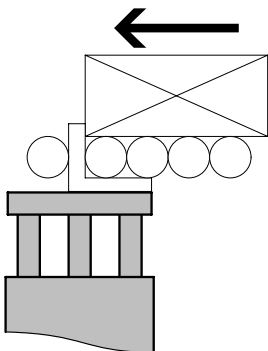


#### Stopping with stop bracket




A buffer on the workpiece carrier is recommended!

### Mounting options


#### Flat from the top




#### Flat from underneath







#### Sideways and underneath



#### At the front



# Product range overview

| Function      | Version                                                                             | Type                           | Piston $\varnothing$ | Stroke                                                    | Variable stroke |
|---------------|-------------------------------------------------------------------------------------|--------------------------------|----------------------|-----------------------------------------------------------|-----------------|
|               |                                                                                     |                                | [mm]                 | [mm]                                                      | [mm]            |
| Double-acting | DFM basic version with recirculating ball bearing guide                             |                                |                      |                                                           |                 |
|               |    | DFM<br>Piston rod at one end   | 12, 16               | 10, 20, 25, 30, 40, 50, 80, 100                           | –               |
|               |                                                                                     |                                | 20, 25               | 20, 25, 30, 40, 50, 80, 100                               | –               |
|               |                                                                                     |                                | 32                   | 20, 25, 30, 40, 50, 80, 100, 125, 160, 200                | –               |
|               |                                                                                     |                                | 40, 50, 63, 80, 100  | 25, 50, 80, 100, 125, 160, 200                            | –               |
|               | DFM basic version with plain-bearing guide                                          |                                |                      |                                                           |                 |
|               |    | DFM<br>Piston rod at one end   | 6, 10                | 5, 10, 15, 20                                             | –               |
|               |                                                                                     |                                | 12, 16               | 10, 20, 25, 30, 40, 50, 80, 100                           | –               |
|               |                                                                                     |                                | 20, 25               | 20, 25, 30, 40, 50, 80, 100                               | –               |
|               |                                                                                     |                                | 32                   | 20, 25, 30, 40, 50, 80, 100, 125, 160, 200                | –               |
|               |                                                                                     |                                | 40, 50, 63, 80, 100  | 25, 50, 80, 100, 125, 160, 200                            | –               |
|               | DFM-B with recirculating ball bearing guide                                         |                                |                      |                                                           |                 |
|               |   | DFM-B<br>Piston rod at one end | 12, 16               | 10, 20, 25, 30, 40, 50, 80, 100, 125, 160, 200            | 10 ... 200      |
|               |                                                                                     |                                | 20, 25, 32           | 20, 25, 30, 40, 50, 80, 100, 125, 160, 200, 250, 320, 400 | 20 ... 400      |
|               |                                                                                     |                                | 40, 50, 63           | 25, 50, 80, 100, 125, 160, 200, 250, 320, 400             | 25 ... 400      |
|               | DFM-B with plain-bearing guide                                                      |                                |                      |                                                           |                 |
|               |  | DFM-B<br>Piston rod at one end | 12, 16               | 10, 20, 25, 30, 40, 50, 80, 100, 125, 160, 200            | 10 ... 200      |
|               |                                                                                     |                                | 20, 25, 32           | 20, 25, 30, 40, 50, 80, 100, 125, 160, 200, 250, 320, 400 | 20 ... 400      |
|               |                                                                                     |                                | 40, 50, 63           | 25, 50, 80, 100, 125, 160, 200, 250, 320, 400             | 25 ... 400      |



## Note

Engineering tool

→ [www.festo.com/engineeringtools](http://www.festo.com/engineeringtools)

## Product range overview

| Type                                                           | Position sensing | Recommended for production systems for manufacturing lithium-ion batteries | Cushioning     |                            |                                                         | Heat-resistant seals | End-position adjustment                   |                                            | → Page/Internet |
|----------------------------------------------------------------|------------------|----------------------------------------------------------------------------|----------------|----------------------------|---------------------------------------------------------|----------------------|-------------------------------------------|--------------------------------------------|-----------------|
|                                                                |                  |                                                                            | Not adjustable | Adjustable for heavy loads | Self-adjusting end position adjustable for large masses |                      | Advanced end position, elastic cushioning | Retracted end position, elastic cushioning |                 |
|                                                                | A                | F1A                                                                        | P              | PPV                        | YSRW                                                    | S6                   | AJ                                        | EJ                                         |                 |
| <b>DFM basic version with recirculating ball bearing guide</b> |                  |                                                                            |                |                            |                                                         |                      |                                           |                                            |                 |
| <b>DFM</b><br>Piston rod at one end                            | ■                | ■<br>Ø 12 ... 63                                                           | ■              | –                          | –                                                       | –                    | –                                         | –                                          | 9               |
| <b>DFM basic version with plain-bearing guide</b>              |                  |                                                                            |                |                            |                                                         |                      |                                           |                                            |                 |
| <b>DFM</b><br>Piston rod at one end                            | ■                | ■<br>Ø 12 ... 63                                                           | ■              | –                          | –                                                       | –                    | –                                         | –                                          | 9               |
| <b>DFM-B with recirculating ball bearing guide</b>             |                  |                                                                            |                |                            |                                                         |                      |                                           |                                            |                 |
| <b>DFM-B</b><br>Piston rod at one end                          | ■                | –                                                                          | ■              | ■<br>From Ø 16             | ■<br>From Ø 20                                          | –                    | ■                                         | ■<br>From Ø 20                             | 42              |
| <b>DFM-B with plain-bearing guide</b>                          |                  |                                                                            |                |                            |                                                         |                      |                                           |                                            |                 |
| <b>DFM-B</b><br>Piston rod at one end                          | ■                | –                                                                          | ■              | ■<br>From Ø 16             | –                                                       | ■                    | ■                                         | ■<br>From Ø 20                             | 42              |

## Type codes

|     |                             |  |
|-----|-----------------------------|--|
| 001 | Series                      |  |
| DFM | Guided drive, double-acting |  |

|     |                      |  |
|-----|----------------------|--|
| 002 | Piston diameter [mm] |  |
| 6   | 6                    |  |
| 10  | 10                   |  |
| 12  | 12                   |  |
| 16  | 16                   |  |
| 20  | 20                   |  |
| 25  | 25                   |  |
| 32  | 32                   |  |
| 40  | 40                   |  |
| 50  | 50                   |  |
| 63  | 63                   |  |
| 80  | 80                   |  |
| 100 | 100                  |  |

|     |                   |  |
|-----|-------------------|--|
| 003 | Stroke range [mm] |  |
| ... | 10 ... 400        |  |

|     |                    |  |
|-----|--------------------|--|
| 004 | Generation         |  |
|     | Standard           |  |
| B   | Function-optimised |  |

|      |                                               |  |
|------|-----------------------------------------------|--|
| 005  | Cushioning                                    |  |
| P    | Elastic cushioning rings/plates on both sides |  |
| PPV  | Pneumatic cushioning, adjustable at both ends |  |
| YSRW | Shock absorber, self-adjusting, progressive   |  |

|     |                      |  |
|-----|----------------------|--|
| 006 | Position sensing     |  |
| A   | For proximity sensor |  |

|     |                                  |  |
|-----|----------------------------------|--|
| 007 | Guide                            |  |
| GF  | Plain bearing                    |  |
| KF  | Recirculating ball bearing guide |  |

|     |                                                                                    |  |
|-----|------------------------------------------------------------------------------------|--|
| 008 | Special material properties                                                        |  |
|     | None                                                                               |  |
| F1A | Recommended for production facilities for the manufacture of lithium-ion batteries |  |

|     |                                  |  |
|-----|----------------------------------|--|
| 009 | Temperature range                |  |
|     | Standard                         |  |
| S6  | Heat-resistant seals max. 120 °C |  |

|     |                                                      |  |
|-----|------------------------------------------------------|--|
| 010 | Precision adjustment extended                        |  |
|     | None                                                 |  |
| AJ  | Precision adjustment in the end positions, advancing |  |

|     |                                                       |  |
|-----|-------------------------------------------------------|--|
| 011 | Precision adjustment retracting                       |  |
|     | None                                                  |  |
| EJ  | Precision adjustment in the end positions, retracting |  |


|      |                         |  |
|------|-------------------------|--|
| 012  | Slot cover, sensor slot |  |
|      | None                    |  |
| ...S | 1 ... 10 pieces         |  |

|      |                                     |  |
|------|-------------------------------------|--|
| 013  | Proximity switch, with cable, 2.5 m |  |
|      | None                                |  |
| ...G | 1 ... 10 pieces                     |  |

|      |                                                  |  |
|------|--------------------------------------------------|--|
| 014  | Proximity switch, contactless, with cable, 2.5 m |  |
|      | None                                             |  |
| ...I | 1 ... 10 pieces                                  |  |

## Peripherals overview

Piston Ø 6 ... 10

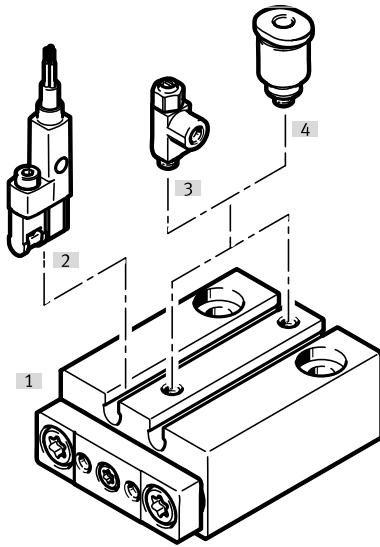

| Accessories |                                 | Description                              | → Page/Internet |
|-------------|---------------------------------|------------------------------------------|-----------------|
| [1]         | Guided drive DFM                | Guided drive, basic version              | 9               |
| [2]         | Proximity switch SMT-10G        | Inserted into the slot lengthwise        | 75              |
| [3]         | One-way flow control valve GRLA | For regulating speed                     | 78              |
| [4]         | Push-in fitting QSM/QS          | For connecting tubing with standard O.D. | qs              |

### Note

Only the following push-in fitting/one-way flow control valve may be used in combination with proximity switch SMT-10G:

- QSM-M3-2-I
- GRLA-M3



### Note

Note the installation position of the proximity switches SMT-10G  
→ User documentation

### Extremely functional


Direction of movement

High resistance to torsion, torque and transverse force absorption

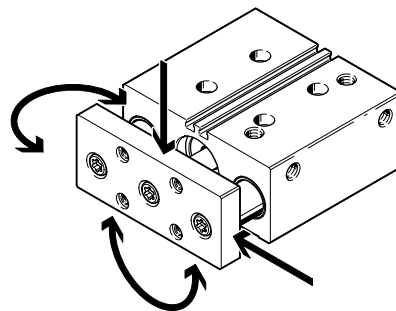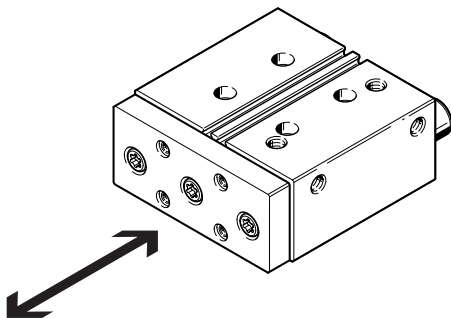

Peripherals overview

Piston Ø 12 ... 100

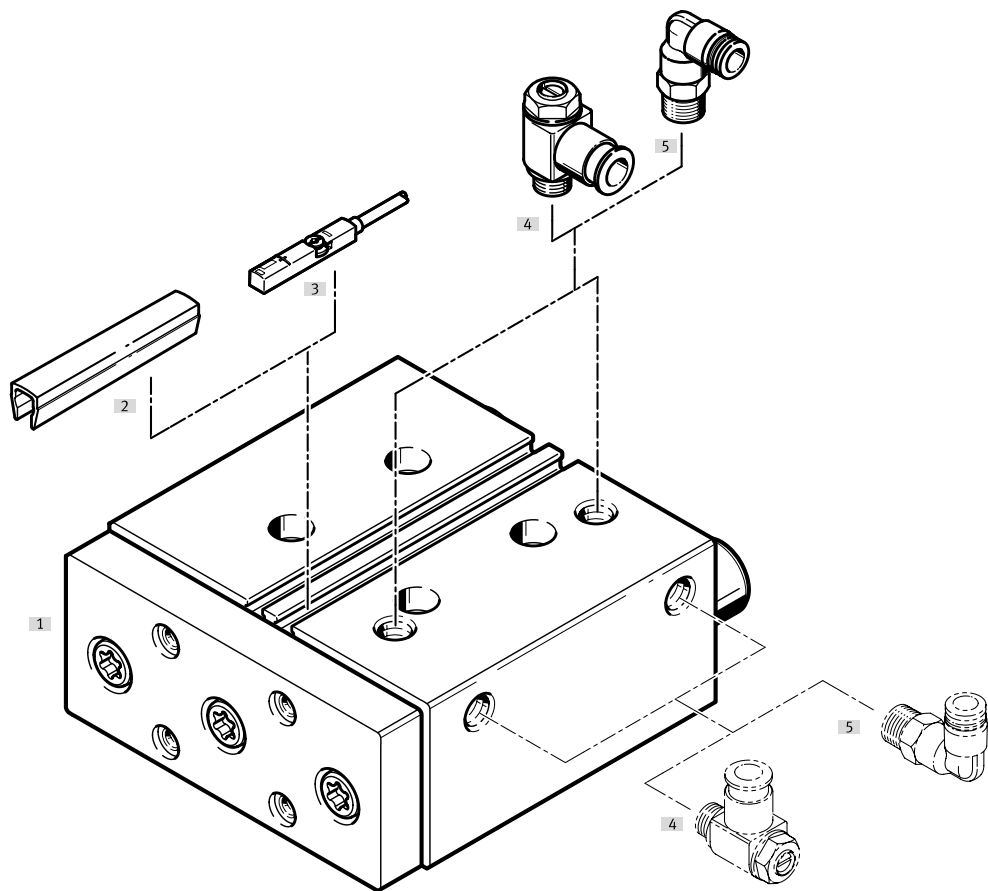


| Accessories |                                 | Description                                                              | → Page/Internet |
|-------------|---------------------------------|--------------------------------------------------------------------------|-----------------|
| [1]         | Guided drive DFM                | Guided drive, basic version                                              | 9               |
| [2]         | Slot cover ABP-5-S              | For protecting the sensor cables and the sensor slots from contamination | 78              |
| [3]         | Proximity switch SME-/SMT-8     | Can be integrated in the profile barrel                                  | 76              |
| [4]         | One-way flow control valve GRLA | For regulating speed                                                     | 78              |
| [5]         | Push-in fitting QSM/QS          | For connecting tubing with standard O.D.                                 | qs              |
| –           | Centring sleeves ZBH            | 4 or 6 included in the scope of delivery                                 | 75              |
| –           | Adapter                         | For drive/drive connections                                              | <?>             |
|             |                                 | For drive/gripper connections                                            | gripper         |


Extremely functional

Direction of movement

High resistance to torsion, torque and transverse force absorption

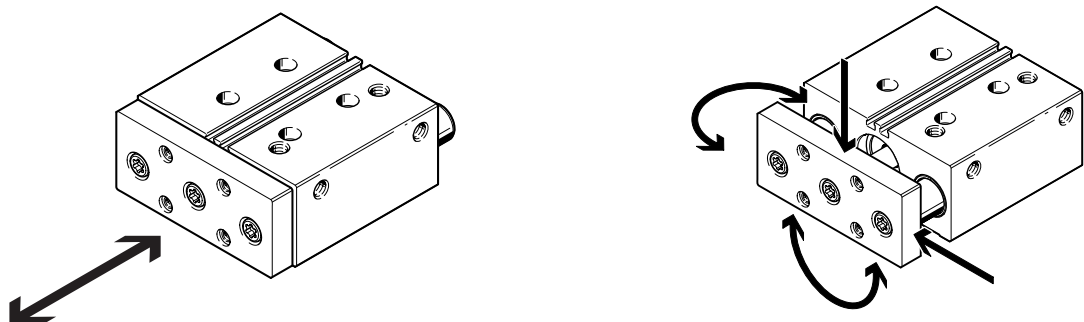

## Datasheet




[www.festo.com](http://www.festo.com)  
Piston Ø 12 ... 100 mm



Repair service  
Piston Ø 12 ... 100 mm

- Ø - Diameter  
6 ... 100 mm

- I - Stroke length  
5 ... 200 mm

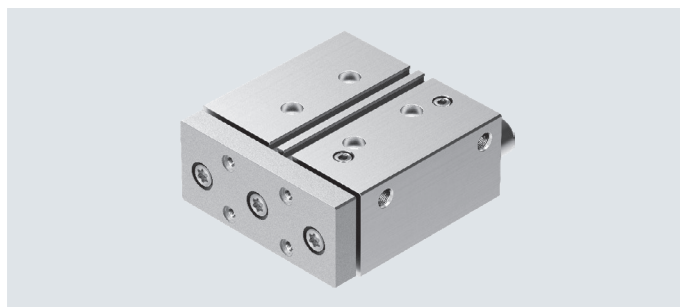**General technical data**

| Piston Ø                          | 6                                                        | 10 | 12 | 16 | 20 | 25   | 32   | 40   | 50   | 63   | 80   | 100  |
|-----------------------------------|----------------------------------------------------------|----|----|----|----|------|------|------|------|------|------|------|
| Pneumatic connection              | M3                                                       | M3 | M5 | M5 | M5 | G1/8 | G1/8 | G1/8 | G1/4 | G1/4 | G3/8 | G3/8 |
| Design                            | Piston                                                   |    |    |    |    |      |      |      |      |      |      |      |
|                                   | Piston rod                                               |    |    |    |    |      |      |      |      |      |      |      |
|                                   | Guide rods with yoke                                     |    |    |    |    |      |      |      |      |      |      |      |
| Cushioning                        | Elastic cushioning rings/plates at both ends             |    |    |    |    |      |      |      |      |      |      |      |
| Position sensing                  | Via proximity switch                                     |    |    |    |    |      |      |      |      |      |      |      |
| Type of mounting                  | With through-hole                                        |    |    |    |    |      |      |      |      |      |      |      |
|                                   | With female thread                                       |    |    |    |    |      |      |      |      |      |      |      |
| Mounting position                 | Any                                                      |    |    |    |    |      |      |      |      |      |      |      |
| Protection against rotation/guide | Guide rods with yoke/plain-bearing or ball bearing guide |    |    |    |    |      |      |      |      |      |      |      |

**Operating and environmental conditions**

| Piston Ø                                     |       | 6                                                                                          | 10           | 12        | 16          | 20 | 25         | 32 | 40 | 50        | 63 | 80         | 100 |
|----------------------------------------------|-------|--------------------------------------------------------------------------------------------|--------------|-----------|-------------|----|------------|----|----|-----------|----|------------|-----|
| Operating pressure                           |       |                                                                                            |              |           |             |    |            |    |    |           |    |            |     |
|                                              | [MPa] | 0.2 ... 0.8                                                                                | 0.15 ... 0.8 | 0.2 ... 1 |             |    | 0.15 ... 1 |    |    | 0.1 ... 1 |    | 0.05 ... 1 |     |
|                                              | [bar] | 2 ... 8                                                                                    | 1.5 ... 8    | 2 ... 10  |             |    | 1.5 ... 10 |    |    | 1 ... 10  |    | 0.5 ... 10 |     |
| Operating medium                             |       | Compressed air to ISO 8573-1:2010 [7:4:4]                                                  |              |           |             |    |            |    |    |           |    |            |     |
| Note on the operating/<br>pilot medium       |       | Lubricated operation possible (in which case lubricated operation will always be required) |              |           |             |    |            |    |    |           |    |            |     |
| Ambient temperature <sup>1)</sup>            |       |                                                                                            |              |           |             |    |            |    |    |           |    |            |     |
| DFM-...-GF                                   | [°C]  | -10 ... +60                                                                                |              |           | -20 ... +80 |    |            |    |    |           |    |            |     |
| DFM-...-KF                                   | [°C]  | -                                                                                          |              |           | -5 ... +60  |    |            |    |    |           |    |            |     |
| Corrosion resistance class CRC <sup>2)</sup> |       | 1 - Low corrosion stress                                                                   |              |           |             |    |            |    |    |           |    |            |     |
| Cleanroom class                              |       | 6 according to ISO 14644-1                                                                 |              |           |             |    |            |    |    |           |    |            |     |
| ATEX                                         |       | Selected types → <a href="http://www.festo.com">www.festo.com</a>                          |              |           |             |    |            |    |    |           |    |            |     |

1) Note operating range of proximity switches

2) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

**Speeds [m/s]**

| Piston Ø                 | 6   | 10  | 12  | 16  | 20  | 25  | 32  | 40  | 50  | 63  | 80  | 100 |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>Cushioning P</b>      |     |     |     |     |     |     |     |     |     |     |     |     |
| Maximum speed advancing  | 1.3 | 1.7 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.6 | 0.6 | 0.4 | 0.4 |
| Maximum speed retracting | 1.1 | 1.6 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.6 | 0.6 | 0.4 | 0.4 |

## Datasheet

| Forces [N]                                               |    |    |    |     |     |     |     |     |      |      |      |      |
|----------------------------------------------------------|----|----|----|-----|-----|-----|-----|-----|------|------|------|------|
| Piston Ø                                                 | 6  | 10 | 12 | 16  | 20  | 25  | 32  | 40  | 50   | 63   | 80   | 100  |
| Theoretical force at 0.6 MPa (6 bar, 87 psi), advancing  | 17 | 47 | 68 | 121 | 188 | 295 | 482 | 754 | 1178 | 1870 | 3016 | 4712 |
| Theoretical force at 0.6 MPa (6 bar, 87 psi), retracting | 13 | 40 | 51 | 90  | 141 | 247 | 415 | 686 | 1057 | 1750 | 2827 | 4418 |

| Impact energy [J]                       |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------------------------------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Piston Ø                                | 6     | 10    | 12   | 16   | 20   | 25   | 32   | 40   | 50   | 63   | 80   | 100  |
| Max. impact energy in the end positions | 0.012 | 0.035 | 0.07 | 0.15 | 0.20 | 0.30 | 0.40 | 0.70 | 1.00 | 1.30 | 0.75 | 1.00 |

Permissible impact velocity:

$$v = \sqrt{\frac{2 \cdot E}{m_1 + m_2}}$$

v Permissible impact speed

E Max. impact energy

m<sub>1</sub> Moving mass (drive)m<sub>2</sub> Moving payload

Maximum permissible mass:

$$m_2 = \frac{2 \cdot E}{v^2} - m_1$$

**Note**

These specifications represent the maximum values that can be achieved. The maximum permissible impact energy must be observed.

| DFM with plain-bearing guide GF |          |      |     |      |      |      |      |      |      |       |       |       |
|---------------------------------|----------|------|-----|------|------|------|------|------|------|-------|-------|-------|
| Stroke [mm]                     | Piston Ø |      |     |      |      |      |      |      |      |       |       |       |
|                                 | 6        | 10   | 12  | 16   | 20   | 25   | 32   | 40   | 50   | 63    | 80    | 100   |
| Product weight [g]              |          |      |     |      |      |      |      |      |      |       |       |       |
| 5                               | 28       | 38   | –   | –    | –    | –    | –    | –    | –    | –     | –     | –     |
| 10                              | 33       | 45.5 | 344 | 444  | –    | –    | –    | –    | –    | –     | –     | –     |
| 15                              | 39.5     | 53.5 | –   | –    | –    | –    | –    | –    | –    | –     | –     | –     |
| 20                              | 45       | 60.5 | 392 | 507  | 769  | 1256 | 1793 | –    | –    | –     | –     | –     |
| 25                              | –        | –    | 411 | 534  | 806  | 1308 | 1858 | 2217 | 3440 | 4470  | 6984  | 11000 |
| 30                              | –        | –    | 435 | 565  | 850  | 1368 | 1937 | –    | –    | –     | –     | –     |
| 40                              | –        | –    | 497 | 710  | 1070 | 1515 | 2095 | –    | –    | –     | –     | –     |
| 50                              | –        | –    | 544 | 772  | 1158 | 1635 | 2254 | 2655 | 4085 | 5243  | 8185  | 12589 |
| 80                              | –        | –    | 688 | 960  | 1422 | 1993 | 2808 | 3261 | 5013 | 6287  | 9743  | 14699 |
| 100                             | –        | –    | 779 | 1081 | 1592 | 2225 | 3111 | 3595 | 5511 | 6904  | 10482 | 15760 |
| 125                             | –        | –    | –   | –    | –    | –    | 3595 | 4123 | 6302 | 7824  | 11490 | 17094 |
| 160                             | –        | –    | –   | –    | –    | –    | 4149 | 4736 | 7205 | 8906  | 12910 | 18980 |
| 200                             | –        | –    | –   | –    | –    | –    | 4781 | 5437 | 8238 | 10142 | 14363 | 21148 |
| Moving mass [g]                 |          |      |     |      |      |      |      |      |      |       |       |       |
| 5                               | 8        | 13   | –   | –    | –    | –    | –    | –    | –    | –     | –     | –     |
| 10                              | 9        | 16   | 172 | 221  | –    | –    | –    | –    | –    | –     | –     | –     |
| 15                              | 11.5     | 18.5 | –   | –    | –    | –    | –    | –    | –    | –     | –     | –     |
| 20                              | 13       | 21   | 186 | 242  | 385  | 650  | 1020 | –    | –    | –     | –     | –     |
| 25                              | –        | –    | 193 | 253  | 400  | 669  | 1049 | 1228 | 2026 | 2471  | 4141  | 6301  |
| 30                              | –        | –    | 200 | 264  | 415  | 687  | 1077 | –    | –    | –     | –     | –     |
| 40                              | –        | –    | 232 | 343  | 552  | 755  | 1134 | –    | –    | –     | –     | –     |
| 50                              | –        | –    | 246 | 364  | 582  | 793  | 1191 | 1371 | 2254 | 2699  | 4717  | 7113  |
| 80                              | –        | –    | 289 | 428  | 672  | 904  | 1450 | 1629 | 2687 | 3130  | 5461  | 8141  |
| 100                             | –        | –    | 318 | 471  | 732  | 979  | 1564 | 1743 | 2870 | 3313  | 5734  | 8523  |
| 125                             | –        | –    | –   | –    | –    | –    | 1803 | 1983 | 3249 | 3692  | 6076  | 9000  |
| 160                             | –        | –    | –   | –    | –    | –    | 2003 | 2183 | 3569 | 4010  | 6553  | 9668  |
| 200                             | –        | –    | –   | –    | –    | –    | 2232 | 2411 | 3935 | 4375  | 7099  | 10431 |

## Datasheet

| DFM with recirculating ball bearing guide KF   |          |     |      |      |      |      |      |      |       |       |
|------------------------------------------------|----------|-----|------|------|------|------|------|------|-------|-------|
| Stroke<br>[mm]                                 | Piston ø |     |      |      |      |      |      |      |       |       |
|                                                | 12       | 16  | 20   | 25   | 32   | 40   | 50   | 63   | 80    | 100   |
| Product weight [g] (for calculation → page 24) |          |     |      |      |      |      |      |      |       |       |
| 10                                             | 314      | 426 | –    | –    | –    | –    | –    | –    | –     | –     |
| 20                                             | 357      | 484 | 747  | 1173 | 1627 | –    | –    | –    | –     | –     |
| 25                                             | 375      | 508 | 781  | 1221 | 1684 | 2043 | 3212 | 4242 | 6506  | 10520 |
| 30                                             | 397      | 537 | 822  | 1278 | 1755 | –    | –    | –    | –     | –     |
| 40                                             | 480      | 641 | 981  | 1411 | 1896 | –    | –    | –    | –     | –     |
| 50                                             | 524      | 699 | 1064 | 1524 | 2038 | 2439 | 3801 | 4959 | 7582  | 11980 |
| 80                                             | 655      | 872 | 1310 | 1863 | 2511 | 2964 | 4614 | 5888 | 8895  | 13612 |
| 100                                            | 737      | 982 | 1468 | 2080 | 2781 | 3265 | 5068 | 6461 | 9500  | 14587 |
| 125                                            | –        | –   | –    | –    | 3189 | 3717 | 5758 | 7279 | 10485 | 15820 |
| 160                                            | –        | –   | –    | –    | 3684 | 4271 | 6583 | 8283 | 11750 | 17545 |
| 200                                            | –        | –   | –    | –    | 4249 | 4905 | 7525 | 9429 | 13214 | 21124 |
| Moving mass [g] (for calculation → page 24)    |          |     |      |      |      |      |      |      |       |       |
| 10                                             | 155      | 212 | –    | –    | –    | –    | –    | –    | –     | –     |
| 20                                             | 165      | 229 | 376  | 595  | 875  | –    | –    | –    | –     | –     |
| 25                                             | 170      | 241 | 388  | 611  | 895  | 1074 | 1796 | 2241 | 3673  | 5696  |
| 30                                             | 175      | 249 | 400  | 626  | 915  | –    | –    | –    | –     | –     |
| 40                                             | 196      | 294 | 488  | 680  | 955  | –    | –    | –    | –     | –     |
| 50                                             | 206      | 310 | 512  | 711  | 996  | 1175 | 1969 | 2413 | 4092  | 6318  |
| 80                                             | 237      | 359 | 584  | 802  | 1173 | 1352 | 2287 | 2731 | 4632  | 7105  |
| 100                                            | 257      | 392 | 632  | 863  | 1254 | 1433 | 2425 | 2868 | 4837  | 7406  |
| 125                                            | –        | –   | –    | –    | 1418 | 1597 | 2703 | 3146 | 5093  | 7782  |
| 160                                            | –        | –   | –    | –    | 1559 | 1738 | 2945 | 3386 | 5451  | 8308  |
| 200                                            | –        | –   | –    | –    | 1720 | 1899 | 3221 | 3660 | 5861  | 8910  |


| DFM with recirculating ball bearing guide KF                          |          |      |      |      |       |       |       |       |       |       |
|-----------------------------------------------------------------------|----------|------|------|------|-------|-------|-------|-------|-------|-------|
| Stroke<br>[mm]                                                        | Piston ø |      |      |      |       |       |       |       |       |       |
|                                                                       | 12       | 16   | 20   | 25   | 32    | 40    | 50    | 63    | 80    | 100   |
| Centre of gravity of the moving mass [mm] (for calculation → page 24) |          |      |      |      |       |       |       |       |       |       |
| 10                                                                    | 13.6     | 13.4 | –    | –    | –     | –     | –     | –     | –     | –     |
| 20                                                                    | 15.2     | 16.5 | 17.5 | 24.6 | 26.3  | –     | –     | –     | –     | –     |
| 25                                                                    | 16.7     | 19.1 | 19.1 | 26.4 | 28.0  | 28.2  | 30.6  | 27.8  | 33.9  | 35.0  |
| 30                                                                    | 18.3     | 20.8 | 20.8 | 28.2 | 29.8  | –     | –     | –     | –     | –     |
| 40                                                                    | 25.3     | 31.2 | 34.6 | 34.9 | 33.4  | –     | –     | –     | –     | –     |
| 50                                                                    | 29.0     | 35.2 | 38.5 | 38.8 | 37.1  | 37.3  | 39.5  | 35.8  | 47.2  | 48.3  |
| 80                                                                    | 40.6     | 47.8 | 50.9 | 50.9 | 54.7  | 53.9  | 57.4  | 51.9  | 66.8  | 67.9  |
| 100                                                                   | 48.8     | 56.5 | 59.4 | 59.4 | 63.0  | 62.1  | 65.6  | 59.4  | 74.1  | 75.2  |
| 125                                                                   | –        | –    | –    | –    | 80.9  | 79.0  | 82.8  | 75.2  | 84.1  | 85.2  |
| 160                                                                   | –        | –    | –    | –    | 96.4  | 94.4  | 98.1  | 89.6  | 98.4  | 99.5  |
| 200                                                                   | –        | –    | –    | –    | 114.6 | 112.3 | 115.9 | 106.5 | 115.2 | 116.3 |

| Materials              |                                                                    |                |
|------------------------|--------------------------------------------------------------------|----------------|
| Guided drive           |                                                                    |                |
| Piston Ø               | 6, 10                                                              | 12 ... 100     |
| Yoke plate             | Aluminium                                                          | Tempered steel |
| Housing                | Anodised wrought aluminium alloy                                   |                |
| Piston rod             | High-alloy stainless steel                                         |                |
| Guide rods             |                                                                    |                |
| DFM-...-GF             | High-alloy stainless steel                                         |                |
| DFM-...-KF             | Quenched and tempered steel, hard-chrome plated                    |                |
| Static seals           | Nitrile rubber                                                     |                |
| Dynamic seals          | Polyurethane, HNBR                                                 | Polyurethane   |
| Note on materials      | RoHS-compliant                                                     |                |
| LABS (PWIS) conformity | VDMA24364-B1/B2-L                                                  |                |
| DFM-...-F1A            | Suitable for battery production with reduced Cu/Zn/Ni values (F1a) |                |

## Datasheet

## Maximum payload F [N]

Plain-bearing guide GF and recirculating ball bearing guide KF



[1] Centre of gravity of payload

| Piston ø | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80  | 100 |
|----------|---|----|----|----|----|----|----|----|----|----|-----|-----|
| XS [mm]  | 5 | 5  | 25 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 125 | 125 |

| Stroke<br>[mm] |    | Piston ø |     |    |    |     |     |     |     |     |     |     |     |
|----------------|----|----------|-----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|
|                |    | 6        | 10  | 12 | 16 | 20  | 25  | 32  | 40  | 50  | 63  | 80  | 100 |
| 5              | GF | 1.1      | 3.7 | –  | –  | –   | –   | –   | –   | –   | –   | –   | –   |
| 10             | GF | 0.85     | 3.0 | 29 | 30 | –   | –   | –   | –   | –   | –   | –   | –   |
|                | KF | –        | –   | 38 | 45 | –   | –   | –   | –   | –   | –   | –   | –   |
| 15             | GF | 0.7      | 2.5 | –  | –  | –   | –   | –   | –   | –   | –   | –   | –   |
| 20             | GF | 0.6      | 2.1 | 25 | 27 | 30  | 121 | 188 | –   | –   | –   | –   | –   |
|                | KF | –        | –   | 33 | 41 | 46  | 110 | 155 | –   | –   | –   | –   | –   |
| 25             | GF | –        | –   | 23 | 25 | 28  | 116 | 180 | 180 | 257 | 257 | 276 | 452 |
|                | KF | –        | –   | 31 | 39 | 44  | 105 | 149 | 149 | 235 | 235 | 220 | 332 |
| 30             | GF | –        | –   | 22 | 24 | 27  | 112 | 173 | –   | –   | –   | –   | –   |
|                | KF | –        | –   | 29 | 37 | 42  | 102 | 144 | –   | –   | –   | –   | –   |
| 40             | GF | –        | –   | 31 | 73 | 110 | 123 | 161 | –   | –   | –   | –   | –   |
|                | KF | –        | –   | 35 | 82 | 108 | 119 | 135 | –   | –   | –   | –   | –   |
| 50             | GF | –        | –   | 28 | 67 | 103 | 115 | 150 | 150 | 216 | 216 | 311 | 509 |
|                | KF | –        | –   | 32 | 77 | 102 | 112 | 126 | 126 | 202 | 202 | 275 | 415 |
| 80             | GF | –        | –   | 22 | 55 | 86  | 96  | 166 | 166 | 234 | 234 | 352 | 568 |
|                | KF | –        | –   | 25 | 64 | 86  | 95  | 151 | 151 | 233 | 233 | 329 | 495 |
| 100            | GF | –        | –   | 19 | 49 | 77  | 86  | 150 | 150 | 212 | 212 | 329 | 533 |
|                | KF | –        | –   | 22 | 58 | 78  | 86  | 138 | 138 | 214 | 214 | 318 | 480 |
| 125            | GF | –        | –   | –  | –  | –   | –   | 168 | 168 | 229 | 229 | 304 | 494 |
|                | KF | –        | –   | –  | –  | –   | –   | 161 | 161 | 238 | 238 | 306 | 463 |
| 160            | GF | –        | –   | –  | –  | –   | –   | 146 | 146 | 200 | 200 | 274 | 446 |
|                | KF | –        | –   | –  | –  | –   | –   | 143 | 143 | 212 | 212 | 291 | 442 |
| 200            | GF | –        | –   | –  | –  | –   | –   | 127 | 127 | 174 | 174 | 245 | 400 |
|                | KF | –        | –   | –  | –  | –   | –   | 127 | 127 | 189 | 189 | 277 | 422 |




## Note

For calculating eccentric load cases for DFM-...-  
KF → page 20

## Datasheet

## Permissible torque load M [Nm]

Plain-bearing guide GF and recirculating ball bearing guide KF



| Stroke<br>[mm] |    | Piston ø |       |      |      |      |      |       |       |       |       |       |       |
|----------------|----|----------|-------|------|------|------|------|-------|-------|-------|-------|-------|-------|
|                |    | 6        | 10    | 12   | 16   | 20   | 25   | 32    | 40    | 50    | 63    | 80    | 100   |
| 5              | GF | 0.011    | 0.057 | –    | –    | –    | –    | –     | –     | –     | –     | –     | –     |
| 10             | GF | 0.008    | 0.046 | 0.92 | 1.44 | –    | –    | –     | –     | –     | –     | –     | –     |
|                | KF | –        | –     | 1.21 | 2.19 | –    | –    | –     | –     | –     | –     | –     | –     |
| 15             | GF | 0.007    | 0.039 | –    | –    | –    | –    | –     | –     | –     | –     | –     | –     |
| 20             | GF | 0.006    | 0.034 | 0.75 | 1.17 | 1.61 | 6.27 | 10.66 | –     | –     | –     | –     | –     |
|                | KF | –        | –     | 0.98 | 1.79 | 2.43 | 6.14 | 9.62  | –     | –     | –     | –     | –     |
| 25             | GF | –        | –     | 0.68 | 1.07 | 1.47 | 5.90 | 10.06 | 11.30 | 19.40 | 21.81 | 41.01 | 76.99 |
|                | KF | –        | –     | 0.90 | 1.64 | 2.24 | 5.77 | 9.08  | 10.25 | 19.35 | 21.98 | 34.06 | 60.83 |
| 30             | GF | –        | –     | 0.63 | 0.98 | 1.36 | 5.57 | 9.53  | –     | –     | –     | –     | –     |
|                | KF | –        | –     | 0.82 | 1.52 | 2.08 | 5.43 | 8.60  | –     | –     | –     | –     | –     |
| 40             | GF | –        | –     | 0.81 | 2.44 | 4.21 | 5.76 | 8.60  | –     | –     | –     | –     | –     |
|                | KF | –        | –     | 0.93 | 2.92 | 4.64 | 5.94 | 7.77  | –     | –     | –     | –     | –     |
| 50             | GF | –        | –     | 0.73 | 2.20 | 3.85 | 5.26 | 7.83  | 8.78  | 15.44 | 17.30 | 40.09 | 76.16 |
|                | KF | –        | –     | 0.83 | 2.63 | 4.23 | 5.43 | 7.09  | 8.00  | 15.51 | 17.62 | 35.04 | 63.12 |
| 80             | GF | –        | –     | 0.55 | 1.69 | 3.04 | 4.17 | 8.01  | 8.98  | 15.60 | 17.48 | 40.34 | 76.75 |
|                | KF | –        | –     | 0.62 | 2.03 | 3.36 | 4.33 | 7.71  | 8.70  | 16.43 | 18.67 | 36.64 | 65.84 |
| 100            | GF | –        | –     | 0.47 | 1.46 | 2.66 | 3.64 | 7.08  | 7.94  | 13.89 | 15.54 | 36.70 | 70.12 |
|                | KF | –        | –     | 0.53 | 1.77 | 2.95 | 3.81 | 6.86  | 7.74  | 14.76 | 16.77 | 33.30 | 60.05 |
| 125            | GF | –        | –     | –    | –    | –    | –    | 7.65  | 8.57  | 14.47 | 16.19 | 32.90 | 63.14 |
|                | KF | –        | –     | –    | –    | –    | –    | 7.66  | 8.64  | 15.77 | 17.92 | 29.83 | 53.98 |
| 160            | GF | –        | –     | –    | –    | –    | –    | 6.54  | 7.32  | 12.43 | 13.87 | 28.59 | 55.17 |
|                | KF | –        | –     | –    | –    | –    | –    | 6.64  | 7.49  | 13.78 | 15.66 | 25.91 | 47.08 |
| 200            | GF | –        | –     | –    | –    | –    | –    | 5.57  | 6.23  | 10.62 | 11.81 | 24.68 | 47.91 |
|                | KF | –        | –     | –    | –    | –    | –    | 5.76  | 6.50  | 12.04 | 13.68 | 22.39 | 40.82 |



## Note

Engineering tool

→ [www.festo.com/engineeringtools](http://www.festo.com/engineeringtools)

## Note


For calculating eccentric load cases for DFM-...-

KF → page 20

# Datasheet


## Torsional backlash $\rho$

Plain-bearing guide GF and recirculating ball bearing guide KF in retracted state, unloaded



| Piston $\varnothing$           |    | 6    | 10   | 12    | 16    | 20    | 25    | 32    | 40    | 50    | 63    | 80    | 100   |
|--------------------------------|----|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Average torsional backlash [°] | GF | ±0.1 | ±0.1 | ±0.06 | ±0.06 | ±0.05 | ±0.04 | ±0.04 | ±0.03 | ±0.03 | ±0.02 | ±0.03 | ±0.03 |
| Torsional backlash [°]         | KF | —    | —    | ±0.03 | ±0.02 | ±0.02 | ±0.02 | ±0.01 | ±0.01 | ±0.02 | ±0.02 | ±0.03 | ±0.03 |

## Deflection of the end plate



$$f = f_1 + f_2$$

$f$  = total deflection of the end plate

$f_1$  = deflection due to average bearing clearance (GF)/bearing clearance (KF)


Bearing clearance GF with production tolerance ±0.01 mm

Bearing clearance KF determined through series of tests

$f_2$  = deflection due to transverse force

## Deflection $f_1$ due to bearing clearance as a function of stroke $l$ (with no load)


1 bearing per guide rod



GF: DFM-6/10 All strokes


DFM-16/20 Stroke ≤ 30 mm

KF: DFM-12/16/20 Stroke ≤ 30 mm

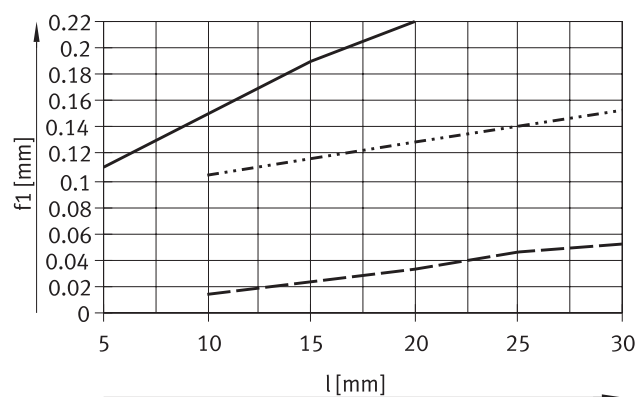

— Plain-bearing guide GF (average deflection  $f_1$ ) for  $\varnothing$  6/10  
 ..... Plain-bearing guide GF (average deflection  $f_1$ ) for  $\varnothing$  12 ... 100  
 - - - Recirculating ball bearing guide KF


2 bearing per guide rod



GF: DFM-12 Stroke ≤ 30 mm

GF+KF: DFM-12/16/20 Stroke ≥ 40 mm

DFM-25 ... 100 All strokes

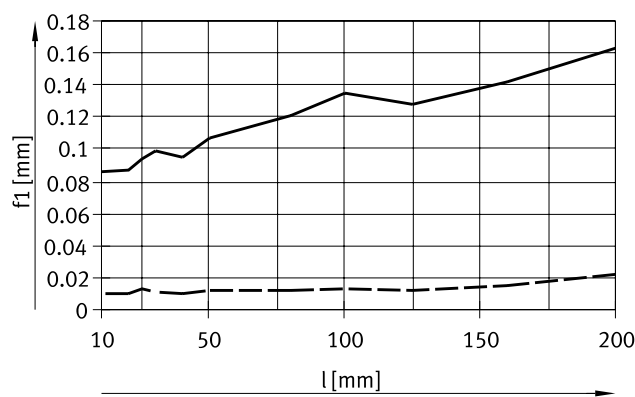

— Plain-bearing guide GF (average deflection  $f_1$ )  
 - - - Recirculating ball bearing guide KF  
 ..... GF+KF


## Datasheet

### Use as stopper cylinder

When used as a stopper cylinder, only guided drives with plain-bearing guide DFM-...-GF may be used.

In addition, the distance  $l_{\max}$  (→ drawing) must not be exceeded.


The permissible kinetic impact energy at the end stop must also not be exceeded.

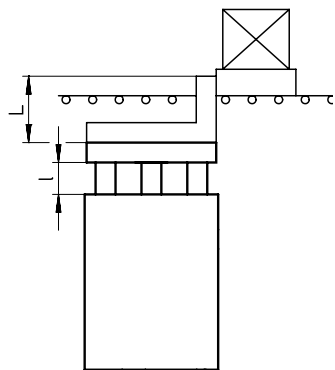


$$l_{\max} = \text{stroke } l + \text{height of stop bracket } L$$

$$l_{\max} = 50 \text{ mm}$$

### Impact mass $m$ as a function of impact velocity $v$

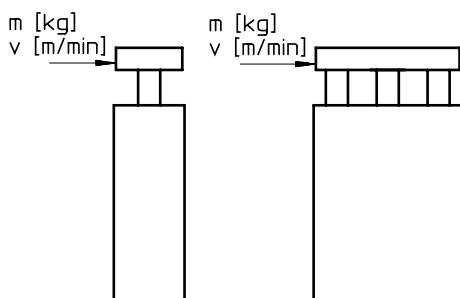


#### DFM-12 ... 25-GF, stroke < 30 mm

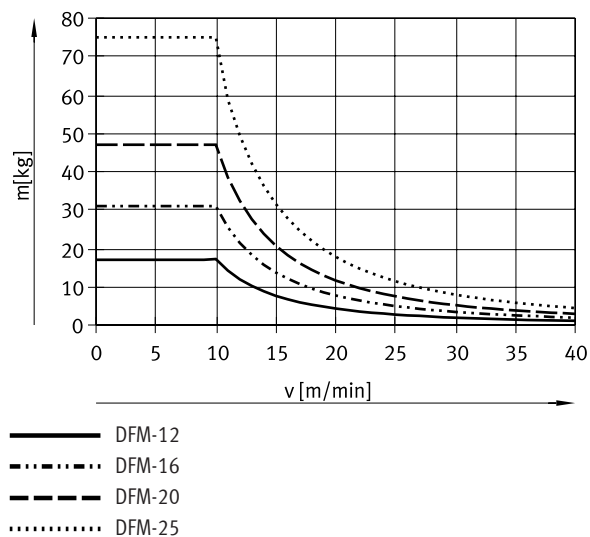

The values in the above graph are based on the assumption that the workpiece carrier is fitted with an elastic buffer with deformation of 1 mm. Only guided drives with a plain-bearing guide GF < 30 mm stroke may be used.


#### DFM-32 ... 100-GF, stroke < 50 mm

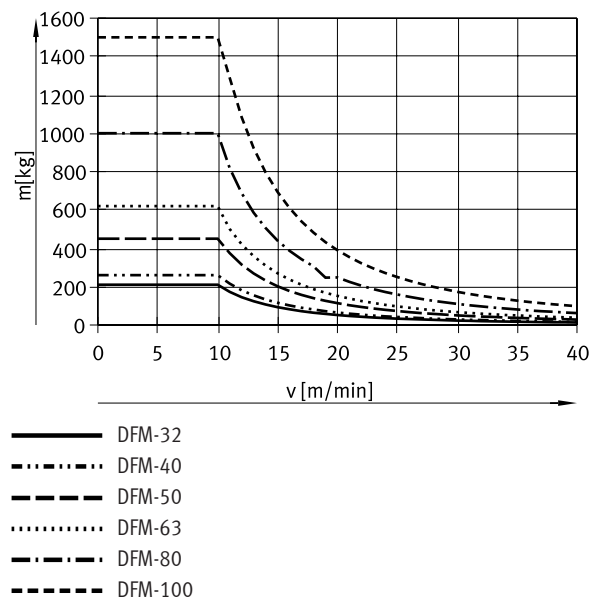

The values in the above graph are based on the assumption that the workpiece carrier is fitted with an elastic buffer with deformation of 2 mm. Only guided drives with a plain-bearing guide GF < 50 mm stroke may be used.

Datasheet

Use as a lifting cylinder  
Permissible load with plain-bearing guide GF

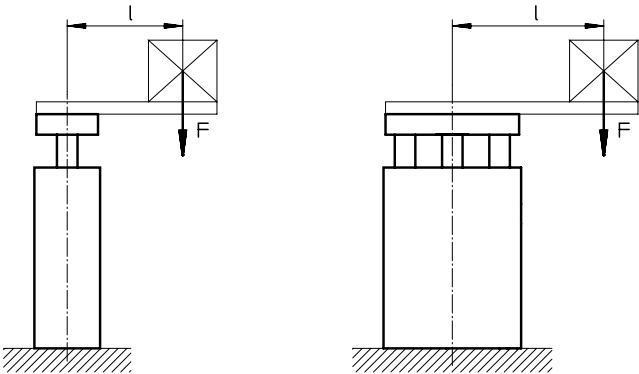

Permissible eccentric load at 0.6 MPa (6 bar, 87 psi):

| Piston ø |     | 12 | 16 | 20 | 25  | 32  | 40  | 50  | 63  | 80   | 100  |
|----------|-----|----|----|----|-----|-----|-----|-----|-----|------|------|
| Load     | [N] | 27 | 48 | 85 | 133 | 241 | 415 | 648 | 935 | 1508 | 2356 |

Permissible eccentric load at a different pressure:


| Piston Ø | 12  | 16                 | 20 | 25                 | 32 | 63                 | 80 | 100                | 40 | 50 |
|----------|-----|--------------------|----|--------------------|----|--------------------|----|--------------------|----|----|
| Load     | [%] | ≤ 40 <sup>1)</sup> |    | ≤ 45 <sup>1)</sup> |    | ≤ 50 <sup>1)</sup> |    | ≤ 55 <sup>1)</sup> |    |    |

1) The theoretical longitudinal force at the corresponding pressure

F = longitudinal force [N]


l = lever arm [mm]

DFM-12 ... 25-GF, stroke up to 30 mm

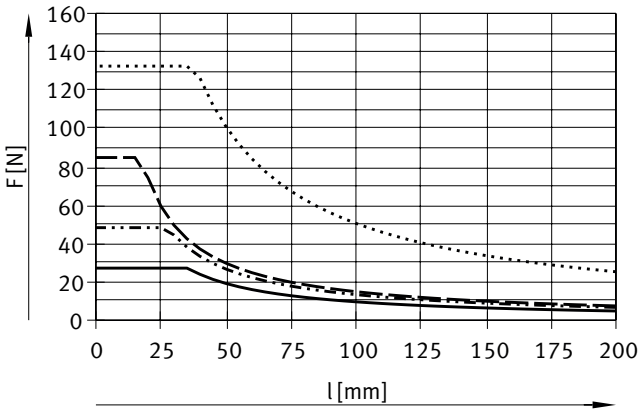


- DFM-12
- DFM-16
- DFM-20
- DFM-25

DFM-12 ... 25-GF, stroke 40 ... 100 mm

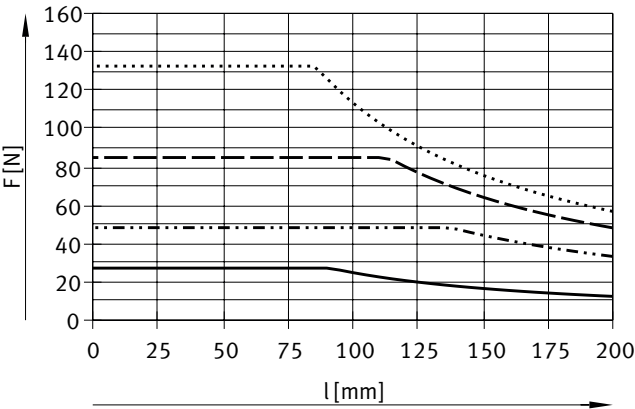


- DFM-12
- DFM-16
- DFM-20
- DFM-25

DFM-32 ... 63-GF, stroke up to 50 mm

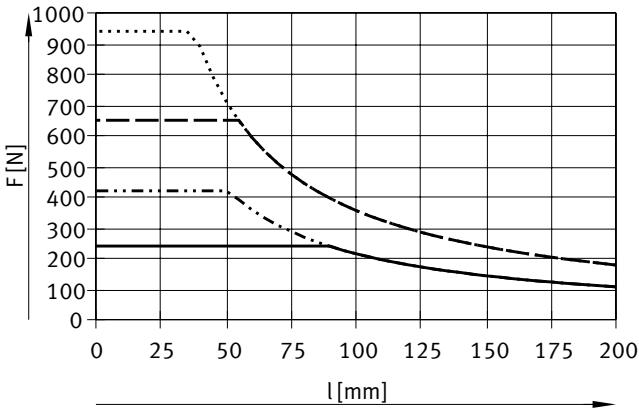

- DFM-32
- DFM-40
- DFM-50
- DFM-63

DFM-32 ... 63-GF, stroke 80 ... 100 mm

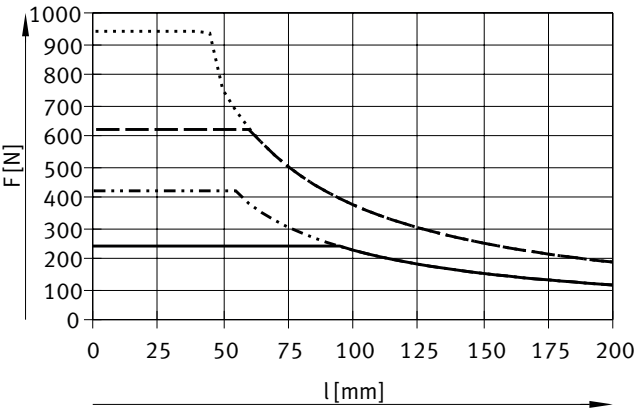


- DFM-32
- DFM-40
- DFM-50
- DFM-63

Datasheet

Use as a lifting cylinder

Permissible load with plain-bearing guide GF

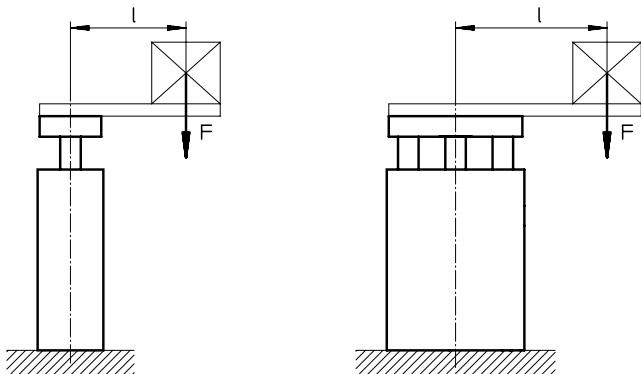

Permissible eccentric load at 0.6 MPa (6 bar, 87 psi):

| Piston Ø | 12 | 16 | 20 | 25  | 32  | 40  | 50  | 63  | 80   | 100  |
|----------|----|----|----|-----|-----|-----|-----|-----|------|------|
| Load [N] | 27 | 48 | 85 | 133 | 241 | 415 | 648 | 935 | 1508 | 2356 |

Permissible eccentric load at a different pressure:


| Piston Ø | 12             | 16 | 20             | 25 | 32             | 63 | 80 | 100 | 40             | 50 |
|----------|----------------|----|----------------|----|----------------|----|----|-----|----------------|----|
| Load [%] | $\leq 40^{1)}$ |    | $\leq 45^{1)}$ |    | $\leq 50^{1)}$ |    |    |     | $\leq 55^{1)}$ |    |

1) The theoretical longitudinal force at the corresponding pressure

F = longitudinal force [N]


l = lever arm [mm]

DFM-32 ... 63-GF, stroke 125 ... 200 mm

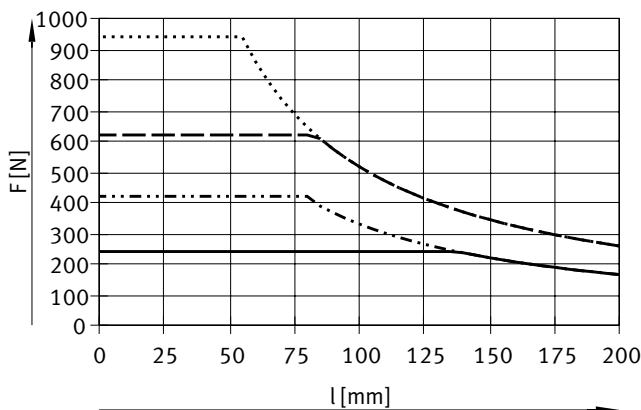


— DFM-32  
- - - DFM-40  
- · - DFM-50  
····· DFM-63

DFM-80 ... 100-GF, stroke 25 mm

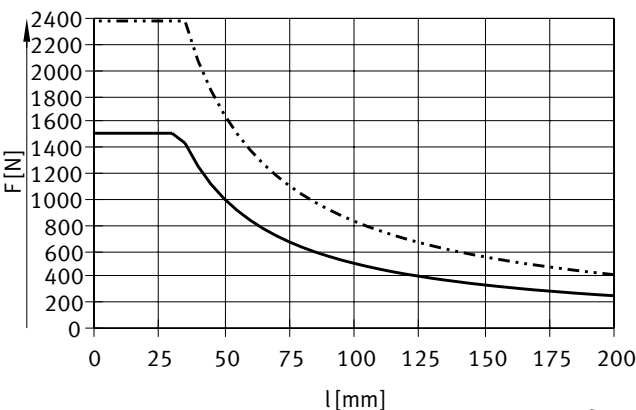


— DFM-80  
- - - DFM-100

DFM-80 ... 100-GF, stroke 50 mm

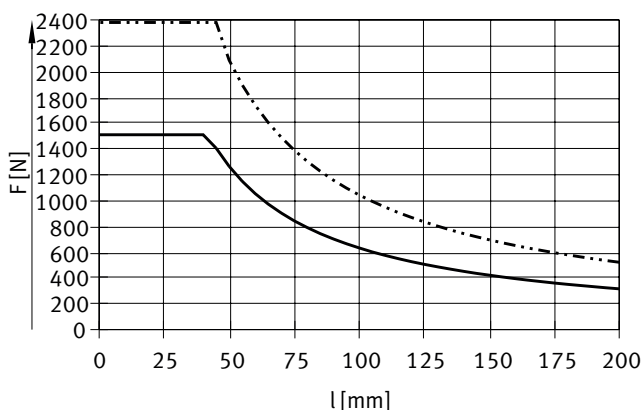

— DFM-80  
- - - DFM-100


DFM-80 ... 100-GF, stroke 80 ... 200 mm

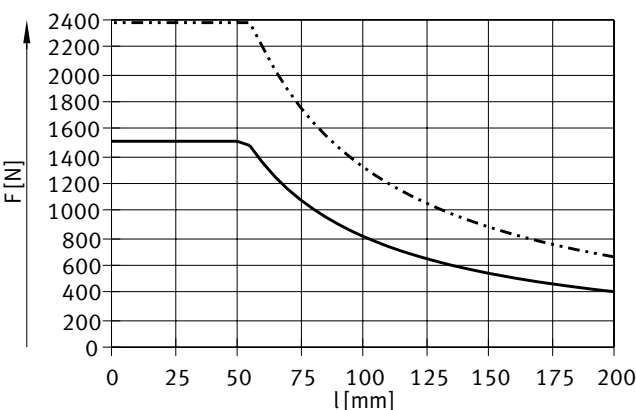

— DFM-80  
- - - DFM-100

Datasheet

Use as a lifting cylinder  
Permissible load with recirculating ball bearing guide KF

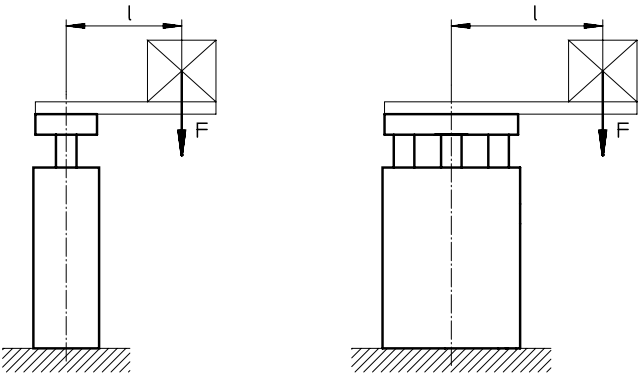

Permissible eccentric load at 0.6 MPa (6 bar, 87 psi):

| Piston ø |     | 12 | 16 | 20 | 25  | 32  | 40  | 50  | 63  | 80   | 100  |
|----------|-----|----|----|----|-----|-----|-----|-----|-----|------|------|
| Load     | [N] | 27 | 48 | 85 | 133 | 241 | 415 | 648 | 935 | 1508 | 2356 |

Permissible eccentric load at a different pressure:


| Piston Ø | 12  | 16                 | 20 | 25                 | 32 | 63                 | 80 | 100                | 40 | 50 |
|----------|-----|--------------------|----|--------------------|----|--------------------|----|--------------------|----|----|
| Load     | [%] | ≤ 40 <sup>1)</sup> |    | ≤ 45 <sup>1)</sup> |    | ≤ 50 <sup>1)</sup> |    | ≤ 55 <sup>1)</sup> |    |    |

1) The theoretical longitudinal force at the corresponding pressure

F = longitudinal force [N]


l = lever arm [mm]

DFM-12 ... 25-KF, stroke up to 30 mm

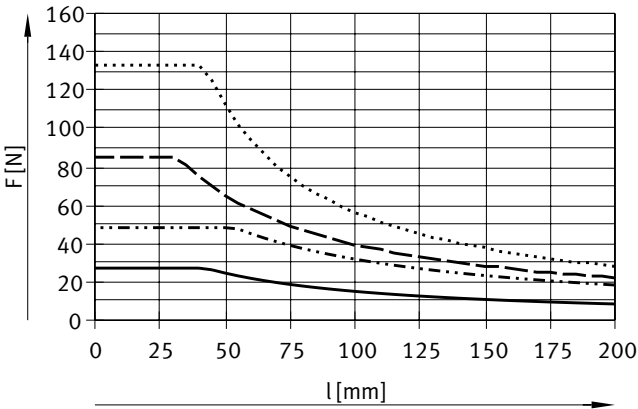


- DFM-12
- DFM-16
- DFM-20
- DFM-25

DFM-12 ... 25-KF, stroke 40 ... 100 mm

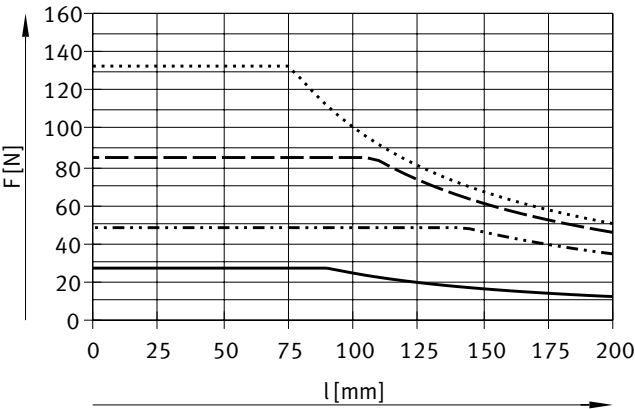


- DFM-12
- DFM-16
- DFM-20
- DFM-25

DFM-32 ... 63-KF, stroke up to 50 mm

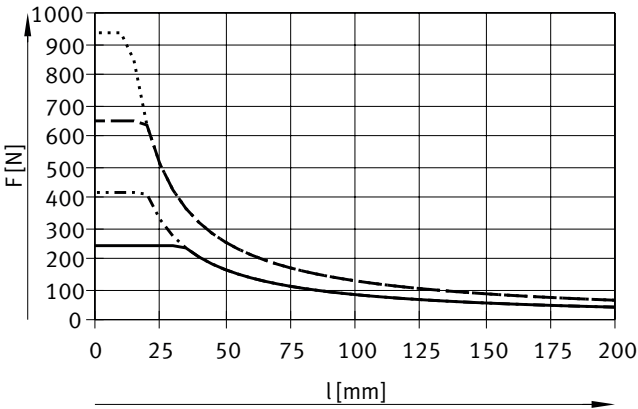

- DFM-32
- DFM-40
- DFM-50
- DFM-63

DFM-32 ... 63-KF, stroke 80 ... 100 mm

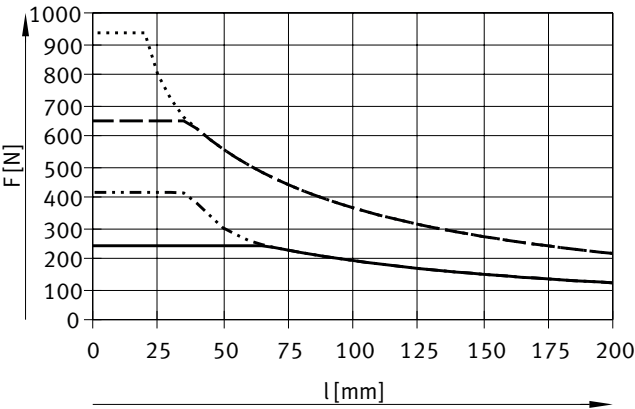


- DFM-32
- DFM-40
- DFM-50
- DFM-63

## Datasheet

## Use as a lifting cylinder

Permissible load with recirculating ball bearing guide KF

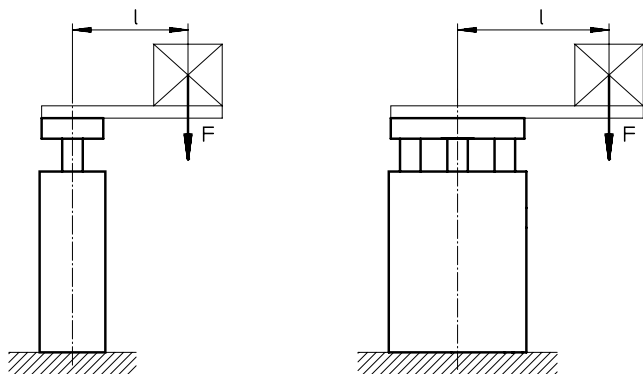

Permissible eccentric load at 0.6 MPa (6 bar, 87 psi):

| Piston Ø | 12 | 16 | 20 | 25  | 32  | 40  | 50  | 63  | 80   | 100  |
|----------|----|----|----|-----|-----|-----|-----|-----|------|------|
| Load [N] | 27 | 48 | 85 | 133 | 241 | 415 | 648 | 935 | 1508 | 2356 |

Permissible eccentric load at a different pressure:


| Piston Ø | 12             | 16 | 20             | 25 | 32             | 63 | 80 | 100 | 40             | 50 |
|----------|----------------|----|----------------|----|----------------|----|----|-----|----------------|----|
| Load [%] | $\leq 40^{1)}$ |    | $\leq 45^{1)}$ |    | $\leq 50^{1)}$ |    |    |     | $\leq 55^{1)}$ |    |

1) The theoretical longitudinal force at the corresponding pressure

F = longitudinal force [N]


l = lever arm [mm]

DFM-32 ... 63-KF, stroke 125 ... 200 mm

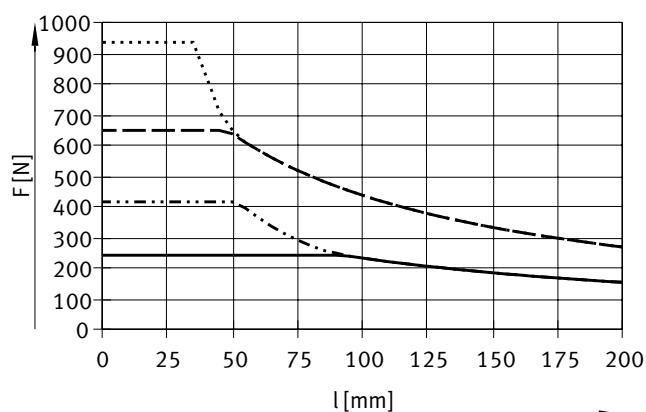


— DFM-32  
 ..... DFM-40  
 --- DFM-50  
 - · - · - DFM-63

DFM-80 ... 100-KF, stroke 25 mm

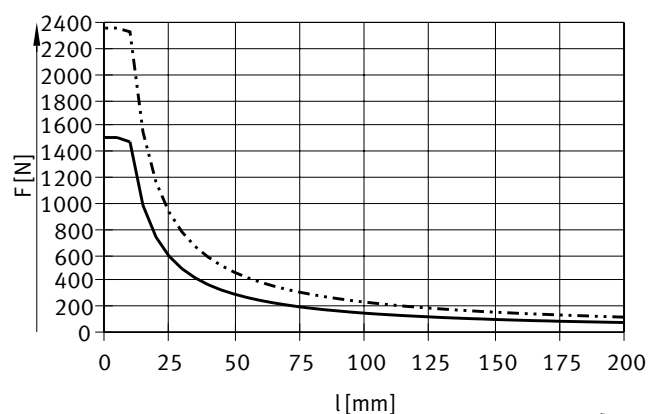


— DFM-80  
 ..... DFM-100

DFM-80 ... 100-KF, stroke 50 mm

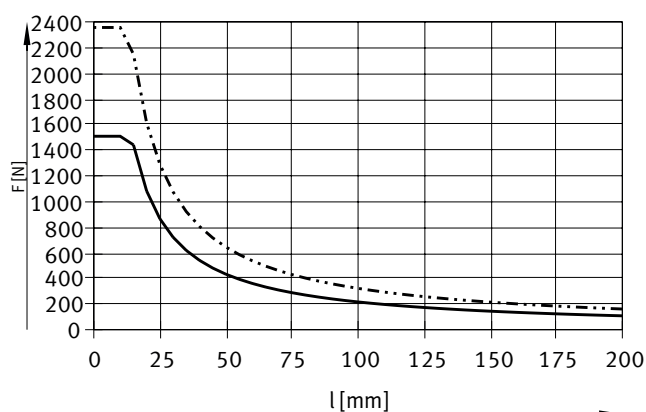

— DFM-80  
 ..... DFM-100

DFM-80 ... 100-KF, stroke 80 ... 200 mm


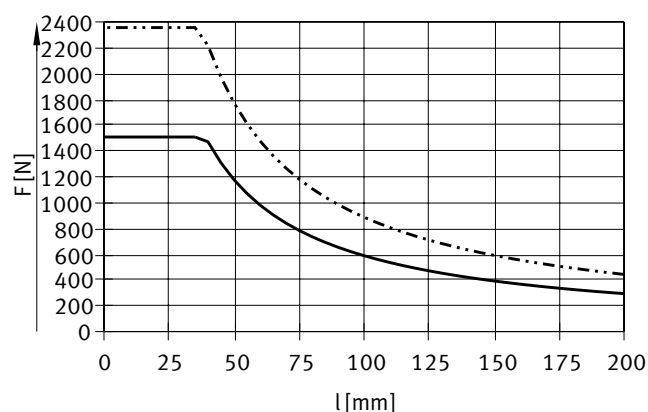


— DFM-80  
 ..... DFM-100

## Datasheet

### Load values

The indicated forces and torques refer to the centre of the guide.

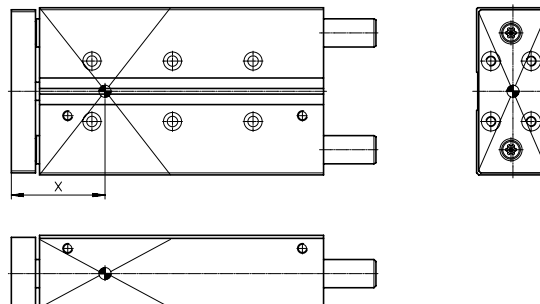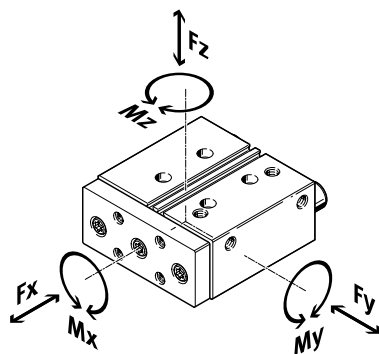

If several of the forces and torques listed below act simultaneously on the guided drive, the following equation must be fulfilled in addition to the maximum loads listed:

Calculating the load comparison factor:

$$f_c = \frac{|F_{zx}|}{F_{zx}} + \frac{|M_{zx}|}{M_{zx}} + \frac{|F_{zy}|}{F_{zy}} + \frac{|M_{zy}|}{M_{zy}} + \frac{|F_{xz}|}{F_{xz}} + \frac{|M_{xz}|}{M_{xz}} \leq 1$$

## Datasheet


| Distance X (for calculation → page 24) |                |                     |          |                |                     |
|----------------------------------------|----------------|---------------------|----------|----------------|---------------------|
| Piston Ø                               | Stroke<br>[mm] | Dimension X<br>[mm] | Piston Ø | Stroke<br>[mm] | Dimension X<br>[mm] |
| 12                                     | 10 ... 30      | 26.1                | 40       | 25 ... 50      | 47.5                |
|                                        | 40 ... 100     | 35.3                |          | 80 ... 100     | 56.5                |
|                                        |                |                     |          | 125 ... 200    | 66.5                |
| 16                                     | 10 ... 30      | 25.5                | 50       | 25 ... 50      | 54.5                |
|                                        | 40 ... 100     | 38.5                |          | 80 ... 100     | 65                  |
|                                        |                |                     |          | 125 ... 200    | 75                  |
| 20                                     | 20 ... 30      | 28.5                | 63       | 25 ... 50      | 54.5                |
|                                        | 40 ... 100     | 46.5                |          | 80 ... 100     | 65                  |
|                                        |                |                     |          | 125 ... 200    | 75                  |
| 25                                     | 20 ... 30      | 42.5                | 80       | 25             | 66.5                |
|                                        | 40 ... 100     | 47.5                |          | 50             | 77                  |
|                                        |                |                     |          | 80 ... 200     | 92                  |
| 32                                     | 20 ... 50      | 47.5                | 100      | 25             | 73                  |
|                                        | 80 ... 100     | 56.5                |          | 50             | 84                  |
|                                        | 125 ... 200    | 66.5                |          | 80 ... 200     | 99                  |

## Datasheet

**Max. permissible forces and torques for plain-bearing guide GF**

The indicated forces and torques refer  
to the centre of the guide.

| Piston Ø | Stroke<br>[mm] | Static/dynamic (for a service life of 10000 km) |                        |                                     |
|----------|----------------|-------------------------------------------------|------------------------|-------------------------------------|
|          |                | $F_{y_{max.}}/F_{z_{max.}}$<br>[N]              | $M_{x_{max.}}$<br>[Nm] | $M_{y_{max.}}/M_{z_{max.}}$<br>[Nm] |
| 12       | 10 ... 30      | 240                                             | 4.92                   | 2.06                                |
|          | 40 ... 100     | 240                                             | 4.92                   | 3.74                                |
| 16       | 10 ... 30      | 304                                             | 6.99                   | 2.89                                |
|          | 40 ... 100     | 608                                             | 13.98                  | 10.34                               |
| 20       | 20 ... 30      | 354.7                                           | 10.29                  | 3.37                                |
|          | 40 ... 100     | 709.3                                           | 20.57                  | 16.31                               |
| 25       | 20 ... 30      | 810.7                                           | 27.56                  | 15.4                                |
|          | 40 ... 100     | 810.7                                           | 27.56                  | 19.46                               |
| 32       | 20 ... 50      | 1227                                            | 47.84                  | 24.53                               |
|          | 80 ... 100     | 1227                                            | 47.84                  | 35.57                               |
|          | 125 ... 200    | 1227                                            | 47.84                  | 47.84                               |
| 40       | 25 ... 50      | 1227                                            | 53.97                  | 24.53                               |
|          | 80 ... 100     | 1227                                            | 53.97                  | 35.57                               |
|          | 125 ... 200    | 1227                                            | 53.97                  | 47.84                               |
| 50       | 25 ... 50      | 1533                                            | 84.33                  | 38.33                               |
|          | 80 ... 100     | 1533                                            | 84.33                  | 54.43                               |
|          | 125 ... 200    | 1533                                            | 84.33                  | 69.77                               |
| 63       | 25 ... 50      | 1533                                            | 95.83                  | 38.33                               |
|          | 80 ... 100     | 1533                                            | 95.83                  | 54.43                               |
|          | 125 ... 200    | 1533                                            | 95.83                  | 69.77                               |
| 80       | 25             | 2320                                            | 179.8                  | 67.28                               |
|          | 50             | 2320                                            | 179.8                  | 91.64                               |
|          | 80 ... 200     | 2320                                            | 179.8                  | 126.4                               |
| 100      | 25             | 3640                                            | 342.2                  | 111                                 |
|          | 50             | 3640                                            | 342.2                  | 151.1                               |
|          | 80 ... 200     | 3640                                            | 342.2                  | 205.7                               |

**Note**

For calculating loads attached to the centre of  
the end plate and centrally acting moments


→ Page 12/13

## Datasheet

### Max. permissible forces and torques for recirculating ball bearing guide KF

The indicated forces and torques refer to the centre of the guide.

| Piston ø | Stroke<br>[mm] | Static                             |                        |                                     | Dynamic (for a service life of 10000 km) |                        |                                     |
|----------|----------------|------------------------------------|------------------------|-------------------------------------|------------------------------------------|------------------------|-------------------------------------|
|          |                | $F_{y_{max.}}/F_{z_{max.}}$<br>[N] | $M_{x_{max.}}$<br>[Nm] | $M_{y_{max.}}/M_{z_{max.}}$<br>[Nm] | $F_{y_{max.}}/F_{z_{max.}}$<br>[N]       | $M_{x_{max.}}$<br>[Nm] | $M_{y_{max.}}/M_{z_{max.}}$<br>[Nm] |
| 12       | 10 ... 30      | 355                                | 7.28                   | 3.2                                 | 270                                      | 5.53                   | 2.43                                |
|          | 40 ... 100     | 343                                | 7.04                   | 3.26                                | 375                                      | 7.68                   | 3.56                                |
| 16       | 10 ... 30      | 415                                | 9.55                   | 4.15                                | 389                                      | 8.95                   | 3.89                                |
|          | 40 ... 100     | 830                                | 19.09                  | 11.2                                | 778                                      | 17.9                   | 10.5                                |
| 20       | 20 ... 30      | 510                                | 14.79                  | 5.61                                | 408                                      | 11.84                  | 4.49                                |
|          | 40 ... 100     | 1020                               | 29.58                  | 18.87                               | 817                                      | 23.69                  | 15.11                               |
| 25       | 20 ... 30      | 1060                               | 36.04                  | 15.37                               | 863                                      | 29.35                  | 12.52                               |
|          | 40 ... 100     | 1060                               | 36.04                  | 20.67                               | 863                                      | 29.35                  | 16.83                               |
| 32       | 20 ... 50      | 1260                               | 49.14                  | 20.79                               | 1130                                     | 44.09                  | 18.66                               |
|          | 80 ... 100     | 1260                               | 49.14                  | 32.13                               | 1130                                     | 44.09                  | 28.83                               |
|          | 125 ... 200    | 1260                               | 49.14                  | 44.73                               | 1130                                     | 44.09                  | 40.13                               |
| 40       | 25 ... 50      | 1260                               | 55.44                  | 20.79                               | 1130                                     | 49.74                  | 18.66                               |
|          | 80 ... 100     | 1260                               | 55.44                  | 32.13                               | 1130                                     | 49.74                  | 28.83                               |
|          | 125 ... 200    | 1260                               | 55.44                  | 44.73                               | 1130                                     | 49.74                  | 40.13                               |
| 50       | 25 ... 50      | 1600                               | 88                     | 34.4                                | 1487                                     | 81.79                  | 31.98                               |
|          | 80 ... 100     | 1600                               | 88                     | 51.2                                | 1487                                     | 81.79                  | 47.58                               |
|          | 125 ... 200    | 1600                               | 88                     | 67.2                                | 1487                                     | 81.79                  | 62.46                               |
| 63       | 25 ... 50      | 1600                               | 100                    | 34.4                                | 1487                                     | 92.97                  | 31.98                               |
|          | 80 ... 100     | 1600                               | 100                    | 51.2                                | 1487                                     | 92.97                  | 47.58                               |
|          | 125 ... 200    | 1600                               | 100                    | 67.2                                | 1487                                     | 92.97                  | 62.46                               |
| 80       | 25             | 3120                               | 241.8                  | 73.32                               | 2048                                     | 158.67                 | 48.12                               |
|          | 50             | 3120                               | 241.8                  | 106.1                               | 2048                                     | 158.67                 | 69.62                               |
|          | 80 ... 200     | 3120                               | 241.8                  | 152.9                               | 2048                                     | 158.67                 | 100.35                              |
| 100      | 25             | 5400                               | 507.6                  | 135                                 | 3043                                     | 286.02                 | 76.06                               |
|          | 50             | 5400                               | 507.6                  | 194.4                               | 3043                                     | 286.02                 | 109.53                              |
|          | 80 ... 200     | 5400                               | 507.6                  | 275.4                               | 3043                                     | 286.02                 | 155.16                              |



#### Note

For calculating loads attached to the centre of the end plate and centrally acting moments →  
Page 12/13

## Datasheet

### Calculating the service life for recirculating ball bearing guide KF

The service life of the guide depends on the load. To provide a rough indication of the service life of the guide, the graph below plots the load comparison factor  $f_v$  against the service life ratio  $q$ .

These values are only theoretical. You must consult your local Festo contact for a load comparison factor  $f_v$  greater than 1.5.

#### Load comparison factor $f_v$ as a function of service life ratio $q$

Example: The effect on the service life, deviating from the specified reference service life, can be determined by the service life ratio  $q$ :


Where:

Reference service life = 10000 km

Required service life = 3000 km

$$q = \frac{3000 \text{ km}}{10000 \text{ km}} = 0.3$$

The graph gives a load comparison factor  $f_v$  of 1.5. This means that the permissible total load can be utilised up to 150%.

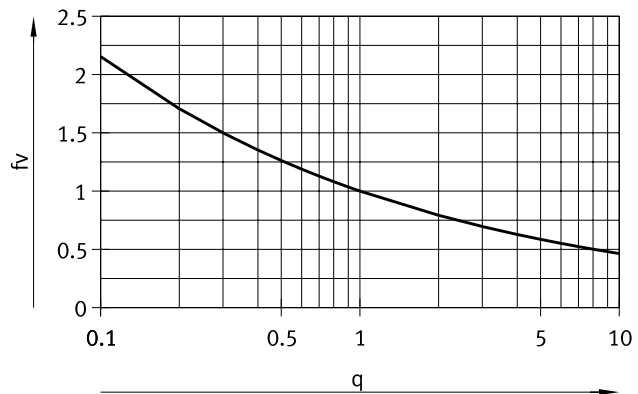


#### Note

Engineering tool

→ [www.festo.com/engineeringtools](http://www.festo.com/engineeringtools)

$f_v > 1.5$  are only theoretical comparative values.

### Calculation example

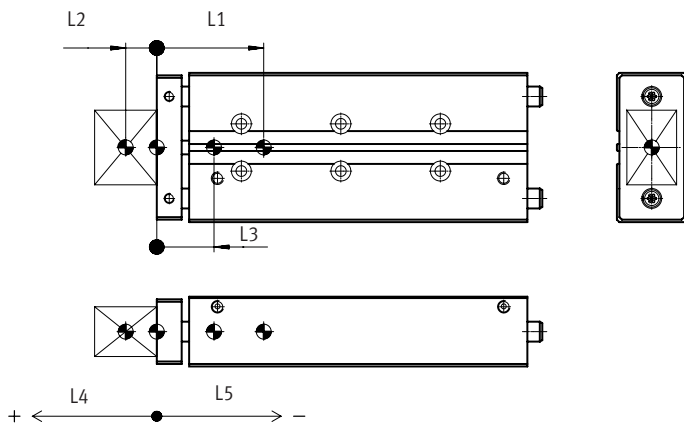

L1 = centre of gravity of the moving mass of the guided drive

L2 = centre of gravity of payload

L3 = centre of gravity of the entire moving mass

Length measurements should be provided with plus/minus signs as shown in the figure:

$L3 > 0$  = centre of gravity of the moving mass is on the payload side

$L3 < 0$  = centre of gravity of the moving mass is on the guide side

L4 = load side

L5 = guide side

Where:

- Guided drives: DFM-32-80-KF
- Stroke length:  $H = 80 \text{ mm}$
- Centre of gravity of payload:  $L_{\text{Load}} = 35 \text{ mm}$
- Payload:  $m_{\text{Load}} = 10 \text{ kgm}$
- Acceleration:  $a_x = 2 \text{ m/s}^2$ ,  $a_y = a_z = 0 \text{ m/s}^2$

To be determined:

- Loads  $F_{y_{\text{dyn}}}/F_{z_{\text{dyn}}}$  and  $M_{x_{\text{dyn}}}/M_{y_{\text{dyn}}}/M_{z_{\text{dyn}}}$
- Functional operation with combined load
- Expected service life

## Datasheet

## Calculation example

Solution:

Moving mass:

 $m_b$  = moving mass of the guided drive $m_{Load}$  = payload

$$m_{b\_total} = m_b + m_{Load}$$

From the table → page 11

$$m_b = 1.173 \text{ kg}$$

$$m_{b\_total} = 1.173 \text{ kg} + 10 \text{ kg} = 11.173 \text{ kg}$$

$$L_{b\_total} = \frac{L_1 \cdot m_1 + L_2 \cdot m_2}{m_{b\_total}}$$

$$L_{b\_total} = \frac{(+35 \text{ mm}) \cdot 10 \text{ kg} + (-84.7 \text{ mm}) \cdot 1.173 \text{ kg}}{11.173 \text{ kg}} = 25.6 \text{ mm}$$

 $L_b$  = centre of gravity of the moving mass of the guided drive $m_b$  = moving mass of the guided drive $L_{Load}$  = centre of gravity of payload $m_{Load}$  = payload

Length measurements should be provided with plus/minus signs as shown in the figure:

 $L_{b\_total} > 0$  = Centre of gravity of the moving mass is on the payload side $L_{b\_total} < 0$  = Centre of gravity of the moving mass is on the guide sideLoads  $F_{y\_dyn}/F_{z\_dyn}$  and  $M_{x\_dyn}/M_{y\_dyn}/M_{z\_dyn}$ 

$$F_{y\_dyn} = m_{b\_total} \times a_y = 11.173 \text{ kg} \times 0 \text{ m/s}^2 = 0 \text{ N}$$

$$F_{z\_dyn} = m_{b\_total} \times (g + a_z) = 11.173 \text{ kg} \times (9.81 \text{ m/s}^2 + 0 \text{ m/s}^2) = 110 \text{ N}$$

From the table → page 20

Dimension X = 56.5 mm

$$M_{y\_dyn} = F_{z\_dyn} \times (\text{dimension X} + \text{stroke} + L_{b\_total}) = 110 \text{ N} \times (56.5 \text{ mm} + 80 \text{ mm} + 25.6 \text{ mm}) = 17.8 \text{ Nm}$$

$$M_{z\_dyn} = F_{y\_dyn} \times (\text{dimension X} + \text{stroke} + L_{b\_total}) = 0 \text{ N} \times (56.5 \text{ mm} + 80 \text{ mm} + 25.6 \text{ mm}) = 0 \text{ Nm}$$

Functional operation with combined load

Max. values from table → page 22

$$F_{y\_max} = 1130 \text{ N}$$

$$F_{z\_max} = 1130 \text{ N}$$

$$M_{x\_max} = 44.09 \text{ Nm}$$

$$M_{y\_max} = 28.83 \text{ Nm}$$

$$M_{z\_max} = 28.83 \text{ Nm}$$

$$F = \frac{|F_{y\_max}|}{F_{y\_max}} + \frac{|F_{z\_max}|}{F_{z\_max}} + \frac{|M_{x\_max}|}{M_{x\_max}} + \frac{|M_{y\_max}|}{M_{y\_max}} + \frac{|M_{z\_max}|}{M_{z\_max}}$$

$$F = \frac{0 \text{ N}}{1130 \text{ N}} + \frac{110 \text{ N}}{1130 \text{ N}} + \frac{0 \text{ Nm}}{44.09 \text{ Nm}} + \frac{17.8 \text{ Nm}}{28.83 \text{ Nm}} + \frac{0 \text{ Nm}}{28.83 \text{ Nm}} = 0.72 \leq 1$$


$$L = \frac{L_1}{F} = \frac{10000 \text{ km}}{0.72} = 27000 \text{ km}$$

 $L_1$  = reference service life

Datasheet

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

Ø 6, 10 mm

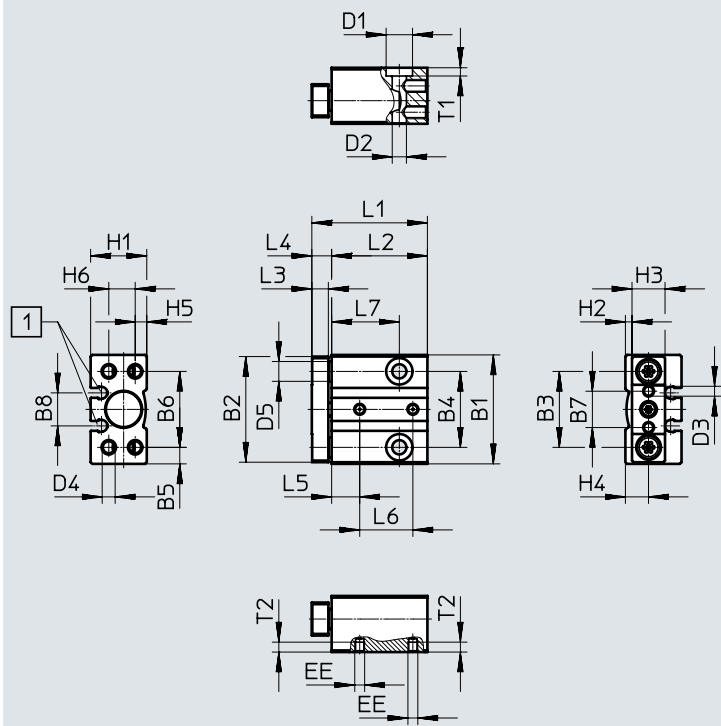

[1] Mounting slot for proximity switch  
SMT-10G

## Datasheet

| ∅<br>[mm] | B1 | B2 | B3   | B4   | B5  | B6   | B7 | B8  | D1<br>∅ | D2<br>∅ |
|-----------|----|----|------|------|-----|------|----|-----|---------|---------|
| 6         | 29 | 28 | 20.5 | 20.5 | 4.3 | 20.5 | 9  | 9.7 | 6.2     | 3.3     |
| 10        | 33 | 32 | 23   | 23   | 5   | 23   | 11 | 10  | 8       | 4.3     |

| ∅<br>[mm] | D3   | D4 | D5<br>∅<br>h8 | EE | H1   | H2  | H3 | H4  | H5  | H6 |
|-----------|------|----|---------------|----|------|-----|----|-----|-----|----|
| 6         | M2.5 | M3 | 5             | M3 | 14.5 | 1.8 | 9  | 6.3 | 3   | 6  |
| 10        | M3   | M4 | 6             | M3 | 17   | 2   | 10 | 7   | 3.5 | 8  |


| ∅<br>[mm] | Stroke<br>[mm] | L1 | L2   | L3  | L4  | L5  | L6   | L7   | T1  | T2 |
|-----------|----------------|----|------|-----|-----|-----|------|------|-----|----|
| 6         | 5              | 28 | 23.5 | 3.5 | 4.5 | 7   | 12   | 14   | 3   | 3  |
|           | 10             | 33 | 28.5 |     |     |     | 17   | 19   |     |    |
|           | 15             | 38 | 33.5 |     |     |     | 22   | 24   |     |    |
|           | 20             | 43 | 38.5 |     |     |     | 27   | 29   |     |    |
| 10        | 5              | 30 | 24   | 5   | 6   | 8.5 | 11.1 | 15.5 | 2.5 | 3  |
|           | 10             | 35 | 29   |     |     |     | 16.1 | 20.5 |     |    |
|           | 15             | 40 | 34   |     |     |     | 21.1 | 25.5 |     |    |
|           | 20             | 45 | 39   |     |     |     | 26.1 | 30.5 |     |    |

# Datasheet

## Dimensions

Ø 12 ... 16 mm

Download CAD data → [www.festo.com](http://www.festo.com)

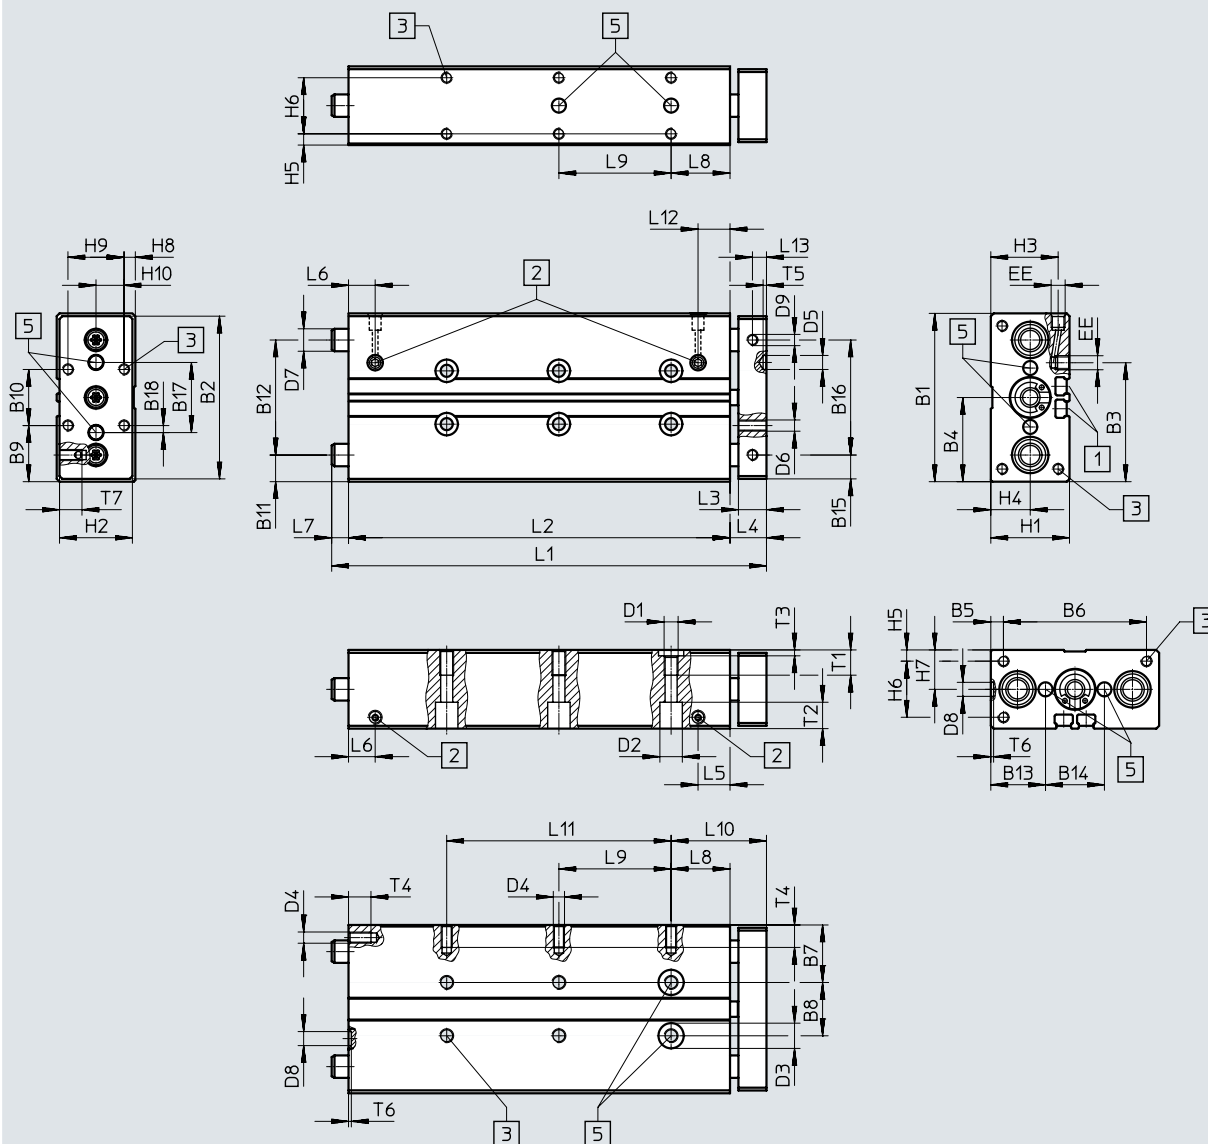

[1] Mounting slot for proximity switch SME/SMT-8

[2] Compressed air connection can be on the side or on top

[3] Mounting thread

[5] Tolerance between the centring holes ± 0.02 mm

## Note

If the guide rods project beyond the housing when the unit is in its retracted end position (→ dimension L7), a recess must be provided in the mounting surface if the unit is to be mounted on the end face so that the guide rods can move freely.

## Datasheet

| ∅<br>[mm] | B1 | B2 | B3   | B4   | B5  | B6 | B7   | B8 | B9   | B10 | B11  | B12 | B13  | B14  | B15 | B16 | B17 | B18 | D1 | D2<br>∅ |
|-----------|----|----|------|------|-----|----|------|----|------|-----|------|-----|------|------|-----|-----|-----|-----|----|---------|
| 12        | 60 | 58 | 42.4 | 30   | 4.5 | 51 | 20.5 | 19 | 20   | 20  | 9.5  | 41  | 19.5 | 21   | 8.5 | 41  | 25  | 2.5 | M5 | 8       |
| 16        | 67 | 65 | 45.9 | 33.5 | 4.5 | 58 | 22   | 23 | 23.5 | 20  | 10.5 | 46  | 21.3 | 24.4 | –   | –   | 28  | 4   | M5 | 7.5     |

| ∅<br>[mm] | D3<br>∅<br>H8 | D4 | D5<br>∅<br>H8 | D6 | D7<br>∅          |                  | D8<br>∅<br>H8 | D9 | EE | H1 | H2 | H3   | H4 | H5 | H6 | H7 | H8  | H9 | H10 |
|-----------|---------------|----|---------------|----|------------------|------------------|---------------|----|----|----|----|------|----|----|----|----|-----|----|-----|
|           |               |    |               |    | GF               | KF               |               |    |    |    |    |      |    |    |    |    |     |    |     |
| 12        | 9             | M4 | 5             | M4 | 10 <sub>H8</sub> | 8 <sub>H7</sub>  | 5             | M4 | M5 | 28 | 26 | 24   | 14 | 4  | 20 | 14 | 4   | 20 | 10  |
| 16        | 9             | M5 | 5             | M5 | 12 <sub>H8</sub> | 10 <sub>H7</sub> | 5             | –  | M5 | 32 | 30 | 26.5 | 16 | 4  | 24 | 16 | 7.4 | 20 | 10  |

| ∅<br>[mm] | Stroke<br>[mm] | L1  | L2  | L3 | L4 | L5   | L6   | L7 | L8 | L9 | L10 |
|-----------|----------------|-----|-----|----|----|------|------|----|----|----|-----|
| 12        | 10             | 59  | 46  | 10 | 13 | 11.4 | 9.5  | –  | 21 | –  | 34  |
|           | 20             | 69  | 56  |    |    |      |      | –  |    | –  |     |
|           | 25             | 74  | 61  |    |    |      |      | –  |    | 20 |     |
|           | 30             | 79  | 66  |    |    |      |      | –  |    | 20 |     |
|           | 40             | 95  | 76  |    |    |      |      | 6  |    | 20 |     |
|           | 50             | 105 | 86  |    |    |      |      | 6  |    | 40 |     |
|           | 80             | 135 | 116 |    |    |      |      | 6  |    | 40 |     |
|           | 100            | 155 | 136 |    |    |      |      | 6  |    | 40 |     |
| 16        | 10             | 60  | 48  | 10 | 12 | 11.9 | 10.6 | –  | 22 | –  | 34  |
|           | 20             | 70  | 58  |    |    |      |      | –  |    | –  |     |
|           | 25             | 75  | 63  |    |    |      |      | –  |    | 20 |     |
|           | 30             | 80  | 68  |    |    |      |      | –  |    | 20 |     |
|           | 40             | 107 | 78  |    |    |      |      | 17 |    | 20 |     |
|           | 50             | 117 | 88  |    |    |      |      | 17 |    | 40 |     |
|           | 80             | 147 | 118 |    |    |      |      | 17 |    | 40 |     |
|           | 100            | 167 | 138 |    |    |      |      | 17 |    | 40 |     |


| ∅<br>[mm] | Stroke<br>[mm] | L11 | L12  | L13 | T1 | T2  | T3  | T4 | T5  | T6 | T7 |
|-----------|----------------|-----|------|-----|----|-----|-----|----|-----|----|----|
| 12        | 10             | –   | 11.4 | 5   | 9  | 9.4 | 2.1 | 8  | 1.2 | 1  | 8  |
|           | 20             | –   |      |     |    |     |     |    |     |    |    |
|           | 25             | –   |      |     |    |     |     |    |     |    |    |
|           | 30             | –   |      |     |    |     |     |    |     |    |    |
|           | 40             | –   |      |     |    |     |     |    |     |    |    |
|           | 50             | –   |      |     |    |     |     |    |     |    |    |
|           | 80             | –   |      |     |    |     |     |    |     |    |    |
|           | 100            | 80  |      |     |    |     |     |    |     |    |    |
| 16        | 10             | –   | 11.9 | –   | 9  | 4.6 | 2.1 | 10 | 1.2 | 1  | –  |
|           | 20             | –   |      |     |    |     |     |    |     |    |    |
|           | 25             | –   |      |     |    |     |     |    |     |    |    |
|           | 30             | –   |      |     |    |     |     |    |     |    |    |
|           | 40             | –   |      |     |    |     |     |    |     |    |    |
|           | 50             | –   |      |     |    |     |     |    |     |    |    |
|           | 80             | –   |      |     |    |     |     |    |     |    |    |
|           | 100            | 80  |      |     |    |     |     |    |     |    |    |

# Datasheet

## Dimensions

Ø 20 ... 25 mm

Download CAD data → [www.festo.com](http://www.festo.com)

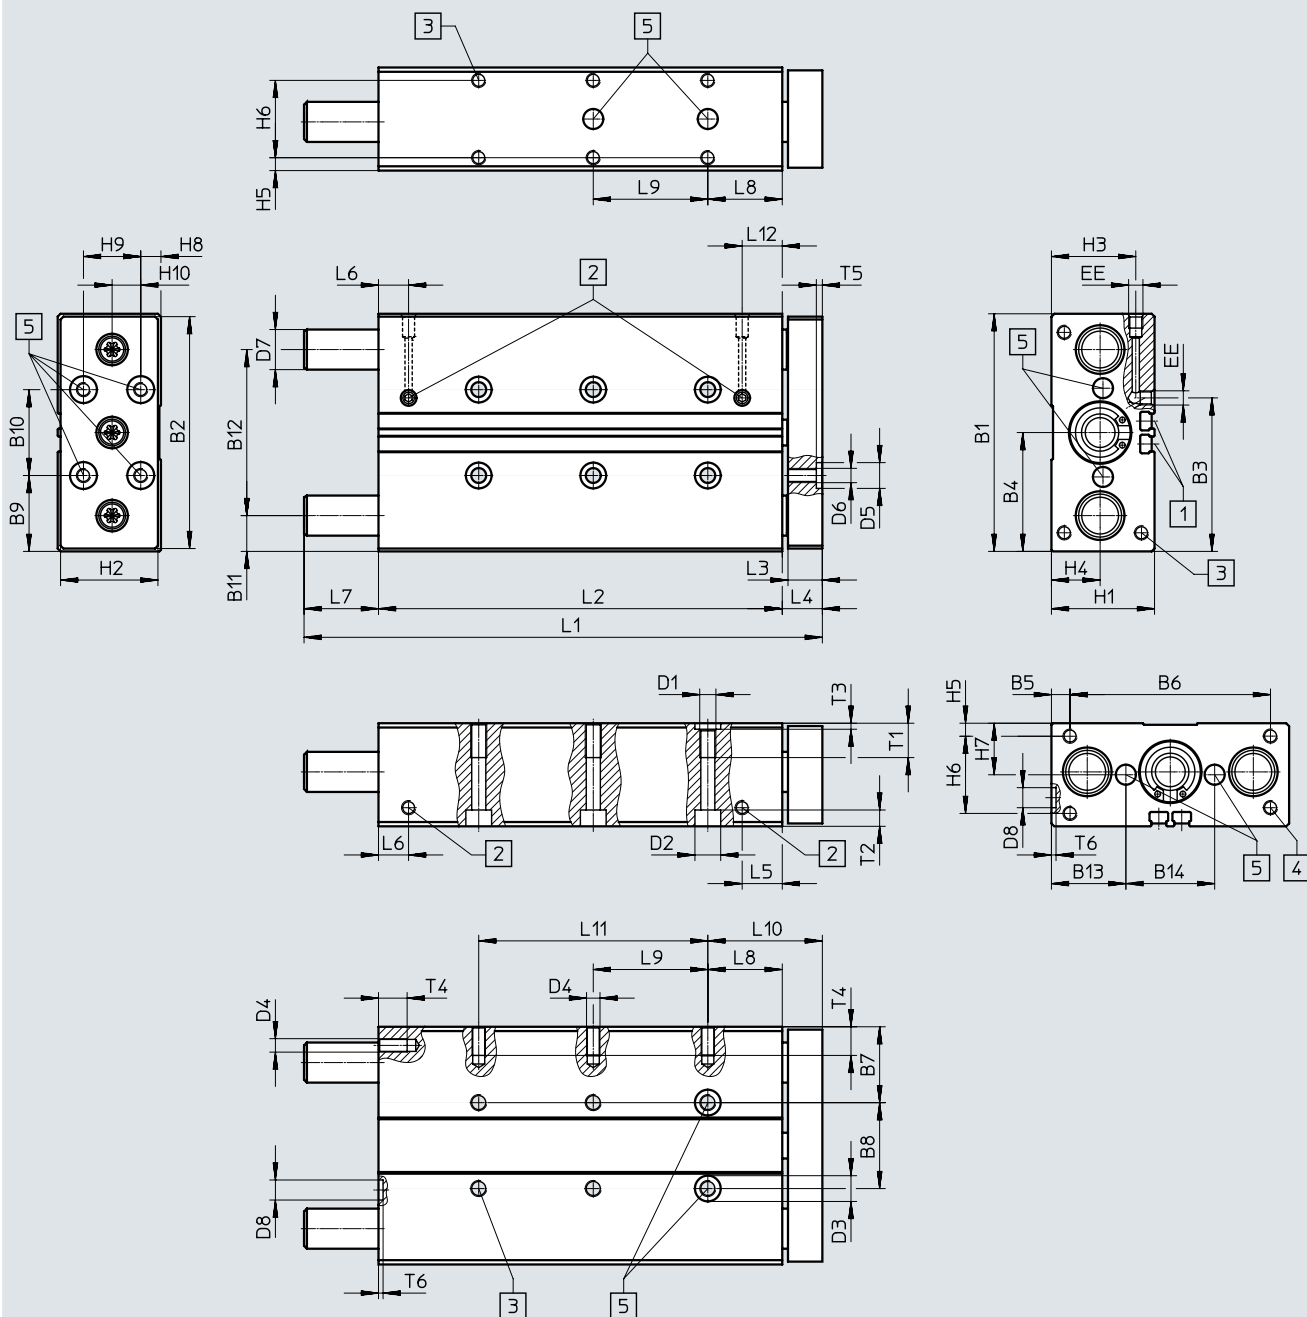

[1] Mounting slot for proximity switch SME-/SMT-8

[2] Compressed air connection can be on the side or on top

[3] Mounting thread  
[4] Mounting thread (not with Ø 20)

[5] Tolerance between the centring holes  $\pm 0.02$  mm

## Note

If the guide rods project beyond the housing when the unit is in its retracted end position (→ dimension L7), a recess must be provided in the mounting surface if the unit is to be mounted on the end face so that the guide rods can move freely.

## Datasheet

| ∅<br>[mm] | B1 | B2 | B3   | B4   | B5   | B6 | B7   | B8 | B9   | B10 | B11  | B12 | B13 | B14 | D1 | D2<br>∅ | D3<br>∅<br>H8 | D4 |
|-----------|----|----|------|------|------|----|------|----|------|-----|------|-----|-----|-----|----|---------|---------------|----|
| 20        | 83 | 81 | 53.6 | 41.5 | 6.5  | 70 | 26.5 | 30 | 26.5 | 30  | 12.5 | 58  | 26  | 31  | M6 | 9       | 9             | M5 |
| 25        | 95 | 93 | 70   | 47.5 | 15.5 | 64 | 30   | 35 | 27.5 | 40  | 13.5 | 68  | 29  | 37  | M6 | 9       | 9             | M6 |

| ∅<br>[mm] | D5<br>∅<br>H8 | D6 | D7<br>∅          |                  | D8<br>∅<br>H8 | EE   | H1 | H2 | H3   | H4 | H5  | H6 | H7 | H8 | H9 | H10 |
|-----------|---------------|----|------------------|------------------|---------------|------|----|----|------|----|-----|----|----|----|----|-----|
|           |               |    | GF               | KF               |               |      |    |    |      |    |     |    |    |    |    |     |
| 20        | 9             | M5 | 14 <sub>h8</sub> | 12 <sub>h7</sub> | 7             | M5   | 36 | 34 | 29.5 | 17 | 4.5 | 27 | 18 | 7  | 20 | 10  |
| 25        | 9             | M6 | 16 <sub>h8</sub> | 14 <sub>h7</sub> | 7             | G1/8 | 44 | 42 | 34.8 | 19 | 4.5 | 35 | 22 | 12 | 20 | 10  |

| ∅<br>[mm] | Stroke<br>[mm] | L1  | L2    | L3 | L4 | L5   | L6   | L7   | L8 | L9 |
|-----------|----------------|-----|-------|----|----|------|------|------|----|----|
| 20        | 20             | 75  | 61    | 12 | 14 | 14   | 10.5 | –    | 26 | –  |
|           | 25             | 80  | 66    |    |    |      |      | –    |    | 20 |
|           | 30             | 85  | 71    |    |    |      |      | –    |    | 20 |
|           | 40             | 121 | 81    |    |    |      |      | 26   |    | 20 |
|           | 50             | 131 | 91    |    |    |      |      | 26   |    | 40 |
|           | 80             | 161 | 121   |    |    |      |      | 26   |    | 40 |
|           | 100            | 181 | 141   |    |    |      |      | 26   |    | 40 |
|           | 100            | 181 | 141   |    |    |      |      | 26   |    | 40 |
| 25        | 20             | 93  | 65.6  | 12 | 14 | 17.5 | 9.5  | 13.4 | 26 | –  |
|           | 25             | 98  | 70.6  |    |    |      |      | 13.4 |    | 20 |
|           | 30             | 103 | 75.6  |    |    |      |      | 13.4 |    | 20 |
|           | 40             | 123 | 85.6  |    |    |      |      | 23.4 |    | 20 |
|           | 50             | 133 | 95.6  |    |    |      |      | 23.4 |    | 40 |
|           | 80             | 163 | 125.6 |    |    |      |      | 23.4 |    | 40 |
|           | 100            | 183 | 145.6 |    |    |      |      | 23.4 |    | 40 |
|           | 100            | 183 | 145.6 |    |    |      |      | 23.4 |    | 40 |

| ∅<br>[mm] | Stroke<br>[mm] | L10 | L11 | L12 | T1 | T2  | T3  | T4 | T5  | T6  |
|-----------|----------------|-----|-----|-----|----|-----|-----|----|-----|-----|
| 20        | 20             | 40  | –   | 14  | 12 | 5.7 | 2.1 | 10 | 2.1 | 1.6 |
|           | 25             |     | –   |     |    |     |     |    |     |     |
|           | 30             |     | –   |     |    |     |     |    |     |     |
|           | 40             |     | –   |     |    |     |     |    |     |     |
|           | 50             |     | –   |     |    |     |     |    |     |     |
|           | 80             |     | –   |     |    |     |     |    |     |     |
|           | 100            |     | 80  |     |    |     |     |    |     |     |
| 25        | 20             | 40  | –   | 15  | 14 | 5.7 | 2.1 | 12 | 2.1 | 1.6 |
|           | 25             |     | –   |     |    |     |     |    |     |     |
|           | 30             |     | –   |     |    |     |     |    |     |     |
|           | 40             |     | –   |     |    |     |     |    |     |     |
|           | 50             |     | –   |     |    |     |     |    |     |     |
|           | 80             |     | –   |     |    |     |     |    |     |     |
|           | 100            |     | 80  |     |    |     |     |    |     |     |


– Note: This product conforms to ISO 1179-1 and ISO 228-1.

# Datasheet

## Dimensions

Ø 32 ... 63 mm

Download CAD data → [www.festo.com](http://www.festo.com)

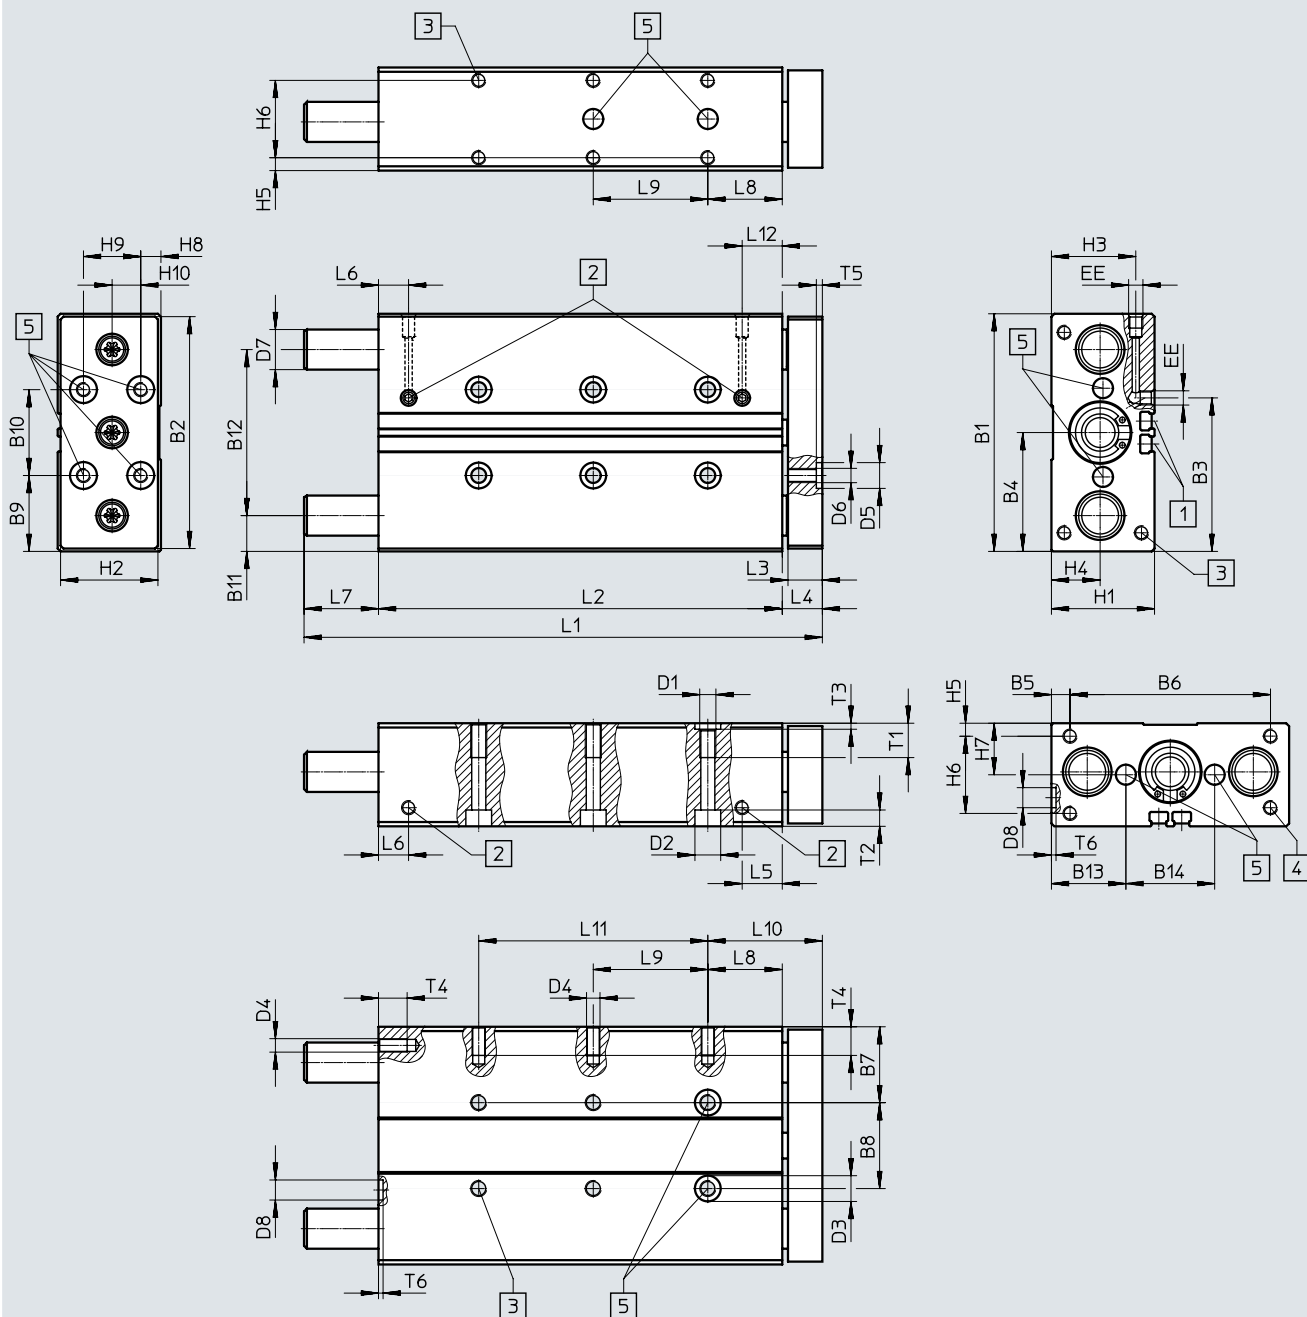

[1] Mounting slot for proximity switch SME-/SMT-8

[2] Compressed air connection can be on the side or on top

[3] Mounting thread

[4] Mounting thread

[5] Tolerance between the centring holes  $\pm 0.02$  mm

## Note

As the guide rods project beyond the housing when the unit is in its retracted end position (→ dimension L7), a recess must be provided in the mounting surface if the unit is to be mounted on the end face so that the guide rods can move freely.

## Datasheet

| ∅<br>[mm] | B1  | B2  | B3    | B4 | B5 | B6  | B7   | B8 | B9 | B10 | B11  | B12 | B13  | B14 | D1  | D2<br>∅ | D3<br>∅<br>H8 |
|-----------|-----|-----|-------|----|----|-----|------|----|----|-----|------|-----|------|-----|-----|---------|---------------|
| 32        | 110 | 108 | 81    | 55 | 20 | 70  | 33.5 | 43 | 35 | 40  | 16   | 78  | 32.5 | 45  | M8  | 11      | 12            |
| 40        | 120 | 118 | 94    | 60 | 15 | 90  | 34.5 | 51 | 35 | 50  | 16   | 88  | 32.5 | 55  | M8  | 11      | 12            |
| 50        | 148 | 146 | 116.5 | 74 | 19 | 110 | 42   | 64 | 44 | 60  | 19   | 110 | 40   | 68  | M8  | 11      | 12            |
| 63        | 162 | 160 | 139   | 81 | 9  | 144 | 41   | 80 | 41 | 80  | 18.5 | 125 | 39.5 | 83  | M10 | 15      | 12            |

| ∅<br>[mm] | D4  | D5<br>∅<br>H8 | D6 | D7<br>∅<br>GF   KF |                  | D8<br>∅<br>H8 | EE   | H1 | H2 | H3   | H4   | H5 | H6 | H7   | H8  | H9 | H10 |
|-----------|-----|---------------|----|--------------------|------------------|---------------|------|----|----|------|------|----|----|------|-----|----|-----|
| 32        | M6  | 9             | M6 | 20 <sub>H8</sub>   | 16 <sub>H7</sub> | 9             | G1/8 | 49 | 47 | 38.5 | 22   | 6  | 37 | 24.5 | 8.5 | 30 | 15  |
| 40        | M8  | 9             | M6 | 20 <sub>H8</sub>   | 16 <sub>H7</sub> | 9             | G1/8 | 54 | 52 | 40.5 | 24   | 6  | 42 | 27   | 10  | 30 | 15  |
| 50        | M8  | 12            | M8 | 25 <sub>H8</sub>   | 20 <sub>H7</sub> | 12            | G1/4 | 64 | 62 | 50.5 | 29.5 | 7  | 50 | 32   | 12  | 40 | 20  |
| 63        | M10 | 12            | M8 | 25 <sub>H8</sub>   | 20 <sub>H7</sub> | 12            | G1/4 | 78 | 76 | 55   | 32   | 9  | 60 | 39   | 19  | 40 | 20  |

| ∅<br>[mm] | Stroke<br>[mm] | L1  | L2  | L3 | L4 | L5   | L6   | L7 | L8 | L9 | L10 | L11 | L12  | T1 | T2  | T3  | T4 | T5  | T6  |
|-----------|----------------|-----|-----|----|----|------|------|----|----|----|-----|-----|------|----|-----|-----|----|-----|-----|
| 32        | 20             | 101 | 68  | 14 | 16 | 17   | 12   | 17 | 29 | —  | 45  | —   | 17   | 15 | 6.8 | 2.6 | 12 | 2.1 | 2.1 |
|           | 25             | 106 | 73  |    |    |      |      | 17 |    | 20 |     | —   |      |    |     |     |    |     |     |
|           | 30             | 111 | 78  |    |    |      |      | 17 |    | 20 |     | —   |      |    |     |     |    |     |     |
|           | 40             | 121 | 88  |    |    |      |      | 17 |    | 20 |     | —   |      |    |     |     |    |     |     |
|           | 50             | 131 | 98  |    |    |      |      | 17 |    | 40 |     | —   |      |    |     |     |    |     |     |
|           | 80             | 179 | 128 |    |    |      |      | 35 |    | 40 |     | —   |      |    |     |     |    |     |     |
|           | 100            | 199 | 148 |    |    |      |      | 35 |    | 40 |     | 80  |      |    |     |     |    |     |     |
|           | 125            | 244 | 173 |    |    |      |      | 55 |    | 40 |     | 80  |      |    |     |     |    |     |     |
|           | 160            | 279 | 208 |    |    |      |      | 55 |    | 40 |     | 120 |      |    |     |     |    |     |     |
|           | 200            | 319 | 248 |    |    |      |      | 55 |    | 40 |     | 160 |      |    |     |     |    |     |     |
| 40        | 25             | 106 | 76  | 14 | 16 | 17.8 | 13.1 | 14 | 29 | 20 | 45  | —   | 17.8 | 15 | 6.8 | 2.6 | 16 | 2.1 | 2.1 |
|           | 50             | 131 | 101 |    |    |      |      | 14 |    | 40 |     | —   |      |    |     |     |    |     |     |
|           | 80             | 179 | 131 |    |    |      |      | 32 |    | 40 |     | —   |      |    |     |     |    |     |     |
|           | 100            | 199 | 151 |    |    |      |      | 32 |    | 40 |     | 80  |      |    |     |     |    |     |     |
|           | 125            | 244 | 176 |    |    |      |      | 52 |    | 40 |     | 80  |      |    |     |     |    |     |     |
|           | 160            | 279 | 211 |    |    |      |      | 52 |    | 40 |     | 120 |      |    |     |     |    |     |     |
|           | 200            | 319 | 251 |    |    |      |      | 52 |    | 40 |     | 160 |      |    |     |     |    |     |     |
| 50        | 25             | 118 | 77  | 16 | 18 | 17.8 | 14.2 | 23 | 32 | 20 | 50  | —   | 17.8 | 15 | 6.8 | 2.6 | 16 | 2.6 | 2.6 |
|           | 50             | 143 | 102 |    |    |      |      | 23 |    | 40 |     | —   |      |    |     |     |    |     |     |
|           | 80             | 194 | 132 |    |    |      |      | 44 |    | 40 |     | —   |      |    |     |     |    |     |     |
|           | 100            | 214 | 152 |    |    |      |      | 44 |    | 40 |     | 80  |      |    |     |     |    |     |     |
|           | 125            | 259 | 177 |    |    |      |      | 64 |    | 40 |     | 80  |      |    |     |     |    |     |     |
|           | 160            | 294 | 212 |    |    |      |      | 64 |    | 40 |     | 120 |      |    |     |     |    |     |     |
|           | 200            | 334 | 252 |    |    |      |      | 64 |    | 40 |     | 160 |      |    |     |     |    |     |     |
| 63        | 25             | 118 | 83  | 16 | 18 | 18.5 | 14.8 | 17 | 32 | 20 | 50  | —   | 18.5 | 20 | 9   | 2.6 | 20 | 2.6 | 2.6 |
|           | 50             | 143 | 108 |    |    |      |      | 17 |    | 40 |     | —   |      |    |     |     |    |     |     |
|           | 80             | 194 | 138 |    |    |      |      | 38 |    | 40 |     | 80  |      |    |     |     |    |     |     |
|           | 100            | 214 | 158 |    |    |      |      | 38 |    | 40 |     | 80  |      |    |     |     |    |     |     |
|           | 125            | 259 | 183 |    |    |      |      | 58 |    | 40 |     | 120 |      |    |     |     |    |     |     |
|           | 160            | 294 | 218 |    |    |      |      | 58 |    | 40 |     | 160 |      |    |     |     |    |     |     |
|           | 200            | 334 | 258 |    |    |      |      | 58 |    | 40 |     | 200 |      |    |     |     |    |     |     |


• Note: This product conforms to ISO 1179-1 and ISO 228-1.

# Datasheet

## Dimensions

Ø 80 ... 100 mm

Download CAD data → [www.festo.com](http://www.festo.com)

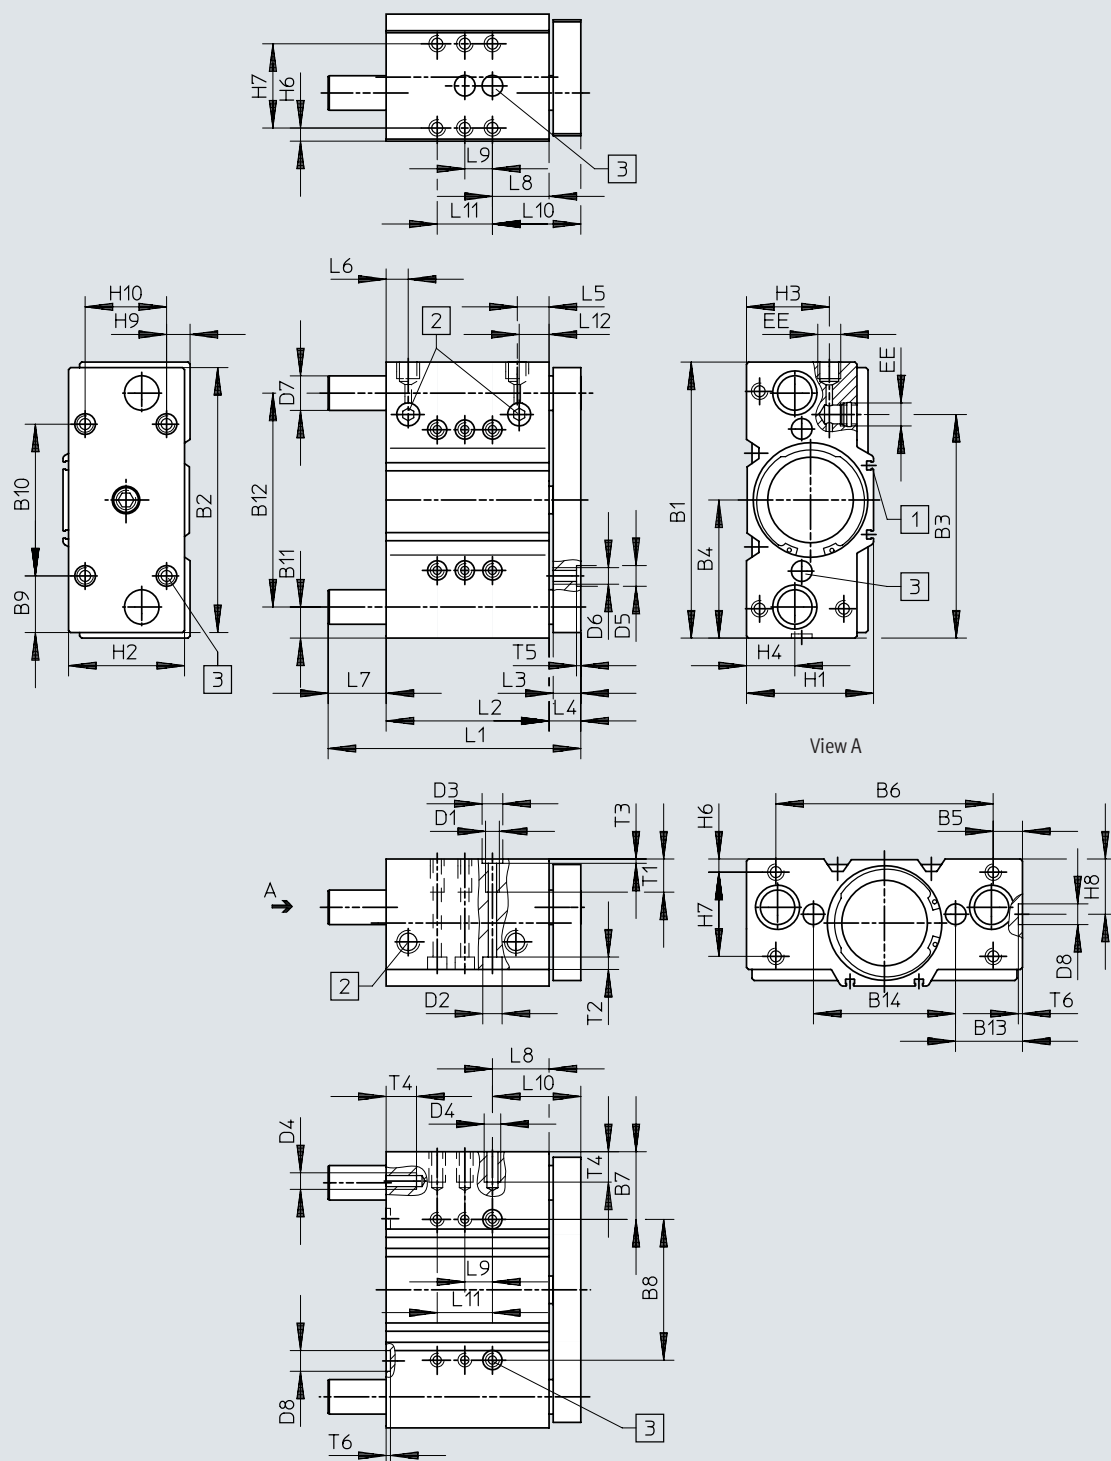

[1] Mounting slot for proximity switch SME-/SMT-8

[2] Compressed air connection can be on the side or on top

[3] Tolerance between the centring holes  $\pm 0.02$  mm

## Note

As the guide rods project beyond the housing when the unit is in its retracted end position (→ dimension L7), a recess must be provided in the mounting surface if the unit is to be mounted on the end face so that the guide rods can move freely.

## Datasheet

| ∅<br>[mm] | B1  | B2  | B3    | B4  | B5   | B6  | B7   | B8  | B9 | B10 | B11  | B12 | B13  | B14 | D1  | D2<br>∅ | D3<br>∅<br>H8 |
|-----------|-----|-----|-------|-----|------|-----|------|-----|----|-----|------|-----|------|-----|-----|---------|---------------|
| 80        | 200 | 192 | 162.5 | 100 | 21.5 | 157 | 48.5 | 103 | 41 | 110 | 22.5 | 155 | 48.5 | 103 | M10 | 15      | 12            |
| 100       | 240 | 232 | 201   | 120 | 21   | 198 | 54   | 132 | 56 | 120 | 26   | 188 | 57   | 126 | M12 | 18      | 15            |

| ∅<br>[mm] | D4  | D5<br>∅<br>H8 | D6  | D7<br>∅ |      | D8<br>∅<br>H8 | EE   | H1  | H2  | H3 | H4   | H6 | H7 | H8 | H9 | H10 |
|-----------|-----|---------------|-----|---------|------|---------------|------|-----|-----|----|------|----|----|----|----|-----|
|           |     |               |     | GF      | KF   |               |      |     |     |    |      |    |    |    |    |     |
| 80        | M10 | 12            | M10 | 30h8    | 25h6 | 12            | G3/8 | 92  | 84  | 61 | 35   | 9  | 62 | 40 | 16 | 60  |
| 100       | M12 | 15            | M12 | 35h8    | 30h6 | 15            | G3/8 | 112 | 104 | 66 | 39.5 | 10 | 68 | 44 | 16 | 80  |

| ∅<br>[mm] | Stroke<br>[mm] | L1  | L2  | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10<br>±0.1 | L11 | L12 | T1 | T2 | T3  | T4 | T5  | T6  |
|-----------|----------------|-----|-----|----|----|----|----|----|----|----|-------------|-----|-----|----|----|-----|----|-----|-----|
| 80        | 25             | 137 | 93  | 20 | 23 | 23 | 16 | 21 | 41 | 20 | 64          | –   | 23  | 20 | 9  | 2.6 | 20 | 2.6 | 2.6 |
|           | 50             | 183 | 118 |    |    |    |    | 42 |    | 40 |             | –   |     |    |    |     |    |     |     |
|           | 80             | 243 | 148 |    |    |    |    | 72 |    | 40 |             | –   |     |    |    |     |    |     |     |
|           | 100            | 263 | 168 |    |    |    |    | 72 |    | 40 |             | 80  |     |    |    |     |    |     |     |
|           | 125            | 288 | 193 |    |    |    |    | 72 |    | 40 |             | 80  |     |    |    |     |    |     |     |
|           | 160            | 323 | 228 |    |    |    |    | 72 |    | 40 |             | 120 |     |    |    |     |    |     |     |
|           | 200            | 363 | 268 |    |    |    |    | 72 |    | 40 |             | 160 |     |    |    |     |    |     |     |
|           |                |     |     |    |    |    |    |    |    |    |             |     |     |    |    |     |    |     |     |
| 100       | 25             | 150 | 109 | 20 | 23 | 29 | 20 | 18 | 13 | 40 | 36          | –   | 29  | 25 | 11 | 3.1 | 24 | 3.1 | 3.1 |
|           | 50             | 197 | 134 |    |    |    |    | 40 |    | 40 |             | 80  |     |    |    |     |    |     |     |
|           | 80             | 257 | 164 |    |    |    |    | 70 |    | 40 |             | 80  |     |    |    |     |    |     |     |
|           | 100            | 277 | 184 |    |    |    |    | 70 |    | 40 |             | 120 |     |    |    |     |    |     |     |
|           | 125            | 302 | 209 |    |    |    |    | 70 |    | 40 |             | 160 |     |    |    |     |    |     |     |
|           | 160            | 337 | 244 |    |    |    |    | 70 |    | 40 |             | 160 |     |    |    |     |    |     |     |
|           | 200            | 377 | 284 |    |    |    |    | 70 |    | 40 |             | 200 |     |    |    |     |    |     |     |
|           |                |     |     |    |    |    |    |    |    |    |             |     |     |    |    |     |    |     |     |

• Note: This product conforms to ISO 1179-1 and ISO 228-1.

## Datasheet

| Ordering data – Plain-bearing guide GF |         |                   |         |                   |          |                    |      |
|----------------------------------------|---------|-------------------|---------|-------------------|----------|--------------------|------|
|                                        |         | Part no.          | Type    |                   |          | Part no.           | Type |
| Stroke [mm]                            | Ø 6 mm  |                   | Ø 10 mm |                   | Ø 12 mm  |                    |      |
| 5                                      | 4149944 | DFM-6-5-P-A-GF    | 4154768 | DFM-10-5-P-A-GF   | –        |                    |      |
| 10                                     | 4149945 | DFM-6-10-P-A-GF   | 4154769 | DFM-10-10-P-A-GF  | 170824   | DFM-12-10-P-A-GF   |      |
| 15                                     | 4149946 | DFM-6-15-P-A-GF   | 4154770 | DFM-10-15-P-A-GF  | –        |                    |      |
| 20                                     | 4149947 | DFM-6-20-P-A-GF   | 4154799 | DFM-10-20-P-A-GF  | 170825   | DFM-12-20-P-A-GF   |      |
| 25                                     | –       |                   | –       |                   | 170826   | DFM-12-25-P-A-GF   |      |
| 30                                     |         |                   |         |                   | 170827   | DFM-12-30-P-A-GF   |      |
| 40                                     |         |                   |         |                   | 170828   | DFM-12-40-P-A-GF   |      |
| 50                                     |         |                   |         |                   | 170829   | DFM-12-50-P-A-GF   |      |
| 80                                     |         |                   |         |                   | 170830   | DFM-12-80-P-A-GF   |      |
| 100                                    |         |                   |         |                   | 170831   | DFM-12-100-P-A-GF  |      |
| Stroke [mm]                            | Ø 16 mm |                   | Ø 20 mm |                   | Ø 25 mm  |                    |      |
| 10                                     | 170832  | DFM-16-10-P-A-GF  | –       |                   | –        |                    |      |
| 20                                     | 170833  | DFM-16-20-P-A-GF  | 170840  | DFM-20-20-P-A-GF  | 170847   | DFM-25-20-P-A-GF   |      |
| 25                                     | 170834  | DFM-16-25-P-A-GF  | 170841  | DFM-20-25-P-A-GF  | 170848   | DFM-25-25-P-A-GF   |      |
| 30                                     | 170835  | DFM-16-30-P-A-GF  | 170842  | DFM-20-30-P-A-GF  | 170849   | DFM-25-30-P-A-GF   |      |
| 40                                     | 170836  | DFM-16-40-P-A-GF  | 170843  | DFM-20-40-P-A-GF  | 170850   | DFM-25-40-P-A-GF   |      |
| 50                                     | 170837  | DFM-16-50-P-A-GF  | 170844  | DFM-20-50-P-A-GF  | 170851   | DFM-25-50-P-A-GF   |      |
| 80                                     | 170838  | DFM-16-80-P-A-GF  | 170845  | DFM-20-80-P-A-GF  | 170852   | DFM-25-80-P-A-GF   |      |
| 100                                    | 170839  | DFM-16-100-P-A-GF | 170846  | DFM-20-100-P-A-GF | 170853   | DFM-25-100-P-A-GF  |      |
| Stroke [mm]                            | Ø 32 mm |                   | Ø 40 mm |                   | Ø 50 mm  |                    |      |
| 20                                     | 170854  | DFM-32-20-P-A-GF  | –       |                   | –        |                    |      |
| 25                                     | 170855  | DFM-32-25-P-A-GF  | 170864  | DFM-40-25-P-A-GF  | 170871   | DFM-50-25-P-A-GF   |      |
| 30                                     | 170856  | DFM-32-30-P-A-GF  | –       |                   | –        |                    |      |
| 40                                     | 170857  | DFM-32-40-P-A-GF  |         |                   |          |                    |      |
| 50                                     | 170858  | DFM-32-50-P-A-GF  | 170865  | DFM-40-50-P-A-GF  | 170872   | DFM-50-50-P-A-GF   |      |
| 80                                     | 170859  | DFM-32-80-P-A-GF  | 170866  | DFM-40-80-P-A-GF  | 170873   | DFM-50-80-P-A-GF   |      |
| 100                                    | 170860  | DFM-32-100-P-A-GF | 170867  | DFM-40-100-P-A-GF | 170874   | DFM-50-100-P-A-GF  |      |
| 125                                    | 170861  | DFM-32-125-P-A-GF | 170868  | DFM-40-125-P-A-GF | 170875   | DFM-50-125-P-A-GF  |      |
| 160                                    | 170862  | DFM-32-160-P-A-GF | 170869  | DFM-40-160-P-A-GF | 170876   | DFM-50-160-P-A-GF  |      |
| 200                                    | 170863  | DFM-32-200-P-A-GF | 170870  | DFM-40-200-P-A-GF | 170877   | DFM-50-200-P-A-GF  |      |
| Stroke [mm]                            | Ø 63 mm |                   | Ø 80 mm |                   | Ø 100 mm |                    |      |
| 25                                     | 170878  | DFM-63-25-P-A-GF  | 170885  | DFM-80-25-P-A-GF  | 170892   | DFM-100-25-P-A-GF  |      |
| 50                                     | 170879  | DFM-63-50-P-A-GF  | 170886  | DFM-80-50-P-A-GF  | 170893   | DFM-100-50-P-A-GF  |      |
| 80                                     | 170880  | DFM-63-80-P-A-GF  | 170887  | DFM-80-80-P-A-GF  | 170894   | DFM-100-80-P-A-GF  |      |
| 100                                    | 170881  | DFM-63-100-P-A-GF | 170888  | DFM-80-100-P-A-GF | 170895   | DFM-100-100-P-A-GF |      |
| 125                                    | 170882  | DFM-63-125-P-A-GF | 170889  | DFM-80-125-P-A-GF | 170896   | DFM-100-125-P-A-GF |      |
| 160                                    | 170883  | DFM-63-160-P-A-GF | 170890  | DFM-80-160-P-A-GF | 170897   | DFM-100-160-P-A-GF |      |
| 200                                    | 170884  | DFM-63-200-P-A-GF | 170891  | DFM-80-200-P-A-GF | 170898   | DFM-100-200-P-A-GF |      |

## Datasheet

| Ordering data – Plain-bearing guide GF and variant F1A (recommended for production facilities for manufacturing lithium-ion batteries) |                |                       |  |                |                       |
|----------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------|--|----------------|-----------------------|
|                                                                                                                                        | Part no.       | Type                  |  | Part no.       | Type                  |
| <b>Stroke [mm]</b>                                                                                                                     | <b>Ø 12 mm</b> |                       |  | <b>Ø 16 mm</b> |                       |
| 10                                                                                                                                     | 8118623        | DFM-12-10-P-A-GF-F1A  |  | 8118822        | DFM-16-10-P-A-GF-F1A  |
| 20                                                                                                                                     | 8118624        | DFM-12-20-P-A-GF-F1A  |  | 8118823        | DFM-16-20-P-A-GF-F1A  |
| 25                                                                                                                                     | 8118625        | DFM-12-25-P-A-GF-F1A  |  | 8118824        | DFM-16-25-P-A-GF-F1A  |
| 30                                                                                                                                     | 8118626        | DFM-12-30-P-A-GF-F1A  |  | 8118825        | DFM-16-30-P-A-GF-F1A  |
| 40                                                                                                                                     | 8118627        | DFM-12-40-P-A-GF-F1A  |  | 8118826        | DFM-16-40-P-A-GF-F1A  |
| 50                                                                                                                                     | 8118628        | DFM-12-50-P-A-GF-F1A  |  | 8118827        | DFM-16-50-P-A-GF-F1A  |
| 80                                                                                                                                     | 8118629        | DFM-12-80-P-A-GF-F1A  |  | 8118828        | DFM-16-80-P-A-GF-F1A  |
| 100                                                                                                                                    | 8118630        | DFM-12-100-P-A-GF-F1A |  | 8118829        | DFM-16-100-P-A-GF-F1A |
| <b>Stroke [mm]</b>                                                                                                                     | <b>Ø 20 mm</b> |                       |  | <b>Ø 25 mm</b> |                       |
| 20                                                                                                                                     | 8118843        | DFM-20-20-P-A-GF-F1A  |  | 8118862        | DFM-25-20-P-A-GF-F1A  |
| 25                                                                                                                                     | 8118844        | DFM-20-25-P-A-GF-F1A  |  | 8118863        | DFM-25-25-P-A-GF-F1A  |
| 30                                                                                                                                     | 8118845        | DFM-20-30-P-A-GF-F1A  |  | 8118864        | DFM-25-30-P-A-GF-F1A  |
| 40                                                                                                                                     | 8118846        | DFM-20-40-P-A-GF-F1A  |  | 8118865        | DFM-25-40-P-A-GF-F1A  |
| 50                                                                                                                                     | 8118847        | DFM-20-50-P-A-GF-F1A  |  | 8118866        | DFM-25-50-P-A-GF-F1A  |
| 80                                                                                                                                     | 8118848        | DFM-20-80-P-A-GF-F1A  |  | 8118867        | DFM-25-80-P-A-GF-F1A  |
| 100                                                                                                                                    | 8118849        | DFM-20-100-P-A-GF-F1A |  | 8118868        | DFM-25-100-P-A-GF-F1A |
| <b>Stroke [mm]</b>                                                                                                                     | <b>Ø 32 mm</b> |                       |  | <b>Ø 40 mm</b> |                       |
| 20                                                                                                                                     | 8118881        | DFM-32-20-P-A-GF-F1A  |  | 8118907        | DFM-40-20-P-A-GF-F1A  |
| 25                                                                                                                                     | 8118882        | DFM-32-25-P-A-GF-F1A  |  | 8118908        | DFM-40-25-P-A-GF-F1A  |
| 30                                                                                                                                     | 8118883        | DFM-32-30-P-A-GF-F1A  |  | 8118909        | DFM-40-30-P-A-GF-F1A  |
| 40                                                                                                                                     | 8118884        | DFM-32-40-P-A-GF-F1A  |  | 8118910        | DFM-40-40-P-A-GF-F1A  |
| 50                                                                                                                                     | 8118885        | DFM-32-50-P-A-GF-F1A  |  | 8118911        | DFM-40-50-P-A-GF-F1A  |
| 80                                                                                                                                     | 8118886        | DFM-32-80-P-A-GF-F1A  |  | 8118912        | DFM-40-80-P-A-GF-F1A  |
| 100                                                                                                                                    | 8118887        | DFM-32-100-P-A-GF-F1A |  | 8118913        | DFM-40-100-P-A-GF-F1A |
| 125                                                                                                                                    | 8118888        | DFM-32-125-P-A-GF-F1A |  | –              |                       |
| 160                                                                                                                                    | 8118889        | DFM-32-160-P-A-GF-F1A |  |                |                       |
| 200                                                                                                                                    | 8118890        | DFM-32-200-P-A-GF-F1A |  |                |                       |
| <b>Stroke [mm]</b>                                                                                                                     | <b>Ø 50 mm</b> |                       |  | <b>Ø 63 mm</b> |                       |
| 25                                                                                                                                     | 8118927        | DFM-50-25-P-A-GF-F1A  |  | 8118947        | DFM-63-25-P-A-GF-F1A  |
| 50                                                                                                                                     | 8118928        | DFM-50-50-P-A-GF-F1A  |  | 8118948        | DFM-63-50-P-A-GF-F1A  |
| 80                                                                                                                                     | 8118929        | DFM-50-80-P-A-GF-F1A  |  | 8118949        | DFM-63-80-P-A-GF-F1A  |
| 100                                                                                                                                    | 8118930        | DFM-50-100-P-A-GF-F1A |  | 8118950        | DFM-63-100-P-A-GF-F1A |
| 125                                                                                                                                    | 8118931        | DFM-50-125-P-A-GF-F1A |  | 8118951        | DFM-63-125-P-A-GF-F1A |
| 160                                                                                                                                    | 8118932        | DFM-50-160-P-A-GF-F1A |  | 8118952        | DFM-63-160-P-A-GF-F1A |
| 200                                                                                                                                    | 8118933        | DFM-50-200-P-A-GF-F1A |  | 8118953        | DFM-63-200-P-A-GF-F1A |


## Datasheet

| Ordering data – Recirculating ball bearing guide KF |        |                    |          |  |  |          |                   |        |                   |  |  |
|-----------------------------------------------------|--------|--------------------|----------|--|--|----------|-------------------|--------|-------------------|--|--|
| Part no.                                            |        |                    | Type     |  |  | Part no. |                   |        | Type              |  |  |
| Stroke [mm]                                         |        |                    | Ø 12 mm  |  |  | Ø 16 mm  |                   |        | Ø 20 mm           |  |  |
| 10                                                  | 170899 | DFM-12-10-P-A-KF   |          |  |  | 170907   | DFM-16-10-P-A-KF  | –      |                   |  |  |
| 20                                                  | 170900 | DFM-12-20-P-A-KF   |          |  |  | 170908   | DFM-16-20-P-A-KF  | 170915 | DFM-20-20-P-A-KF  |  |  |
| 25                                                  | 170901 | DFM-12-25-P-A-KF   |          |  |  | 170909   | DFM-16-25-P-A-KF  | 170916 | DFM-20-25-P-A-KF  |  |  |
| 30                                                  | 170902 | DFM-12-30-P-A-KF   |          |  |  | 170910   | DFM-16-30-P-A-KF  | 170917 | DFM-20-30-P-A-KF  |  |  |
| 40                                                  | 170903 | DFM-12-40-P-A-KF   |          |  |  | 170911   | DFM-16-40-P-A-KF  | 170918 | DFM-20-40-P-A-KF  |  |  |
| 50                                                  | 170904 | DFM-12-50-P-A-KF   |          |  |  | 170912   | DFM-16-50-P-A-KF  | 170919 | DFM-20-50-P-A-KF  |  |  |
| 80                                                  | 170905 | DFM-12-80-P-A-KF   |          |  |  | 170913   | DFM-16-80-P-A-KF  | 170920 | DFM-20-80-P-A-KF  |  |  |
| 100                                                 | 170906 | DFM-12-100-P-A-KF  |          |  |  | 170914   | DFM-16-100-P-A-KF | 170921 | DFM-20-100-P-A-KF |  |  |
|                                                     |        |                    |          |  |  |          |                   |        |                   |  |  |
| Stroke [mm]                                         |        |                    | Ø 25 mm  |  |  | Ø 32 mm  |                   |        | Ø 40 mm           |  |  |
| 20                                                  | 170922 | DFM-25-20-P-A-KF   |          |  |  | 170929   | DFM-32-20-P-A-KF  | –      |                   |  |  |
| 25                                                  | 170923 | DFM-25-25-P-A-KF   |          |  |  | 170930   | DFM-32-25-P-A-KF  | 170939 | DFM-40-25-P-A-KF  |  |  |
| 30                                                  | 170924 | DFM-25-30-P-A-KF   |          |  |  | 170931   | DFM-32-30-P-A-KF  | –      |                   |  |  |
| 40                                                  | 170925 | DFM-25-40-P-A-KF   |          |  |  | 170932   | DFM-32-40-P-A-KF  |        |                   |  |  |
| 50                                                  | 170926 | DFM-25-50-P-A-KF   |          |  |  | 170933   | DFM-32-50-P-A-KF  | 170940 | DFM-40-50-P-A-KF  |  |  |
| 80                                                  | 170927 | DFM-25-80-P-A-KF   |          |  |  | 170934   | DFM-32-80-P-A-KF  | 170941 | DFM-40-80-P-A-KF  |  |  |
| 100                                                 | 170928 | DFM-25-100-P-A-KF  |          |  |  | 170935   | DFM-32-100-P-A-KF | 170942 | DFM-40-100-P-A-KF |  |  |
| 125                                                 | –      |                    |          |  |  | 170936   | DFM-32-125-P-A-KF | 170943 | DFM-40-125-P-A-KF |  |  |
| 160                                                 |        |                    |          |  |  | 170937   | DFM-32-160-P-A-KF | 170944 | DFM-40-160-P-A-KF |  |  |
| 200                                                 |        |                    |          |  |  | 170938   | DFM-32-200-P-A-KF | 170945 | DFM-40-200-P-A-KF |  |  |
|                                                     |        |                    |          |  |  |          |                   |        |                   |  |  |
| Stroke [mm]                                         |        |                    | Ø 50 mm  |  |  | Ø 63 mm  |                   |        | Ø 80 mm           |  |  |
| 25                                                  | 170946 | DFM-50-25-P-A-KF   |          |  |  | 170953   | DFM-63-25-P-A-KF  | 170960 | DFM-80-25-P-A-KF  |  |  |
| 50                                                  | 170947 | DFM-50-50-P-A-KF   |          |  |  | 170954   | DFM-63-50-P-A-KF  | 170961 | DFM-80-50-P-A-KF  |  |  |
| 80                                                  | 170948 | DFM-50-80-P-A-KF   |          |  |  | 170955   | DFM-63-80-P-A-KF  | 170962 | DFM-80-80-P-A-KF  |  |  |
| 100                                                 | 170949 | DFM-50-100-P-A-KF  |          |  |  | 170956   | DFM-63-100-P-A-KF | 170963 | DFM-80-100-P-A-KF |  |  |
| 125                                                 | 170950 | DFM-50-125-P-A-KF  |          |  |  | 170957   | DFM-63-125-P-A-KF | 170964 | DFM-80-125-P-A-KF |  |  |
| 160                                                 | 170951 | DFM-50-160-P-A-KF  |          |  |  | 170958   | DFM-63-160-P-A-KF | 170965 | DFM-80-160-P-A-KF |  |  |
| 200                                                 | 170952 | DFM-50-200-P-A-KF  |          |  |  | 170959   | DFM-63-200-P-A-KF | 170966 | DFM-80-200-P-A-KF |  |  |
|                                                     |        |                    |          |  |  |          |                   |        |                   |  |  |
| Stroke [mm]                                         |        |                    | Ø 100 mm |  |  | –        |                   |        |                   |  |  |
| 25                                                  | 170967 | DFM-100-25-P-A-KF  |          |  |  |          |                   |        |                   |  |  |
| 50                                                  | 170968 | DFM-100-50-P-A-KF  |          |  |  |          |                   |        |                   |  |  |
| 80                                                  | 170969 | DFM-100-80-P-A-KF  |          |  |  |          |                   |        |                   |  |  |
| 100                                                 | 170970 | DFM-100-100-P-A-KF |          |  |  |          |                   |        |                   |  |  |
| 125                                                 | 170971 | DFM-100-125-P-A-KF |          |  |  |          |                   |        |                   |  |  |
| 160                                                 | 170972 | DFM-100-160-P-A-KF |          |  |  |          |                   |        |                   |  |  |
| 200                                                 | 170973 | DFM-100-200-P-A-KF |          |  |  |          |                   |        |                   |  |  |

## Datasheet



| Ordering data – Recirculating ball bearing guide KF and variant F1A (recommended for production facilities for manufacturing lithium-ion batteries) |                |                       |                |                       |                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------|----------------|-----------------------|-------------------------------|
|                                                                                                                                                     | Part no.       | Type                  | Part no.       | Type                  | Part no. Type                 |
| <b>Stroke [mm]</b>                                                                                                                                  | <b>Ø 12 mm</b> |                       | <b>Ø 16 mm</b> |                       | <b>Ø 20 mm</b>                |
| 10                                                                                                                                                  | 8118631        | DFM-12-10-P-A-KF-F1A  | 8118830        | DFM-16-10-P-A-KF-F1A  | –                             |
| 20                                                                                                                                                  | 8118632        | DFM-12-20-P-A-KF-F1A  | 8118831        | DFM-16-20-P-A-KF-F1A  | 8118850 DFM-20-20-P-A-KF-F1A  |
| 25                                                                                                                                                  | 8118633        | DFM-12-25-P-A-KF-F1A  | 8118832        | DFM-16-25-P-A-KF-F1A  | 8118851 DFM-20-25-P-A-KF-F1A  |
| 30                                                                                                                                                  | 8118634        | DFM-12-30-P-A-KF-F1A  | 8118833        | DFM-16-30-P-A-KF-F1A  | 8118852 DFM-20-30-P-A-KF-F1A  |
| 40                                                                                                                                                  | 8118635        | DFM-12-40-P-A-KF-F1A  | 8118834        | DFM-16-40-P-A-KF-F1A  | 8118853 DFM-20-40-P-A-KF-F1A  |
| 50                                                                                                                                                  | 8118636        | DFM-12-50-P-A-KF-F1A  | 8118835        | DFM-16-50-P-A-KF-F1A  | 8118854 DFM-20-50-P-A-KF-F1A  |
| 80                                                                                                                                                  | 8118637        | DFM-12-80-P-A-KF-F1A  | 8118836        | DFM-16-80-P-A-KF-F1A  | 8118855 DFM-20-80-P-A-KF-F1A  |
| 100                                                                                                                                                 | 8118638        | DFM-12-100-P-A-KF-F1A | 8118837        | DFM-16-100-P-A-KF-F1A | 8118856 DFM-20-100-P-A-KF-F1A |
| <b>Stroke [mm]</b>                                                                                                                                  | <b>Ø 25 mm</b> |                       | <b>Ø 32 mm</b> |                       | <b>Ø 40 mm</b>                |
| 20                                                                                                                                                  | 8118869        | DFM-25-20-P-A-KF-F1A  | 8118891        | DFM-32-20-P-A-KF-F1A  | –                             |
| 25                                                                                                                                                  | 8118870        | DFM-25-25-P-A-KF-F1A  | 8118892        | DFM-32-25-P-A-KF-F1A  | 8118914 DFM-40-25-P-A-KF-F1A  |
| 30                                                                                                                                                  | 8118871        | DFM-25-30-P-A-KF-F1A  | 8118893        | DFM-32-30-P-A-KF-F1A  | –                             |
| 40                                                                                                                                                  | 8118872        | DFM-25-40-P-A-KF-F1A  | 8118894        | DFM-32-40-P-A-KF-F1A  | 8118915 DFM-40-50-P-A-KF-F1A  |
| 50                                                                                                                                                  | 8118873        | DFM-25-50-P-A-KF-F1A  | 8118895        | DFM-32-50-P-A-KF-F1A  | 8118916 DFM-40-80-P-A-KF-F1A  |
| 80                                                                                                                                                  | 8118874        | DFM-25-80-P-A-KF-F1A  | 8118896        | DFM-32-80-P-A-KF-F1A  | 8118917 DFM-40-100-P-A-KF-F1A |
| 100                                                                                                                                                 | 8118875        | DFM-25-100-P-A-KF-F1A | 8118897        | DFM-32-100-P-A-KF-F1A | 8118918 DFM-40-125-P-A-KF-F1A |
| 125                                                                                                                                                 | –              |                       | 8118898        | DFM-32-125-P-A-KF-F1A | 8118919 DFM-40-160-P-A-KF-F1A |
| 160                                                                                                                                                 |                |                       | 8118899        | DFM-32-160-P-A-KF-F1A | 8118920 DFM-40-200-P-A-KF-F1A |
| 200                                                                                                                                                 |                |                       | 8118900        | DFM-32-200-P-A-KF-F1A |                               |
| <b>Stroke [mm]</b>                                                                                                                                  | <b>Ø 50 mm</b> |                       | <b>Ø 63 mm</b> |                       | –                             |
| 25                                                                                                                                                  | 8118934        | DFM-50-25-P-A-KF-F1A  | 8118954        | DFM-63-25-P-A-KF-F1A  |                               |
| 50                                                                                                                                                  | 8118935        | DFM-50-50-P-A-KF-F1A  | 8118955        | DFM-63-50-P-A-KF-F1A  |                               |
| 80                                                                                                                                                  | 8118936        | DFM-50-80-P-A-KF-F1A  | 8118956        | DFM-63-80-P-A-KF-F1A  |                               |
| 100                                                                                                                                                 | 8118937        | DFM-50-100-P-A-KF-F1A | 8118957        | DFM-63-100-P-A-KF-F1A |                               |
| 125                                                                                                                                                 | 8118938        | DFM-50-125-P-A-KF-F1A | 8118958        | DFM-63-125-P-A-KF-F1A |                               |
| 160                                                                                                                                                 | 8118939        | DFM-50-160-P-A-KF-F1A | 8118959        | DFM-63-160-P-A-KF-F1A |                               |
| 200                                                                                                                                                 | 8118940        | DFM-50-200-P-A-KF-F1A | 8118960        | DFM-63-200-P-A-KF-F1A |                               |

## Peripherals overview

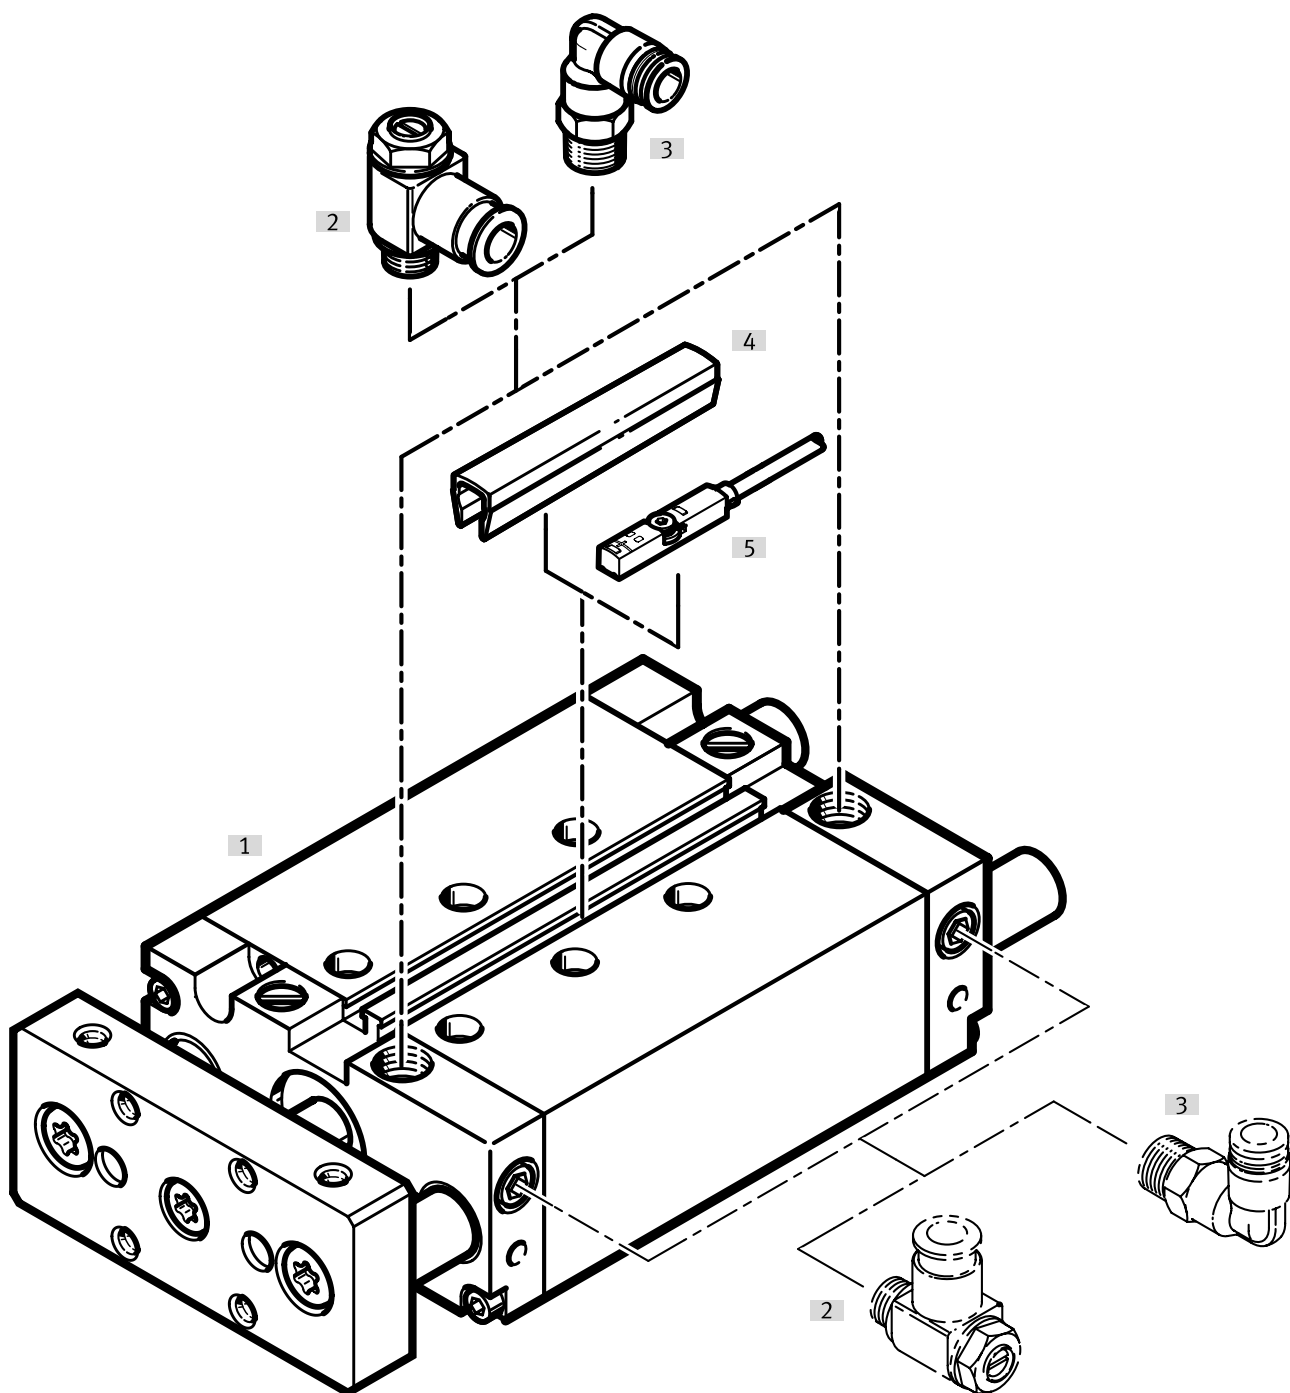

DFM-B-12-P

DFM-B-12-P-AJ

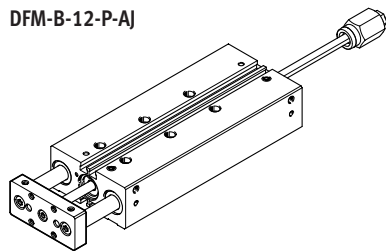

-  - Note

Proximity switch SM...O-8E cannot be used with the DFM-B.

## Peripherals overview

| Accessories |                                 | Description                                                              | → Page/Internet |
|-------------|---------------------------------|--------------------------------------------------------------------------|-----------------|
| [1]         | Guided drive DFM-B              | Guided drive, function-optimised                                         | 42              |
| [2]         | One-way flow control valve GRLA | For regulating speed                                                     | 78              |
| [3]         | Push-in fitting QS              | For connecting tubing with standard O.D.                                 | qs              |
| [4]         | Slot cover ABP-5-S              | For protecting the sensor cables and the sensor slots from contamination | 78              |
| [5]         | Proximity switch SME-/SMT-8/10  | Can be integrated in the profile barrel                                  | 76              |
| –           | Centring sleeves ZBH            | 4 or 6 included in the scope of delivery                                 | 75              |





### Variants

AJ

EJ



AJ + EJ

YSRW

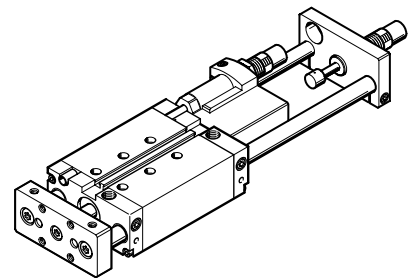

## Datasheet

## Function



Ø Diameter  
12 ... 63 mm

Stroke length  
10 ... 400 mm





[www.festo.com](http://www.festo.com)



Repair service  
Piston Ø 12 ... 63 mm

$$r = \sqrt{\frac{2 \cdot B}{m_1 + m_2}}$$

$$m_1 = \frac{2 \cdot B}{r^2} - m_2$$

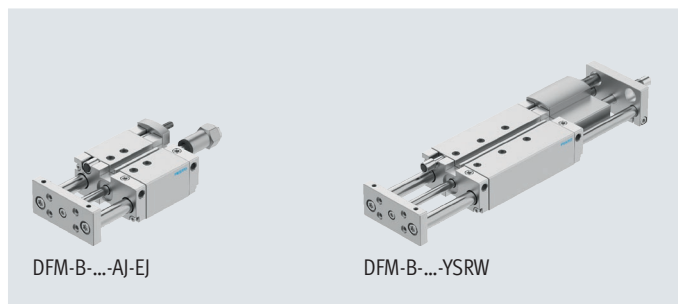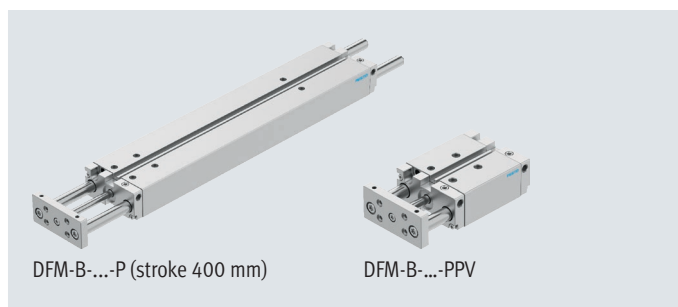

| General technical data            |                                                                       |                                              |                             |           |      |      |      |      |
|-----------------------------------|-----------------------------------------------------------------------|----------------------------------------------|-----------------------------|-----------|------|------|------|------|
| Piston Ø                          | 12                                                                    | 16                                           | 20                          | 25        | 32   | 40   | 50   | 63   |
| Pneumatic connection              | M5                                                                    | M5                                           | M5                          | G1/8      | G1/8 | G1/8 | G1/4 | G1/4 |
| Design                            | Piston                                                                |                                              |                             |           |      |      |      |      |
|                                   | Piston rod                                                            |                                              |                             |           |      |      |      |      |
|                                   | Guide rods with yoke                                                  |                                              |                             |           |      |      |      |      |
| Cushioning                        |                                                                       |                                              |                             |           |      |      |      |      |
| DFM-...-P                         | Elastic cushioning rings/plates at both ends                          |                                              |                             |           |      |      |      |      |
| DFM-...-PPV                       | –                                                                     | Pneumatic cushioning adjustable at both ends |                             |           |      |      |      |      |
| DFM-...-YSRW                      | –                                                                     |                                              | Self-adjusting at both ends |           |      |      |      |      |
| Cushioning length                 |                                                                       |                                              |                             |           |      |      |      |      |
| DFM-...-PPV                       | [mm]                                                                  | –                                            | 12                          | 15        | 15   | 16   | 17   | 19   |
| Position sensing                  | Via proximity switch                                                  |                                              |                             |           |      |      |      |      |
| Type of mounting                  | With through-hole                                                     |                                              |                             |           |      |      |      |      |
|                                   | With female thread                                                    |                                              |                             |           |      |      |      |      |
| Mounting position                 | Any                                                                   |                                              |                             |           |      |      |      |      |
| Protection against rotation/guide | Guide rod with yoke/plain-bearing or recirculating ball bearing guide |                                              |                             |           |      |      |      |      |
| Variant AJ                        |                                                                       |                                              |                             |           |      |      |      |      |
| Setting range                     | [mm]                                                                  | 0 ... 10                                     |                             |           |      |      |      |      |
| Variant EJ and YSRW               |                                                                       |                                              |                             |           |      |      |      |      |
| Setting range                     | [mm]                                                                  | –                                            | –                           | 0 ... 10  |      |      |      |      |
| Variant YSRW with shock absorber  |                                                                       |                                              |                             |           |      |      |      |      |
| Repetition accuracy               | [mm]                                                                  | –                                            | –                           | Max. 0.05 |      |      |      |      |

• Note: This product conforms to ISO 1179-1 and ISO 228-1.

## Datasheet

| Operating and environmental conditions       |                                                                   |                                                                                            |    |    |            |    |    |           |    |
|----------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------|----|----|------------|----|----|-----------|----|
| Piston Ø                                     |                                                                   | 12                                                                                         | 16 | 20 | 25         | 32 | 40 | 50        | 63 |
| Operating pressure                           |                                                                   |                                                                                            |    |    |            |    |    |           |    |
|                                              | [MPa]                                                             | 0.2 ... 1                                                                                  |    |    | 0.15 ... 1 |    |    | 0.1 ... 1 |    |
|                                              | [bar]                                                             | 2 ... 10                                                                                   |    |    | 1.5 ... 10 |    |    | 1 ... 10  |    |
| Operating medium                             |                                                                   | Compressed air to ISO 8573-1:2010 [7:4:4]                                                  |    |    |            |    |    |           |    |
| Note on operating/pilot medium               |                                                                   | Lubricated operation possible (in which case lubricated operation will always be required) |    |    |            |    |    |           |    |
| Ambient temperature <sup>1)</sup>            |                                                                   |                                                                                            |    |    |            |    |    |           |    |
| DFM-...-GF                                   | [°C]                                                              | -20 ... +80                                                                                |    |    |            |    |    |           |    |
| DFM-...-KF                                   | [°C]                                                              | -5 ... +60                                                                                 |    |    |            |    |    |           |    |
| DFM-...-YSRW                                 | [°C]                                                              | 0 ... +60                                                                                  |    |    |            |    |    |           |    |
| DFM-...-S6                                   | [°C]                                                              | 0 ... +120                                                                                 |    |    |            |    |    |           |    |
| Corrosion resistance class CRC <sup>2)</sup> |                                                                   |                                                                                            |    |    |            |    |    |           |    |
| DFM-...-GF                                   | 2 - Moderate corrosion stress                                     |                                                                                            |    |    |            |    |    |           |    |
| DFM-...-S6                                   | 2 - Moderate corrosion stress                                     |                                                                                            |    |    |            |    |    |           |    |
| Cleanroom class                              | -                                                                 | 6 according to ISO 14644-1                                                                 |    |    |            |    |    |           | -  |
| ATEX                                         | Selected types → <a href="http://www.festo.com">www.festo.com</a> |                                                                                            |    |    |            |    |    |           |    |

1) Note operating range of proximity switches

2) More information [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

| Speeds [m/s]                                                |     |     |     |     |     |     |     |     |
|-------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Piston Ø                                                    | 12  | 16  | 20  | 25  | 32  | 40  | 50  | 63  |
| Cushioning P, precision stroke adjustment AJ and EJ         |     |     |     |     |     |     |     |     |
| Maximum speed advancing, retracting                         | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.6 | 0.6 |
| Cushioning P, plain-bearing guide GF in conjunction with S6 |     |     |     |     |     |     |     |     |
| Maximum speed advancing, retracting                         | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.4 | 0.4 |
| Cushioning PPV, YSRW, PPV S6                                |     |     |     |     |     |     |     |     |
| Maximum speed advancing, retracting                         | –   | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1   | 1   |

| Forces [N]                                               |    |     |     |     |     |     |      |      |
|----------------------------------------------------------|----|-----|-----|-----|-----|-----|------|------|
| Piston Ø                                                 | 12 | 16  | 20  | 25  | 32  | 40  | 50   | 63   |
| Cushioning P, PPV, YSRW, precision stroke adjustment EJ  |    |     |     |     |     |     |      |      |
| Theoretical force at 0.6 MPa (6 bar, 87 psi), advancing  | 68 | 121 | 188 | 295 | 482 | 754 | 1178 | 1870 |
| Theoretical force at 0.6 MPa (6 bar, 87 psi), retracting | 51 | 90  | 141 | 247 | 415 | 686 | 1057 | 1750 |
| Precision stroke adjustment AJ and AJ+EJ                 |    |     |     |     |     |     |      |      |
| Theoretical force at 0.6 MPa (6 bar, 87 psi), advancing  | 51 | 90  | 141 | 247 | 415 | 686 | 1057 | 1750 |
| Theoretical force at 0.6 MPa (6 bar, 87 psi), retracting | 51 | 90  | 141 | 247 | 415 | 686 | 1057 | 1750 |

## Datasheet

| Impact energy [J]                          |       |       |       |       |       |       |       |        |
|--------------------------------------------|-------|-------|-------|-------|-------|-------|-------|--------|
| Piston Ø                                   | 12    | 16    | 20    | 25    | 32    | 40    | 50    | 63     |
| <b>Cushioning P</b>                        |       |       |       |       |       |       |       |        |
| Max. impact energy in the end positions    | 0.09  | 0.15  | 0.2   | 0.35  | 0.40  | 0.7   | 1.0   | 1.3    |
| Max. impact energy in the end positions S6 | 0.035 | 0.075 | 0.1   | 0.15  | 0.2   | 0.35  | 0.5   | 0.65   |
| <b>Cushioning YSRW</b>                     |       |       |       |       |       |       |       |        |
| Max. energy absorption per stroke          | –     | –     | 4     | 8     | 12    | 35    | 35    | 70     |
| Max. energy absorption per hour            | –     | –     | 21000 | 30000 | 41000 | 68000 | 68000 | 100000 |

Permissible impact velocity:

|                |                          |
|----------------|--------------------------|
| v              | Permissible impact speed |
| E              | Max. impact energy       |
| m <sub>1</sub> | Moving mass (drive)      |
| m <sub>2</sub> | Moving payload           |

Maximum permissible mass:

**Note**

These specifications represent the maximum values that can be achieved. The maximum permissible impact energy must be observed.

## Datasheet

| DFM-B with plain-bearing guide GF, cushioning P, PPV |          |      |      |      |      |      |       |       |
|------------------------------------------------------|----------|------|------|------|------|------|-------|-------|
| Stroke<br>[mm]                                       | Piston Ø |      |      |      |      |      |       |       |
|                                                      | 12       | 16   | 20   | 25   | 32   | 40   | 50    | 63    |
| Product weight [g]                                   |          |      |      |      |      |      |       |       |
| 10                                                   | 385      | 621  | –    | –    | –    | –    | –     | –     |
| 20                                                   | 432      | 680  | 1026 | 1474 | 2163 | –    | –     | –     |
| 25                                                   | 452      | 706  | 1068 | 1530 | 2238 | 2606 | 4290  | 5568  |
| 30                                                   | 476      | 736  | 1109 | 1586 | 2337 | –    | –     | –     |
| 40                                                   | 523      | 795  | 1215 | 1726 | 2489 | –    | –     | –     |
| 50                                                   | 570      | 854  | 1298 | 1838 | 2640 | 3047 | 5019  | 6457  |
| 80                                                   | 712      | 1033 | 1572 | 2218 | 3210 | 3663 | 5909  | 7503  |
| 100                                                  | 803      | 1148 | 1733 | 2435 | 3502 | 3981 | 6376  | 8116  |
| 125                                                  | 962      | 1352 | 2000 | 2800 | 4018 | 4534 | 7151  | 9050  |
| 160                                                  | 1128     | 1560 | 2293 | 3193 | 4549 | 5118 | 8017  | 10137 |
| 200                                                  | 1318     | 1797 | 2628 | 3642 | 5158 | 5786 | 9007  | 11379 |
| 250                                                  | –        | –    | 3237 | 4430 | 6259 | 6962 | 10813 | 13509 |
| 320                                                  | –        | –    | 3823 | 5215 | 7322 | 8129 | 12545 | 15682 |
| 400                                                  | –        | –    | 4493 | 6113 | 8537 | 9462 | 14525 | 18165 |
| Moving mass [g]                                      |          |      |      |      |      |      |       |       |
| 10                                                   | 201      | 283  | –    | –    | –    | –    | –     | –     |
| 20                                                   | 216      | 302  | 506  | 715  | 1147 | –    | –     | –     |
| 25                                                   | 223      | 312  | 520  | 734  | 1176 | 1305 | 2217  | 2640  |
| 30                                                   | 230      | 322  | 534  | 753  | 1230 | –    | –     | –     |
| 40                                                   | 245      | 342  | 586  | 823  | 1289 | –    | –     | –     |
| 50                                                   | 260      | 362  | 615  | 861  | 1347 | 1476 | 2567  | 2990  |
| 80                                                   | 304      | 423  | 724  | 1022 | 1644 | 1776 | 3002  | 3426  |
| 100                                                  | 333      | 463  | 781  | 1098 | 1764 | 1893 | 3189  | 3613  |
| 125                                                  | 420      | 579  | 917  | 1289 | 2059 | 2188 | 3586  | 4009  |
| 160                                                  | 472      | 649  | 1016 | 1422 | 2264 | 2393 | 3913  | 4336  |
| 200                                                  | 530      | 730  | 1129 | 1573 | 2499 | 2627 | 4286  | 4710  |
| 250                                                  | –        | –    | 1489 | 2017 | 3164 | 3293 | 5351  | 5774  |
| 320                                                  | –        | –    | 1688 | 2283 | 3574 | 3703 | 6005  | 6428  |
| 400                                                  | –        | –    | 1914 | 2587 | 4042 | 4171 | 6752  | 7176  |

## Datasheet

| DFM-B with plain-bearing guide GF, cushioning P, PPV, variant S6 |          |      |      |      |      |      |       |       |
|------------------------------------------------------------------|----------|------|------|------|------|------|-------|-------|
| Stroke<br>[mm]                                                   | Piston Ø |      |      |      |      |      |       |       |
|                                                                  | 12       | 16   | 20   | 25   | 32   | 40   | 50    | 63    |
| Product weight [g]                                               |          |      |      |      |      |      |       |       |
| 0                                                                | 283      | 488  | 745  | 1080 | 1594 | 1847 | 3124  | 3992  |
| 10                                                               | 328      | 548  | –    | –    | –    | –    | –     | –     |
| 20                                                               | 376      | 607  | 907  | 1298 | 1889 | –    | –     | –     |
| 25                                                               | 395      | 633  | 949  | 1354 | 1964 | 2257 | 3735  | 4762  |
| 30                                                               | 419      | 663  | 990  | 1410 | 2063 | –    | –     | –     |
| 40                                                               | 466      | 722  | 1096 | 1550 | 2215 | –    | –     | –     |
| 50                                                               | 514      | 781  | 1179 | 1662 | 2366 | 2698 | 4464  | 5651  |
| 80                                                               | 656      | 959  | 1452 | 2042 | 2936 | 3314 | 5354  | 6696  |
| 100                                                              | 747      | 1074 | 1614 | 2259 | 3228 | 3632 | 5821  | 7310  |
| 125                                                              | 905      | 1279 | 1880 | 2624 | 3745 | 4186 | 6596  | 8244  |
| 160                                                              | 1072     | 1486 | 2173 | 3017 | 4276 | 4770 | 7462  | 9331  |
| 200                                                              | 1261     | 1724 | 2508 | 3466 | 4884 | 5437 | 8452  | 10573 |
| 250                                                              | –        | –    | 3118 | 4254 | 5985 | 6613 | 10258 | 12703 |
| 320                                                              | –        | –    | 3704 | 5039 | 7048 | 7780 | 11990 | 14876 |
| 400                                                              | –        | –    | 4374 | 5937 | 8264 | 9114 | 19970 | 17359 |
| Moving mass [g]                                                  |          |      |      |      |      |      |       |       |
| 0                                                                | 130      | 188  | 329  | 463  | 755  | 810  | 1428  | 1601  |
| 10                                                               | 145      | 208  | –    | –    | –    | –    | –     | –     |
| 20                                                               | 159      | 229  | 386  | 539  | 873  | –    | –     | –     |
| 25                                                               | 167      | 239  | 400  | 558  | 902  | 956  | 1662  | 1834  |
| 30                                                               | 174      | 249  | 414  | 577  | 956  | –    | –     | –     |
| 40                                                               | 188      | 269  | 467  | 647  | 1015 | –    | –     | –     |
| 50                                                               | 203      | 289  | 495  | 685  | 1073 | 1127 | 2012  | 2184  |
| 80                                                               | 247      | 349  | 604  | 847  | 1373 | 1427 | 2447  | 2620  |
| 100                                                              | 276      | 389  | 661  | 922  | 1490 | 1544 | 2634  | 2806  |
| 125                                                              | 364      | 506  | 797  | 1113 | 1785 | 1840 | 3031  | 3203  |
| 160                                                              | 415      | 576  | 896  | 1246 | 1990 | 2045 | 3358  | 3530  |
| 200                                                              | 474      | 657  | 1010 | 1397 | 2225 | 2279 | 3731  | 3904  |
| 250                                                              | –        | –    | 1370 | 1842 | 2890 | 2944 | 4796  | 4968  |
| 320                                                              | –        | –    | 1568 | 2107 | 3300 | 3354 | 5450  | 5622  |
| 400                                                              | –        | –    | 1794 | 2411 | 3768 | 3823 | 6197  | 6370  |

## Datasheet

| DFM-B with recirculating ball bearing guide KE, cushioning P, PPV |          |      |      |      |      |      |       |       |
|-------------------------------------------------------------------|----------|------|------|------|------|------|-------|-------|
| Stroke<br>[mm]                                                    | Piston Ø |      |      |      |      |      |       |       |
|                                                                   | 12       | 16   | 20   | 25   | 32   | 40   | 50    | 63    |
| Product weight [g]                                                |          |      |      |      |      |      |       |       |
| 10                                                                | 345      | 543  | –    | –    | –    | –    | –     | –     |
| 20                                                                | 388      | 596  | 935  | 1395 | 1932 | –    | –     | –     |
| 25                                                                | 405      | 619  | 974  | 1447 | 1998 | 2366 | 3907  | 5185  |
| 30                                                                | 427      | 647  | 1012 | 1499 | 2079 | –    | –     | –     |
| 40                                                                | 470      | 700  | 1105 | 1624 | 2213 | –    | –     | –     |
| 50                                                                | 513      | 754  | 1181 | 1729 | 2346 | 2753 | 4523  | 5961  |
| 80                                                                | 641      | 916  | 1428 | 2074 | 2817 | 3270 | 5272  | 6865  |
| 100                                                               | 723      | 1020 | 1577 | 2276 | 3073 | 3552 | 5682  | 7423  |
| 125                                                               | 852      | 1190 | 1809 | 2599 | 3490 | 4006 | 6327  | 8226  |
| 160                                                               | 1002     | 1378 | 2079 | 2966 | 3958 | 4526 | 7094  | 9214  |
| 200                                                               | 1174     | 1593 | 2388 | 3384 | 4494 | 5121 | 7971  | 10343 |
| 250                                                               | –        | –    | 2905 | 4073 | 5369 | 6072 | 9419  | 12115 |
| 320                                                               | –        | –    | 3445 | 4805 | 6305 | 7112 | 10953 | 14091 |
| 400                                                               | –        | –    | 4063 | 5642 | 7376 | 8301 | 12707 | 16347 |
| Moving mass [g]                                                   |          |      |      |      |      |      |       |       |
| 10                                                                | 168      | 239  | –    | –    | –    | –    | –     | –     |
| 20                                                                | 178      | 254  | 437  | 631  | 933  | –    | –     | –     |
| 25                                                                | 183      | 261  | 447  | 646  | 954  | 1082 | 1830  | 2254  |
| 30                                                                | 188      | 268  | 458  | 661  | 990  | –    | –     | –     |
| 40                                                                | 198      | 283  | 498  | 716  | 1030 | –    | –     | –     |
| 50                                                                | 208      | 297  | 520  | 746  | 1071 | 1199 | 2067  | 2491  |
| 80                                                                | 238      | 341  | 602  | 873  | 1271 | 1400 | 2361  | 2785  |
| 100                                                               | 259      | 370  | 646  | 934  | 1352 | 1481 | 2492  | 2915  |
| 125                                                               | 316      | 452  | 748  | 1083 | 1548 | 1677 | 2758  | 3182  |
| 160                                                               | 352      | 503  | 824  | 1189 | 1690 | 1819 | 2986  | 3410  |
| 200                                                               | 392      | 561  | 911  | 1310 | 1852 | 1981 | 3247  | 3671  |
| 250                                                               | –        | –    | 1180 | 1656 | 2291 | 2420 | 3953  | 4377  |
| 320                                                               | –        | –    | 1332 | 1868 | 2575 | 2703 | 4410  | 4833  |
| 400                                                               | –        | –    | 1505 | 2111 | 2899 | 3027 | 4931  | 5355  |

## Datasheet

### Additional weights for precision stroke adjustment AJ – GF, KF

When using the precision stroke adjustment AJ, the following weight must be taken into account in addition to the mass specified from page 44.

| Product weight [g] Precision stroke adjustment AJ (piston rod + stop) |          |       |       |       |       |       |       |       |
|-----------------------------------------------------------------------|----------|-------|-------|-------|-------|-------|-------|-------|
| Stroke<br>[mm]                                                        | Piston ø |       |       |       |       |       |       |       |
|                                                                       | 12       | 16    | 20    | 25    | 32    | 40    | 50    | 63    |
| 10                                                                    | 55.4     | 58.8  | –     | –     | –     | –     | –     | –     |
| 20                                                                    | 57.6     | 61    | 75.6  | 115.4 | 185.7 | –     | –     | –     |
| 25                                                                    | 58.7     | 62.1  | 77.6  | 118.5 | 190.2 | 188.7 | 350.7 | 350.5 |
| 30                                                                    | 59.9     | 63.3  | 79.6  | 121.6 | 194.7 | –     | –     | –     |
| 40                                                                    | 62.1     | 65.5  | 83.6  | 127.8 | 203.6 | –     | –     | –     |
| 50                                                                    | 64.3     | 67.7  | 87.5  | 134   | 212.5 | 211   | 390.4 | 390.2 |
| 80                                                                    | 71       | 74.4  | 99.5  | 152.6 | 239.3 | 237.8 | 438   | 437.8 |
| 100                                                                   | 75.5     | 78.9  | 107.5 | 165   | 257.2 | 255.7 | 469.8 | 469.6 |
| 125                                                                   | 81.1     | 84.5  | 117.3 | 180.5 | 279.5 | 278   | 509.5 | 509.3 |
| 160                                                                   | 88.9     | 92.3  | 131.2 | 202.5 | 310.8 | 309.3 | 565.1 | 564.9 |
| 200                                                                   | 97.8     | 101.2 | 147.1 | 227   | 346.5 | 345   | 628.6 | 628.4 |
| 250                                                                   | –        | –     | 167   | 258.1 | 391.2 | 389.7 | 708.1 | 707.9 |
| 320                                                                   | –        | –     | 194.8 | 301.5 | 453.8 | 452.3 | 819.2 | 819   |
| 400                                                                   | –        | –     | 226.5 | 351.1 | 525.2 | 523.7 | 946.3 | 946.1 |

| Moving mass [g] Precision stroke adjustment AJ (piston rod + stop) |          |      |       |       |       |       |       |       |
|--------------------------------------------------------------------|----------|------|-------|-------|-------|-------|-------|-------|
| Stroke<br>[mm]                                                     | Piston ø |      |       |       |       |       |       |       |
|                                                                    | 12       | 16   | 20    | 25    | 32    | 40    | 50    | 63    |
| 10                                                                 | 51.5     | 52.3 | –     | –     | –     | –     | –     | –     |
| 20                                                                 | 53.7     | 54.5 | 76    | 116.6 | 185.9 | –     | –     | –     |
| 25                                                                 | 54.8     | 55.6 | 78    | 119.7 | 190.4 | 190   | 351.7 | 351.7 |
| 30                                                                 | 56       | 56.8 | 80    | 122.8 | 194.9 | –     | –     | –     |
| 40                                                                 | 58.2     | 59   | 84    | 129   | 203.8 | –     | –     | –     |
| 50                                                                 | 60.4     | 61.2 | 87.9  | 135.2 | 212.7 | 212.7 | 391.4 | 391.4 |
| 80                                                                 | 67.1     | 67.9 | 99.9  | 153.8 | 239.5 | 239.5 | 439   | 439   |
| 100                                                                | 71.6     | 72.4 | 107.8 | 166.2 | 257.4 | 257.4 | 470.8 | 470.8 |
| 125                                                                | 77.2     | 78   | 117.7 | 181.7 | 279.7 | 279.7 | 510.5 | 510.5 |
| 160                                                                | 85       | 85.8 | 131.6 | 203.4 | 311   | 311   | 566.1 | 566.1 |
| 200                                                                | 93.9     | 94.7 | 147.5 | 228.2 | 346.7 | 346.7 | 629.6 | 629.6 |
| 250                                                                | –        | –    | 167.4 | 259.3 | 391.4 | 391.4 | 709.1 | 709.1 |
| 320                                                                | –        | –    | 195.2 | 302.7 | 454   | 454   | 820.2 | 820.2 |
| 400                                                                | –        | –    | 226.9 | 352.3 | 525.4 | 525.4 | 947.3 | 947.3 |

## Datasheet

### Additional weights for precision stroke adjustment EJ – GF, KF

When using the precision stroke adjustment EJ, the following weight must be taken into account in addition to the mass specified from page 44.

| Product weight [g] Precision stroke adjustment EJ (piston rod + stop) |          |       |       |       |       |       |
|-----------------------------------------------------------------------|----------|-------|-------|-------|-------|-------|
| Stroke<br>[mm]                                                        | Piston Ø |       |       |       |       |       |
|                                                                       | 20       | 25    | 32    | 40    | 50    | 63    |
| 20                                                                    | 55.7     | 117.1 | 134.1 | –     | –     | –     |
| 25                                                                    | 56.4     | 119.1 | 136.1 | 153.9 | 302.8 | 354   |
| 30                                                                    | 57.2     | 121   | 138   | –     | –     | –     |
| 40                                                                    | 58.8     | 125   | 142   | –     | –     | –     |
| 50                                                                    | 60.3     | 129   | 146   | 163.8 | 318.3 | 369.5 |
| 80                                                                    | 65       | 140.9 | 157.9 | 175.7 | 336.9 | 388.1 |
| 100                                                                   | 68.1     | 148.8 | 165.8 | 183.6 | 349.4 | 400.6 |
| 125                                                                   | 71.9     | 158.8 | 175.8 | 193.6 | 364.9 | 416.1 |
| 160                                                                   | 77.4     | 172.7 | 189.7 | 207.5 | 386.6 | 437.8 |
| 200                                                                   | 83.6     | 188.5 | 205.5 | 223.3 | 411.4 | 462.6 |
| 250                                                                   | 91.3     | 208.4 | 225.4 | 243.2 | 442.4 | 493.6 |
| 320                                                                   | 102.2    | 236.2 | 253.2 | 271   | 485.9 | 537.1 |
| 400                                                                   | 114.6    | 268   | 285   | 302.8 | 535.5 | 586.7 |

| DFM-B with recirculating ball bearing guide KF, cushioning YSRW |          |      |       |       |       |       |
|-----------------------------------------------------------------|----------|------|-------|-------|-------|-------|
| Stroke<br>[mm]                                                  | Piston Ø |      |       |       |       |       |
|                                                                 | 20       | 25   | 32    | 40    | 50    | 63    |
| Product weight [g]                                              |          |      |       |       |       |       |
| 20                                                              | 1684     | 2641 | 3717  | –     | –     | –     |
| 25                                                              | 1733     | 2707 | 3801  | 4995  | 7594  | 10816 |
| 30                                                              | 1780     | 2773 | 3884  | –     | –     | –     |
| 40                                                              | 1874     | 2903 | 4053  | –     | –     | –     |
| 50                                                              | 1970     | 3035 | 4222  | 5455  | 8275  | 11657 |
| 80                                                              | 2257     | 3429 | 4720  | 5999  | 9092  | 12629 |
| 100                                                             | 2444     | 3687 | 5047  | 6352  | 9614  | 13298 |
| 125                                                             | 2677     | 4008 | 5458  | 6801  | 10294 | 14137 |
| 160                                                             | 3015     | 4473 | 6050  | 7446  | 11255 | 15319 |
| 200                                                             | 3401     | 5004 | 6728  | 8183  | 12354 | 16670 |
| 250                                                             | 3855     | 5641 | 7545  | 9074  | 13700 | 18340 |
| 320                                                             | 4530     | 6569 | 8730  | 10363 | 15623 | 20704 |
| 400                                                             | 5302     | 7631 | 10085 | 11837 | 17821 | 23405 |
| Moving mass [g]                                                 |          |      |       |       |       |       |
| 20                                                              | 874      | 1323 | 1933  | –     | –     | –     |
| 25                                                              | 894      | 1350 | 1969  | 2386  | 3735  | 4996  |
| 30                                                              | 914      | 1378 | 2005  | –     | –     | –     |
| 40                                                              | 953      | 1432 | 2077  | –     | –     | –     |
| 50                                                              | 993      | 1487 | 2149  | 2566  | 4021  | 5282  |
| 80                                                              | 1111     | 1650 | 2365  | 2782  | 4365  | 5625  |
| 100                                                             | 1190     | 1759 | 2509  | 2926  | 4594  | 5855  |
| 125                                                             | 1289     | 1896 | 2690  | 3106  | 4880  | 6141  |
| 160                                                             | 1427     | 2087 | 2942  | 3359  | 5281  | 6542  |
| 200                                                             | 1585     | 2305 | 3230  | 3647  | 5739  | 7000  |
| 250                                                             | 1782     | 2578 | 3590  | 4007  | 6312  | 7572  |
| 320                                                             | 2059     | 2959 | 4095  | 4512  | 7114  | 8374  |
| 400                                                             | 2375     | 3396 | 4671  | 5088  | 8030  | 9290  |


## Datasheet

| <b>Materials</b>                             |                                             |                                                 |                                  |
|----------------------------------------------|---------------------------------------------|-------------------------------------------------|----------------------------------|
| Guided drive                                 | Plain-bearing guide GF                      | Recirculating ball bearing guide KF             | S6                               |
| Housing                                      | Anodised wrought aluminium alloy            | Anodised wrought aluminium alloy                | Anodised wrought aluminium alloy |
| Yoke plate                                   | Tempered steel                              | Tempered steel                                  | Wrought aluminium alloy          |
| Bearing and end caps                         | Anodised wrought aluminium alloy            | Anodised wrought aluminium alloy                | Anodised wrought aluminium alloy |
| Piston rod                                   | High-alloy stainless steel                  | High-alloy stainless steel                      | High-alloy stainless steel       |
| Guide rods                                   | High-alloy steel                            | Quenched and tempered steel, hard-chrome plated | High-alloy steel                 |
| Static seals                                 | Nitrile rubber                              | Nitrile rubber                                  | Fluoro rubber                    |
| Dynamic seals                                | Polyurethane                                | Polyurethane                                    | Fluoro rubber                    |
| Note on materials                            | RoHS-compliant                              |                                                 |                                  |
| LABS (PWIS) conformity                       | VDMA24364-B1/B2-L                           |                                                 |                                  |
| CE marking (see declaration of conformity)   | To EU Explosion Protection Directive (ATEX) |                                                 |                                  |
| UKCA marking (see declaration of conformity) | To UK explosion regulations                 |                                                 |                                  |

# Datasheet

## Maximum payload F [N]

Plain-bearing guide GF and recirculating ball bearing guide KF



[1] Centre of gravity of payload

| Piston ø | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
|----------|----|----|----|----|----|----|----|----|
| XS [mm]  | 25 | 50 | 50 | 50 | 50 | 50 | 50 | 50 |

| Stroke [mm] |    | Piston ø |    |     |     |     |     |     |     |
|-------------|----|----------|----|-----|-----|-----|-----|-----|-----|
|             |    | 12       | 16 | 20  | 25  | 32  | 40  | 50  | 63  |
| 10          | GF | 53       | 95 | –   | –   | –   | –   | –   | –   |
|             | KF | 47       | 75 | –   | –   | –   | –   | –   | –   |
| 20          | GF | 47       | 86 | 99  | 121 | 188 | –   | –   | –   |
|             | KF | 42       | 69 | 80  | 88  | 120 | –   | –   | –   |
| 25          | GF | 45       | 83 | 96  | 116 | 180 | 180 | 257 | 257 |
|             | KF | 40       | 66 | 77  | 86  | 118 | 118 | 182 | 182 |
| 30          | GF | 43       | 79 | 92  | 112 | 173 | –   | –   | –   |
|             | KF | 38       | 64 | 75  | 84  | 116 | –   | –   | –   |
| 40          | GF | 39       | 73 | 110 | 123 | 161 | –   | –   | –   |
|             | KF | 35       | 58 | 91  | 100 | 112 | –   | –   | –   |
| 50          | GF | 36       | 67 | 103 | 115 | 150 | 150 | 216 | 216 |
|             | KF | 32       | 56 | 88  | 97  | 109 | 109 | 168 | 168 |
| 80          | GF | 28       | 55 | 86  | 96  | 166 | 166 | 234 | 234 |
|             | KF | 26       | 51 | 80  | 89  | 134 | 134 | 201 | 201 |
| 100         | GF | 25       | 49 | 77  | 86  | 150 | 150 | 212 | 212 |
|             | KF | 23       | 48 | 75  | 85  | 128 | 128 | 193 | 193 |
| 125         | GF | 23       | 37 | 71  | 86  | 168 | 168 | 229 | 229 |
|             | KF | 20       | 30 | 65  | 80  | 144 | 144 | 211 | 211 |
| 160         | GF | 20       | 30 | 63  | 76  | 146 | 146 | 200 | 200 |
|             | KF | 16       | 21 | 56  | 66  | 135 | 135 | 199 | 199 |
| 200         | GF | 15       | 25 | 55  | 67  | 127 | 127 | 174 | 174 |
|             | KF | 13       | 17 | 47  | 56  | 126 | 126 | 188 | 188 |
| 250         | GF | –        | –  | 47  | 53  | 106 | 106 | 145 | 145 |
|             | KF | –        | –  | 40  | 46  | 135 | 135 | 179 | 179 |
| 320         | GF | –        | –  | 41  | 45  | 91  | 91  | 124 | 124 |
|             | KF | –        | –  | 34  | 38  | 125 | 125 | 158 | 158 |
| 400         | GF | –        | –  | 35  | 39  | 78  | 78  | 105 | 105 |
|             | KF | –        | –  | 29  | 32  | 100 | 100 | 130 | 130 |



### Note


Engineering tool

→ [www.festo.com/engineeringtools](http://www.festo.com/engineeringtools)

## Datasheet

Permissible torque load  $M$  [Nm]


Plain-bearing guide GF and recirculating ball bearing guide KF



| Stroke<br>[mm] |    | Piston ø |      |      |      |      |      |       |       |
|----------------|----|----------|------|------|------|------|------|-------|-------|
|                |    | 12       | 16   | 20   | 25   | 32   | 40   | 50    | 63    |
| 10             | GF | 1.09     | 2.19 | –    | –    | –    | –    | –     | –     |
|                | KF | 0.96     | 1.73 | –    | –    | –    | –    | –     | –     |
| 20             | GF | 0.96     | 1.98 | 2.87 | 4.15 | 7.30 | –    | –     | –     |
|                | KF | 0.86     | 1.59 | 2.32 | 3.00 | 4.70 | –    | –     | –     |
| 25             | GF | 0.92     | 1.91 | 2.78 | 3.95 | 7.00 | 7.90 | 14.15 | 15.90 |
|                | KF | 0.82     | 1.52 | 2.23 | 2.92 | 4.60 | 5.20 | 10.00 | 11.30 |
| 30             | GF | 0.88     | 1.82 | 2.67 | 3.80 | 6.70 | –    | –     | –     |
|                | KF | 0.78     | 1.47 | 2.18 | 2.85 | 4.55 | –    | –     | –     |
| 40             | GF | 0.80     | 1.68 | 3.19 | 4.20 | 6.20 | –    | –     | –     |
|                | KF | 0.72     | 1.33 | 2.64 | 3.40 | 4.40 | –    | –     | –     |
| 50             | GF | 0.74     | 1.54 | 2.99 | 3.90 | 5.80 | 6.55 | 11.85 | 13.30 |
|                | KF | 0.66     | 1.29 | 2.55 | 3.30 | 4.25 | 4.80 | 9.30  | 10.50 |
| 80             | GF | 0.57     | 1.27 | 2.49 | 3.25 | 6.40 | 7.25 | 12.85 | 14.45 |
|                | KF | 0.53     | 1.17 | 2.32 | 3.02 | 5.25 | 5.90 | 11.00 | 12.50 |
| 100            | GF | 0.51     | 1.13 | 2.23 | 2.90 | 5.80 | 6.55 | 11.65 | 13.10 |
|                | KF | 0.47     | 1.10 | 2.18 | 2.89 | 5.00 | 5.65 | 10.60 | 12.00 |
| 125            | GF | 0.47     | 0.85 | 2.06 | 2.90 | 6.50 | 7.35 | 12.55 | 14.10 |
|                | KF | 0.41     | 0.69 | 1.89 | 2.70 | 5.60 | 6.35 | 11.60 | 13.20 |
| 160            | GF | 0.41     | 0.69 | 1.83 | 2.60 | 5.70 | 6.40 | 11.00 | 12.30 |
|                | KF | 0.33     | 0.48 | 1.62 | 2.20 | 5.25 | 5.95 | 11.00 | 12.40 |
| 200            | GF | 0.31     | 0.58 | 1.60 | 2.30 | 5.00 | 5.55 | 9.60  | 10.70 |
|                | KF | 0.27     | 0.39 | 1.36 | 1.90 | 4.90 | 5.55 | 10.30 | 11.70 |
| 250            | GF | –        | –    | 1.36 | 1.80 | 4.10 | 4.60 | 7.98  | 9.06  |
|                | KF | –        | –    | 1.16 | 1.50 | 5.20 | 5.95 | 9.82  | 11.16 |
| 320            | GF | –        | –    | 1.19 | 1.50 | 3.50 | 4.00 | 6.82  | 7.75  |
|                | KF | –        | –    | 0.99 | 1.30 | 4.80 | 5.50 | 8.67  | 9.85  |
| 400            | GF | –        | –    | 1.02 | 1.30 | 3.00 | 3.40 | 5.78  | 6.56  |
|                | KF | –        | –    | 0.84 | 1.10 | 3.90 | 4.40 | 7.17  | 8.15  |

Torsional backlash  $\rho$ 

Plain-bearing guide GF and recirculating ball bearing guide KF in retracted state, unloaded




| Piston ø                       |    | 12    | 16    | 20    | 25    | 32    | 40    | 50    | 63    |
|--------------------------------|----|-------|-------|-------|-------|-------|-------|-------|-------|
| Average torsional backlash [°] | GF | ±0.03 | ±0.04 | ±0.03 | ±0.02 | ±0.03 | ±0.02 | ±0.02 | ±0.02 |
| Torsional backlash [°]         | KF | ±0.03 | ±0.02 | ±0.02 | ±0.02 | ±0.01 | ±0.01 | ±0.02 | ±0.02 |

# Datasheet

## Deflection of the end plate

Average deflection  $f_1$  due to bearing clearance as a function of stroke  $l$  (with no load)

DFM-GF with 2 bearings per guide rod




$$f = f_1 + f_2$$

$f$  = total deflection of the end plate




$f_1$  = deflection due to average bearing clearance  
with production tolerance  $\pm 0.01$  mm

$f_2$  = deflection due to transverse force



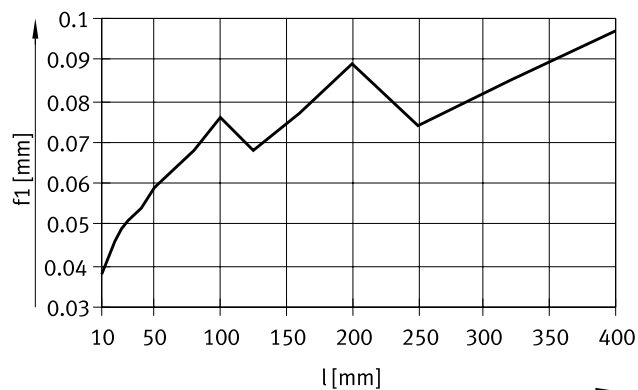


Deflection  $f_2$  due to transverse force  $F$  as a function of the stroke with plain-bearing guide GF

Stroke 50 mm

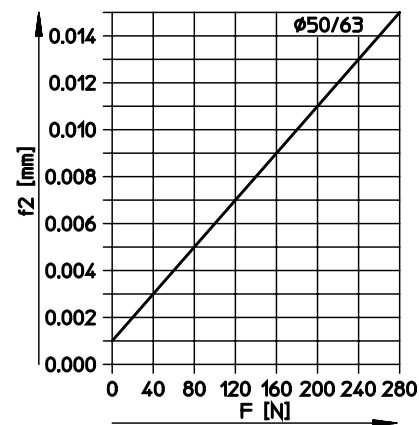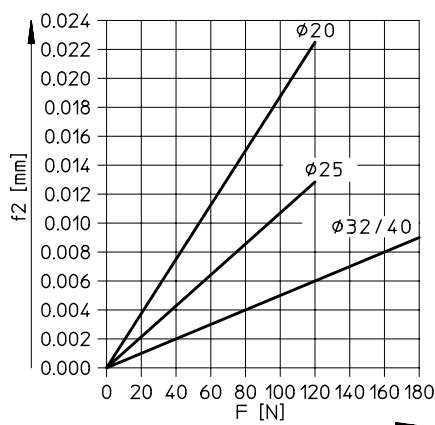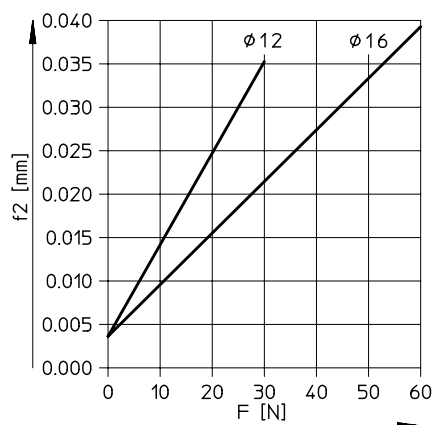

100 mm stroke

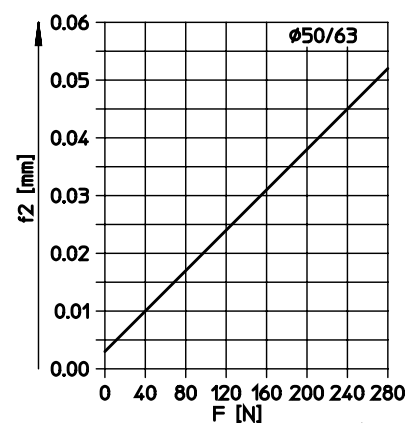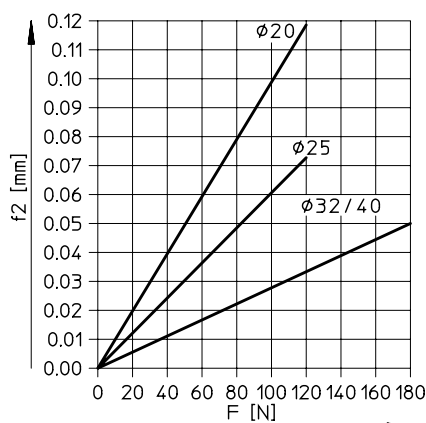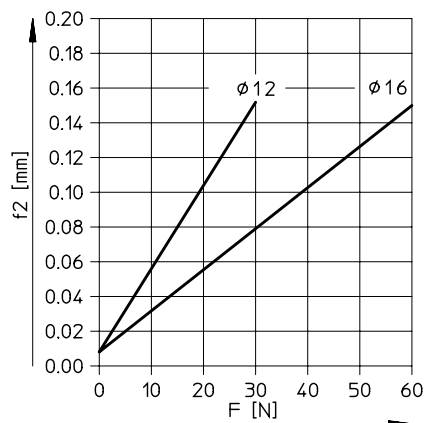


# Datasheet

## Deflection of the end plate

Average deflection  $f_1$  due to bearing clearance as a function of stroke  $l$  (with no load)

DFM-GF with 2 bearings per guide rod




$$f = f_1 + f_2$$

$f$  = total deflection of the end plate




$f_1$  = deflection due to average bearing clearance  
with production tolerance  $\pm 0.01$  mm

$f_2$  = deflection due to transverse force


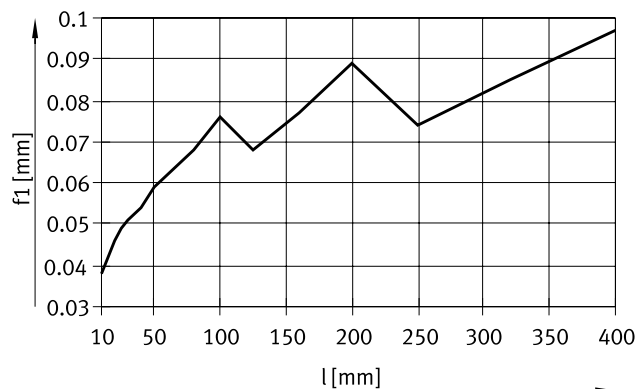


Deflection  $f_2$  due to transverse force  $F$  as a function of the stroke with plain-bearing guide GF

200 mm stroke

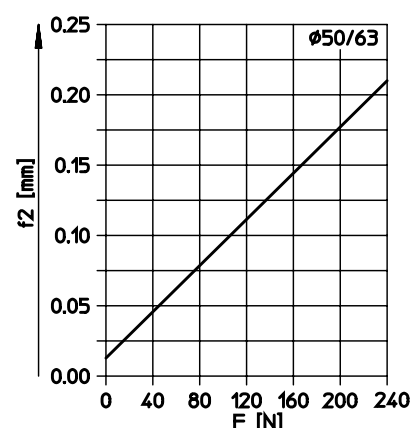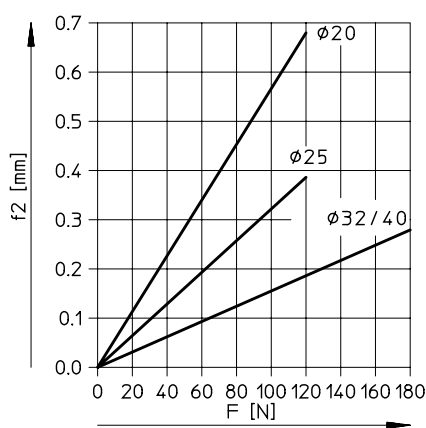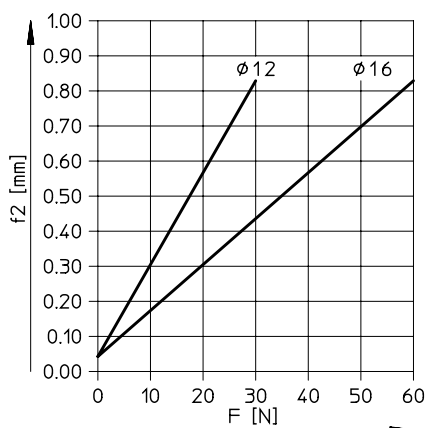

400 mm stroke

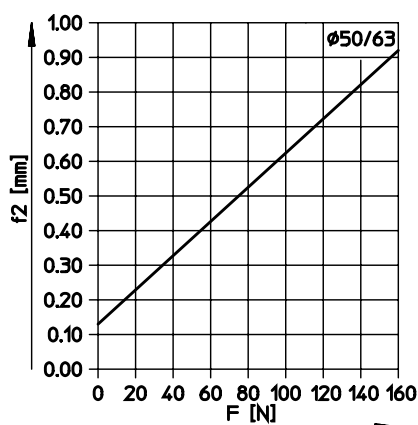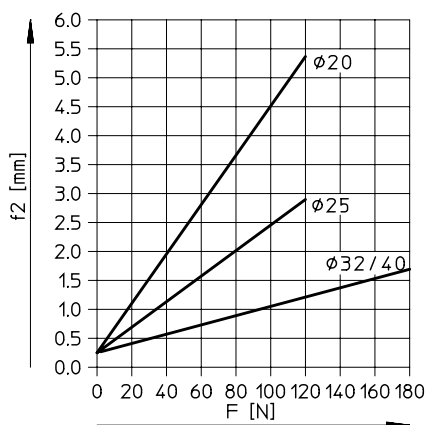


## Datasheet

### Deflection of the end plate

Deflection  $f_1$  due to bearing clearance as a function of stroke  $l$  (with no load)

DFM-KF with 2 bearings per guide rod




$$f = f_1 + f_2$$

$f$  = total deflection of the end plate




$f_1$  = deflection due to average bearing clearance  
with production tolerance  $\pm 0.01$  mm

$f_2$  = deflection due to transverse force



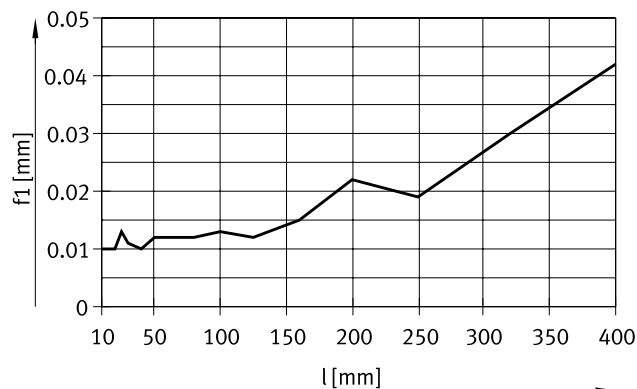


Deflection  $f_2$  due to transverse force  $F$  as a function of the stroke with recirculating ball bearing guide KF

Stroke 50 mm

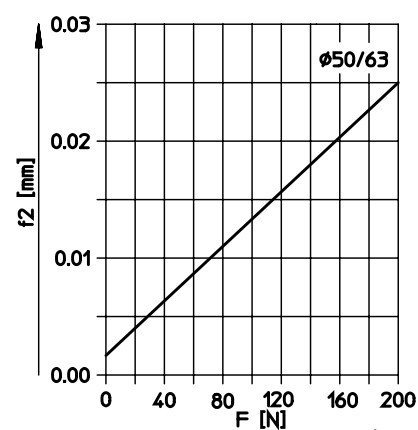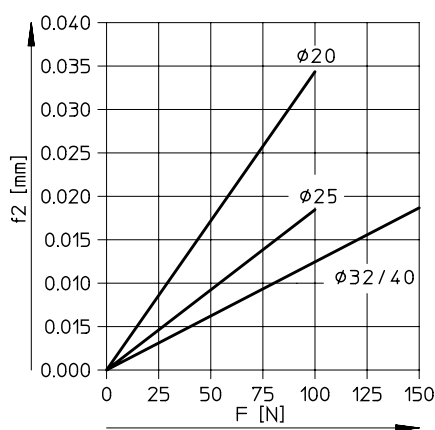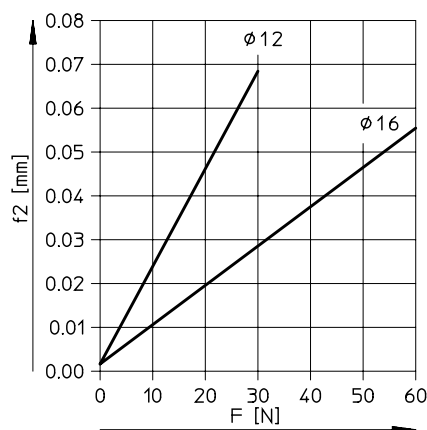

100 mm stroke

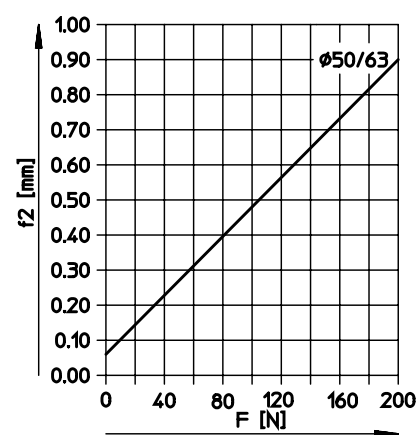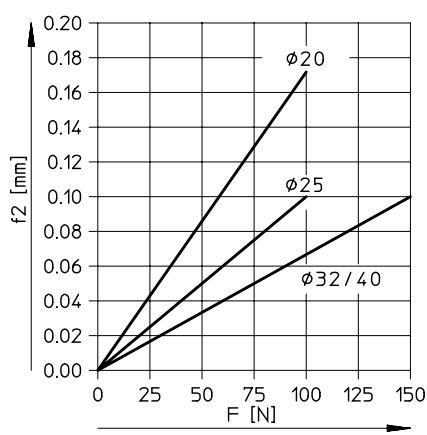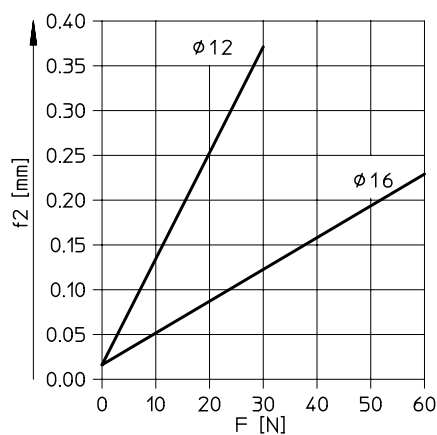


# Datasheet

## Deflection of the end plate

Deflection  $f_1$  due to bearing clearance as a function of stroke  $l$  (with no load)

DFM-KF with 2 bearings per guide rod




$$f = f_1 + f_2$$

$f$  = total deflection of the end plate




$f_1$  = deflection due to average bearing clearance  
with production tolerance  $\pm 0.01$  mm

$f_2$  = deflection due to transverse force


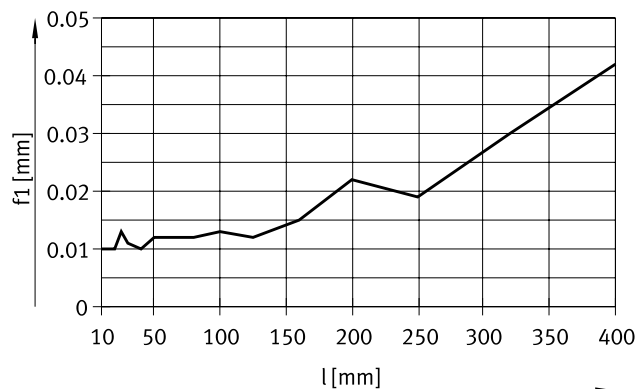


Deflection  $f_2$  due to transverse force  $F$  as a function of the stroke with recirculating ball bearing guide KF

200 mm stroke

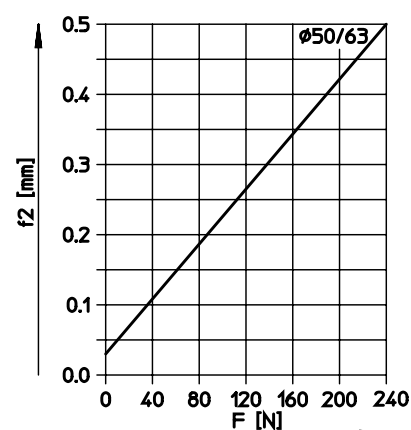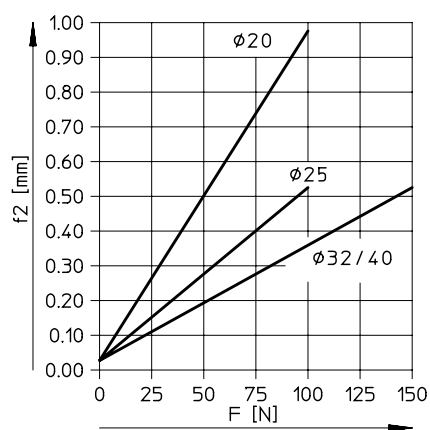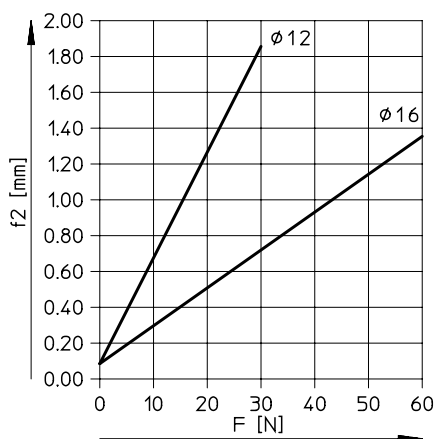


400 mm stroke

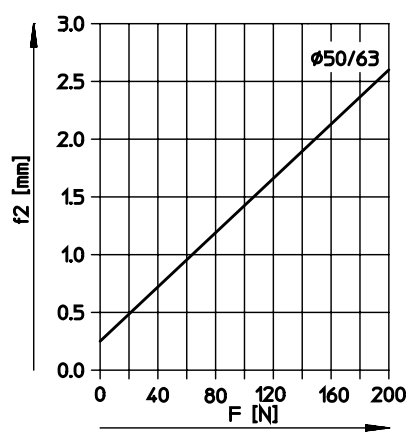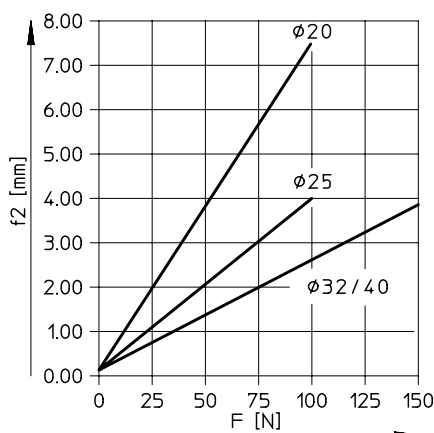

## Datasheet

## Use as a lifting cylinder

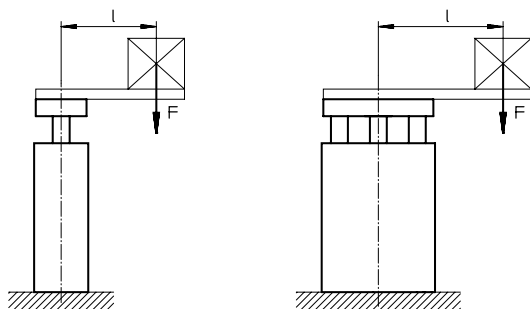

Permissible eccentric load at 0.6 MPa (6 bar, 87 psi):

| Piston $\varnothing$ | 12 | 16 | 20 | 25  | 32  | 40  | 50  | 63  |
|----------------------|----|----|----|-----|-----|-----|-----|-----|
| Load [N]             | 27 | 48 | 85 | 133 | 241 | 415 | 648 | 935 |

Permissible eccentric load at a different pressure:

| Piston $\varnothing$ | 12              | 16 | 20 | 25              | 32 | 40 | 50              | 63 |
|----------------------|-----------------|----|----|-----------------|----|----|-----------------|----|
| Load [%]             | $\leq 40^{(1)}$ |    |    | $\leq 50^{(1)}$ |    |    | $\leq 60^{(1)}$ |    |

1) The theoretical transverse force at the corresponding pressure



## Note


F = longitudinal force [N]

l = lever arm [mm]


Additional graphs  
→ from page 16

## Permissible load with plain-bearing guide GF

Stroke 40 ... 400 mm

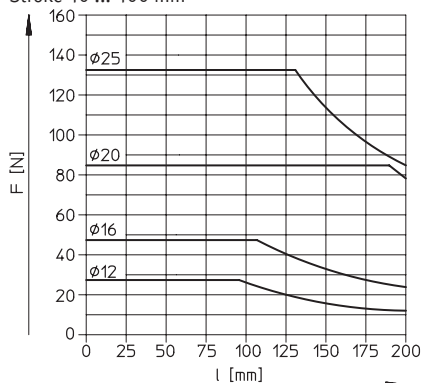


Stroke 250 ... 400 mm

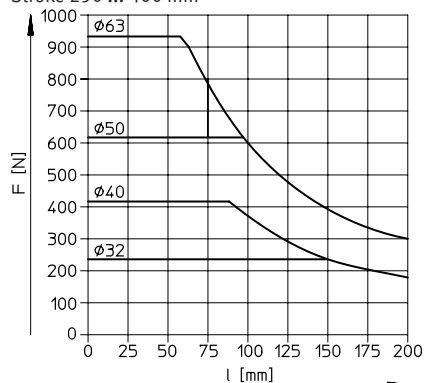


## Permissible load with recirculating ball bearing guide KF


Stroke 40 ... 100 mm

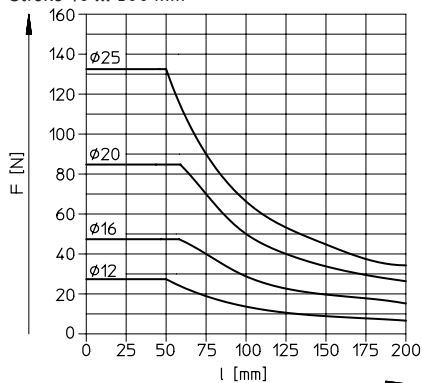


Stroke 125 ... 200 mm

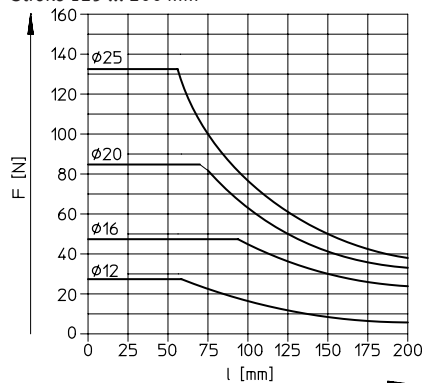

Stroke 250 ... 400 mm

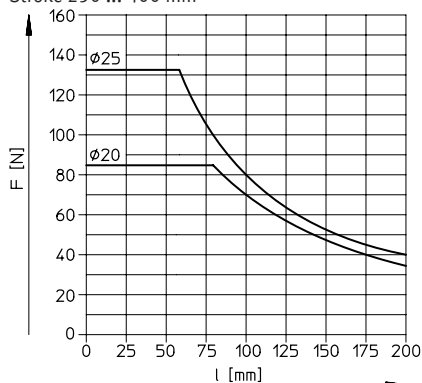

Stroke 200 ... 400 mm

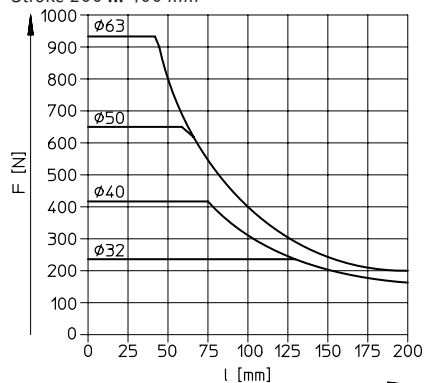


# Datasheet


## Permissible load mass $m$ as a function of the permissible speed $v$

Horizontal operation, cushioning YSRW


DFM-20-...-B-YSRW

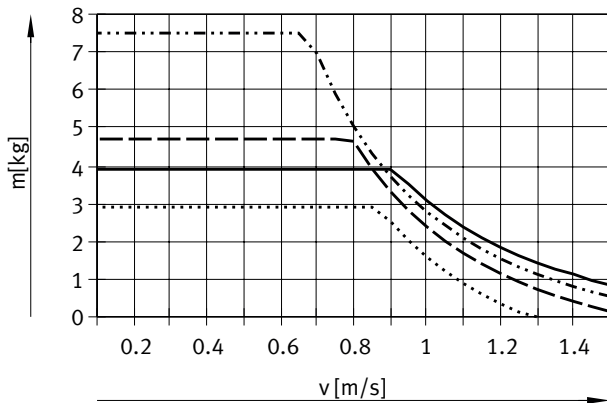


DFM-25-...-B-YSRW

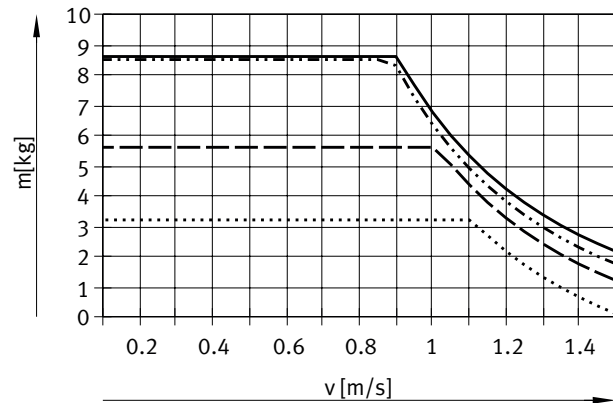


DFM-32-...-B-YSRW

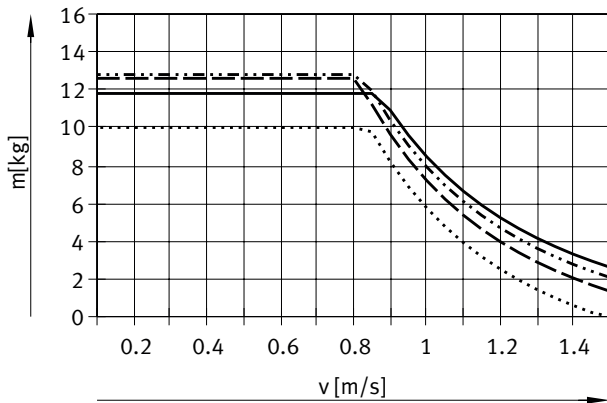


DFM-40-...-B-YSRW

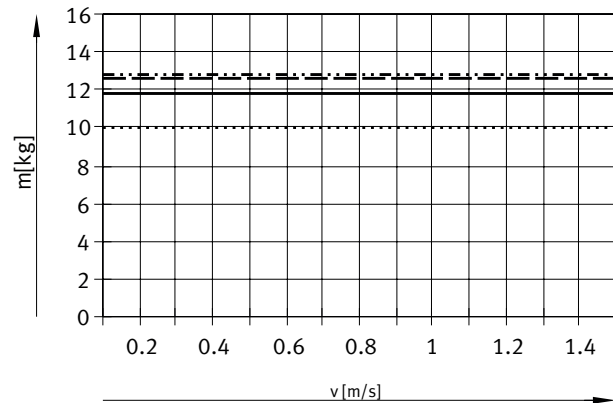

DFM-50-...-B-YSRW

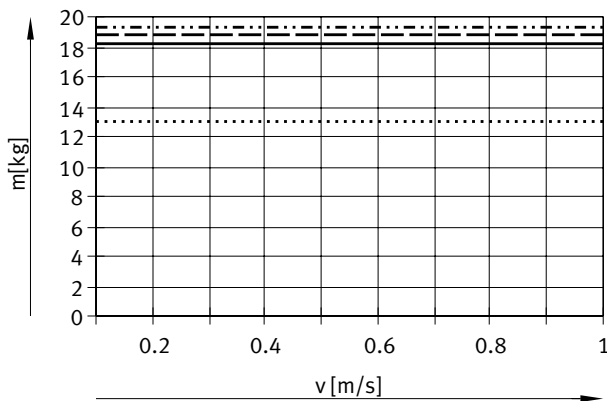

DFM-63-...-B-YSRW

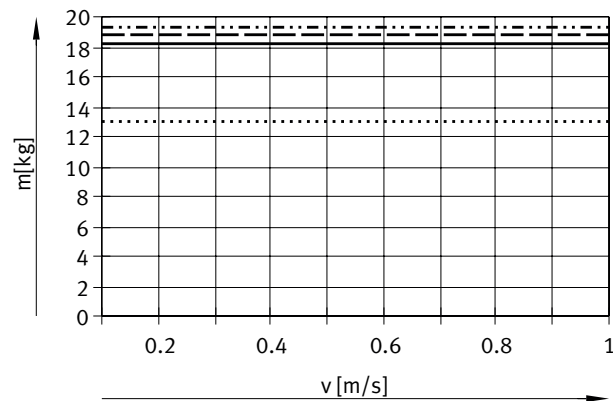


- Stroke 25 mm
- · - · - Stroke 100 mm
- - - - - Stroke 200 mm
- ..... Stroke 400 mm

## Datasheet


Permissible load mass  $m$  as a function of the permissible speed  $v$ 

Vertical operation, cushioning YSRW


DFM-20-...-B-YSRW

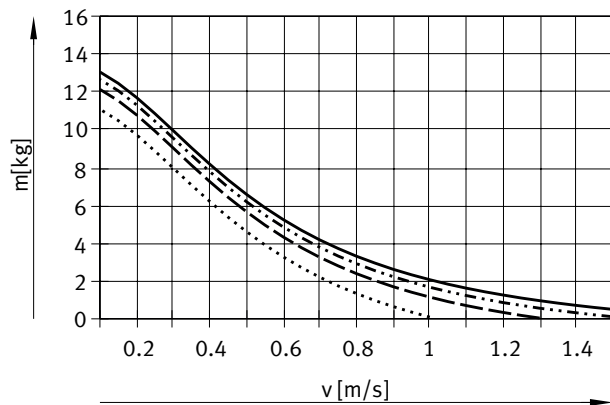


DFM-25-...-B-YSRW

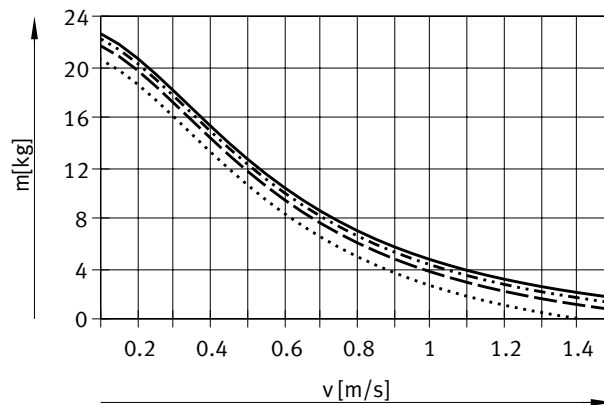


DFM-32-...-B-YSRW

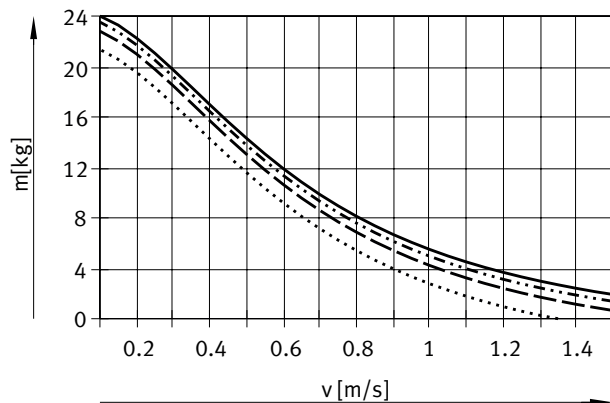


DFM-40-...-B-YSRW

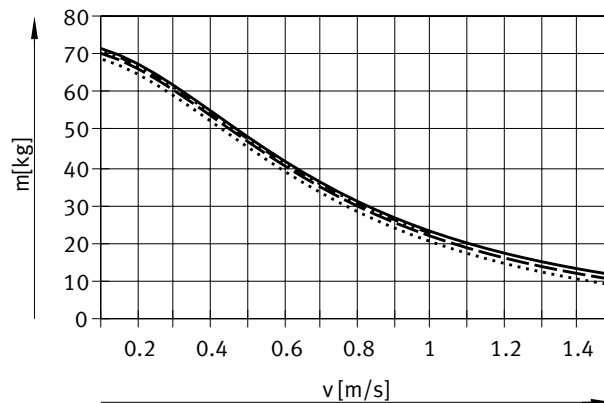

DFM-50-...-B-YSRW

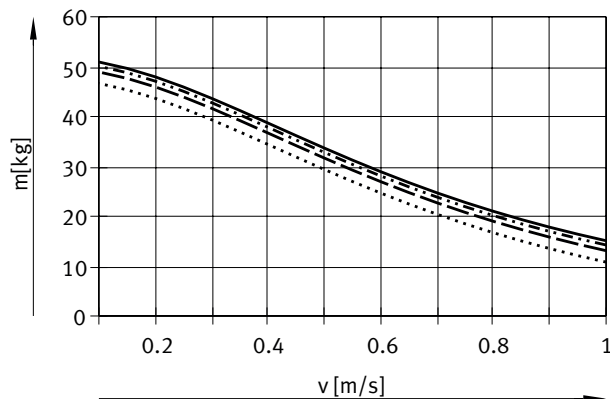

DFM-63-...-B-YSRW

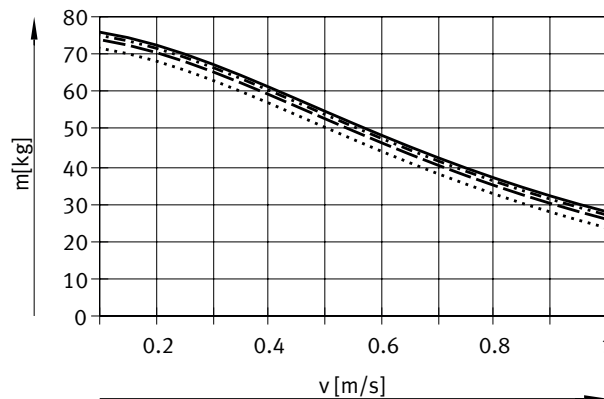


- Stroke 25 mm
- · - · - Stroke 100 mm
- - - Stroke 200 mm
- Stroke 400 mm

# Datasheet

## Dimensions

Ø 12, 16 mm

Download CAD data → [www.festo.com](http://www.festo.com)

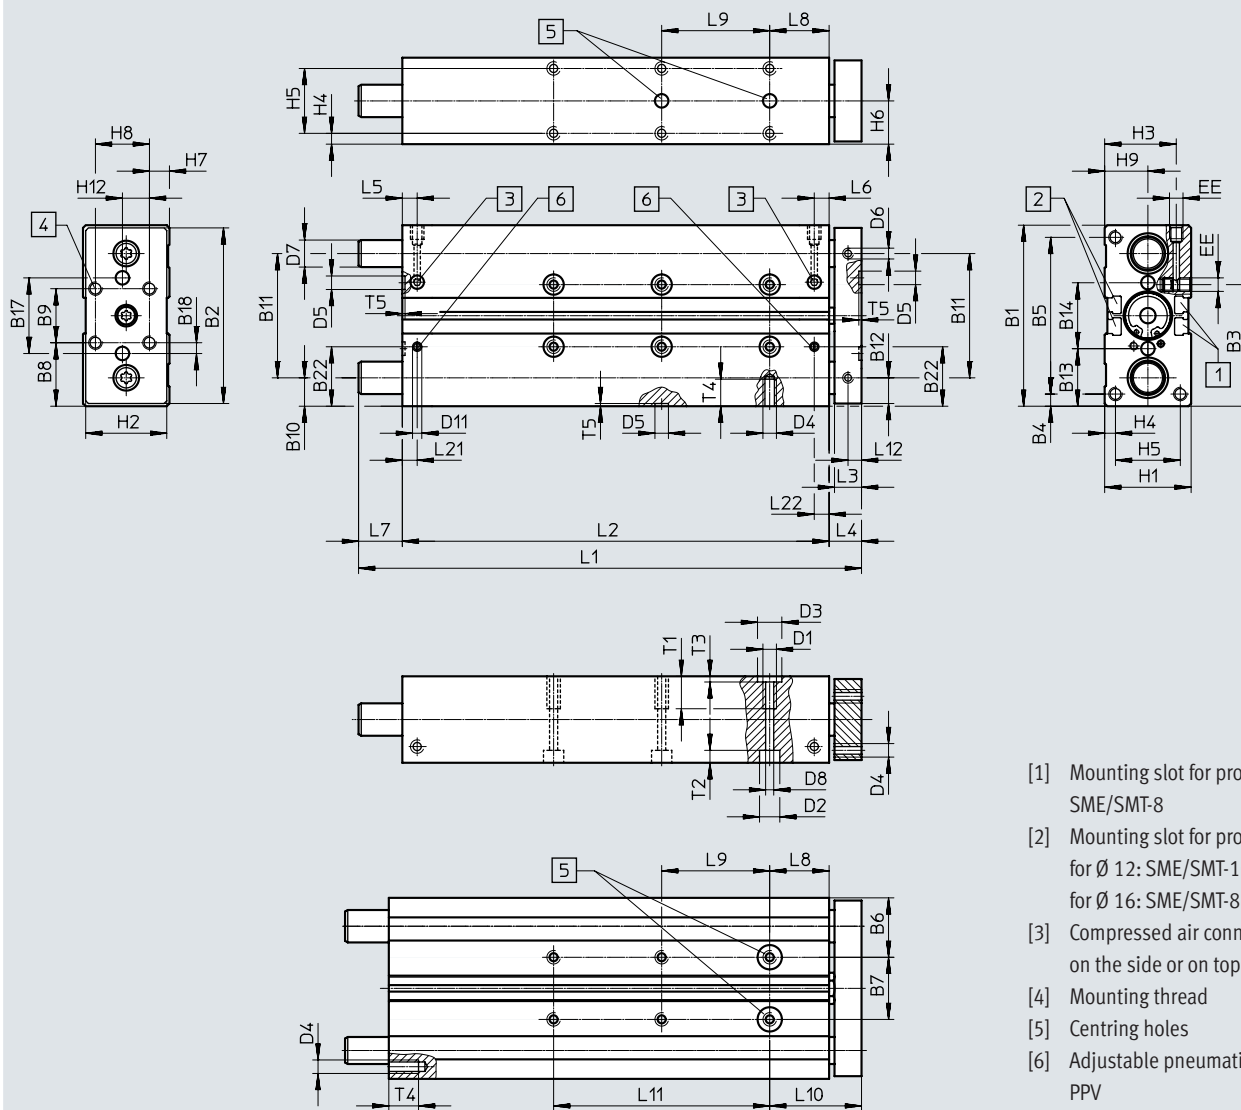

- [1] Mounting slot for proximity switch SME/SMT-8
- [2] Mounting slot for proximity switch:  
for Ø 12: SME/SMT-10  
for Ø 16: SME/SMT-8
- [3] Compressed air connection can be  
on the side or on top
- [4] Mounting thread
- [5] Centring holes
- [6] Adjustable pneumatic cushioning  
PPV

| Ø    | B1 | B2 | B3 | B4  | B5 | B6   | B7                  | B8   | B9 | B10  | B11 | B12 | B13  | B14                 | B17 | B18 | B22  |
|------|----|----|----|-----|----|------|---------------------|------|----|------|-----|-----|------|---------------------|-----|-----|------|
| [mm] |    |    |    |     |    |      | ±0.02 <sup>1)</sup> |      |    |      |     |     |      | ±0.02 <sup>1)</sup> |     |     |      |
| 12   | 60 | 58 | 41 | 4.5 | 51 | 20.5 | 19                  | 20   | 20 | 9.5  | 41  | 8.5 | 19.5 | 21                  | 25  | 2.5 | –    |
| 16   | 67 | 65 | 45 | 4.5 | 58 | 22   | 23                  | 23.5 | 20 | 10.5 | 46  | 9.5 | 21.3 | 24.4                | 28  | 4   | 22.5 |

1) Tolerance between the centring holes

| Ø    | D1 | D2  | D3 | D4 | D5 | D6 | D7               |                  | D8  | D11 | EE | H1 | H2 | H3   | H4 | H5 | H6 |
|------|----|-----|----|----|----|----|------------------|------------------|-----|-----|----|----|----|------|----|----|----|
| [mm] |    | Ø   | Ø  |    | Ø  | Ø  | Ø                |                  | Ø   | Ø   |    |    |    |      |    |    |    |
|      |    |     | H8 |    | H8 |    | GF               | KF               | H8  |     |    |    |    |      |    |    |    |
| 12   | M5 | 8   | 9  | M4 | 5  | M4 | 10 <sub>h8</sub> | 8 <sub>h6</sub>  | 4.3 | –   | M5 | 28 | 26 | 24   | 4  | 20 | 14 |
| 16   | M5 | 7.5 | 9  | M5 | 5  | M4 | 12 <sub>h8</sub> | 10 <sub>h6</sub> | 4.3 | 3.3 | M5 | 32 | 30 | 26.5 | 4  | 24 | 16 |

| Ø    | H7  | H8 | H9 | H12 | L3 | L4 | L5   | L6   | L8 | L10 | L12 | L21 | L22 | T1 | T2  | T3  | T4 | T5  |
|------|-----|----|----|-----|----|----|------|------|----|-----|-----|-----|-----|----|-----|-----|----|-----|
| [mm] |     |    |    |     |    |    |      |      |    |     |     |     |     |    |     |     |    |     |
| 12   | 4   | 20 | 14 | 10  | 10 | 13 | 14.6 | 10.8 | 21 | 34  | 5   | –   | –   | 10 | 9.4 | 2.1 | 8  | 1.2 |
| 16   | 7.4 | 20 | 16 | 10  | 10 | 12 | 9.8  | 9.3  | 22 | 34  | 5   | 9.8 | 9.3 | 12 | 4.6 | 2.1 | 10 | 1.2 |

## Datasheet

| Stroke<br>[mm] | Piston Ø [mm] |     |    |                           |     |     |     |    |                           |     |
|----------------|---------------|-----|----|---------------------------|-----|-----|-----|----|---------------------------|-----|
|                | 12            |     |    |                           |     | 16  |     |    |                           |     |
|                | L1            | L2  | L7 | L9<br>±0.02 <sup>1)</sup> | L11 | L1  | L2  | L7 | L9<br>±0.02 <sup>1)</sup> | L11 |
| 10             | 74            | 50  | 11 | –                         | –   | 80  | 68  | –  | –                         | –   |
| 20             | 84            | 60  | 11 | –                         | –   | 90  | 78  | –  | –                         | –   |
| 25             | 89            | 65  | 11 | 20                        | –   | 95  | 83  | –  | 20                        | –   |
| 30             | 94            | 70  | 11 | 20                        | –   | 100 | 88  | –  | 20                        | –   |
| 40             | 104           | 80  | 11 | 20                        | –   | 110 | 98  | –  | 20                        | –   |
| 50             | 114           | 90  | 11 | 40                        | –   | 120 | 108 | –  | 40                        | –   |
| 80             | 144           | 120 | 11 | 40                        | –   | 150 | 138 | –  | 40                        | –   |
| 100            | 164           | 140 | 11 | 40                        | 80  | 170 | 158 | –  | 40                        | 80  |
| 125            | 230           | 165 | 52 | 40                        | 80  | 229 | 183 | 34 | 40                        | 80  |
| 160            | 265           | 200 | 52 | 40                        | 120 | 264 | 218 | 34 | 40                        | 120 |
| 200            | 305           | 240 | 52 | 40                        | 160 | 304 | 258 | 34 | 40                        | 160 |

1) Tolerance between the centring holes

**Note**


If the guide rods project beyond the housing when the unit is in its retracted end position (→ dimension L7), a recess must be provided in the mounting surface if the unit is to be mounted on the end face so that the guide rods can move freely.

When using a variable stroke, dimensions L1, L2, L7, L9 and L11 correspond to the next longest standard stroke.

**Dimensions**Download CAD data → [www.festo.com](http://www.festo.com)

AJ – Precision stroke adjustment in the advanced end position

Ø 12, 16 mm

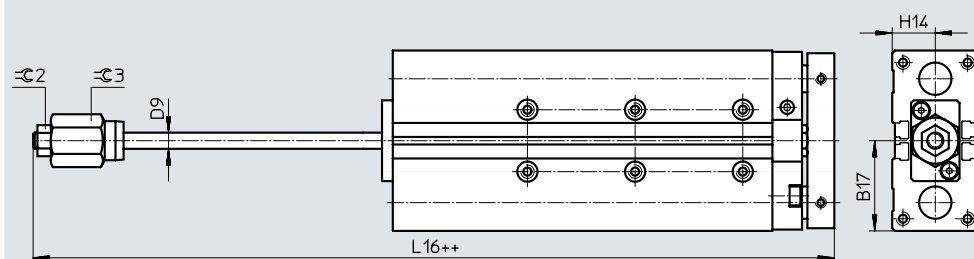


| Ø    | B17  | D9<br>Ø | H14 | L16   | Ø2 | Ø3 |
|------|------|---------|-----|-------|----|----|
| [mm] |      |         |     |       |    |    |
| 12   | 30.5 | 6       | 14  | 90.6  | 10 | 17 |
| 16   | 33.5 | 6       | 16  | 107.9 | 10 | 17 |

## Datasheet

## Dimensions

Ø 20 ... 40 mm

Download CAD data → [www.festo.com](http://www.festo.com)

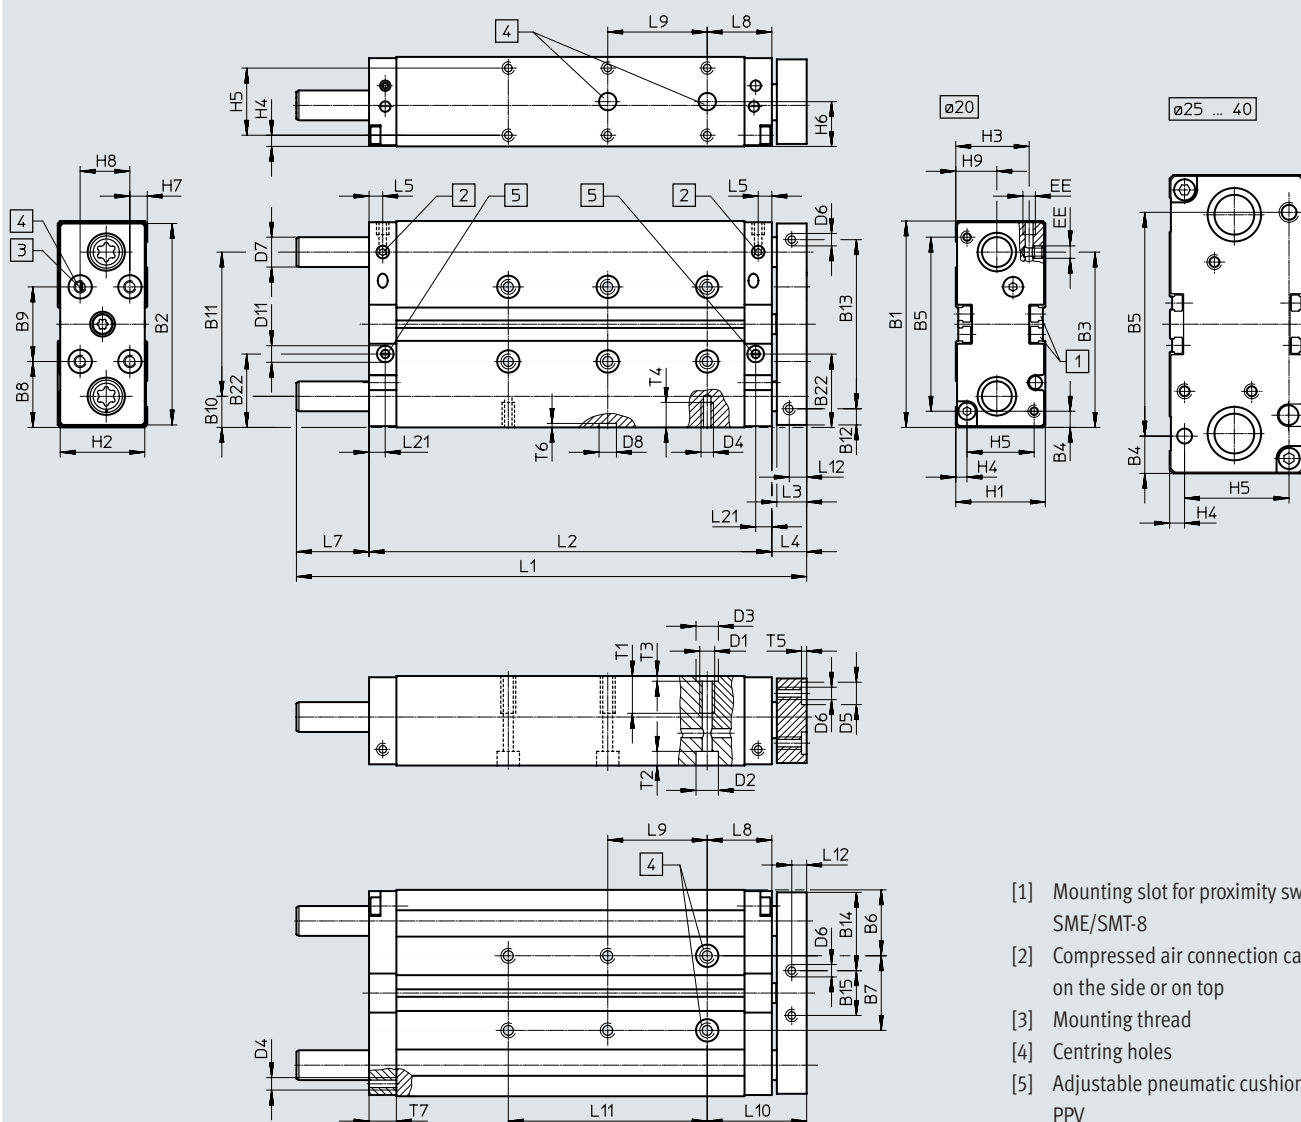

- [1] Mounting slot for proximity switch  
SME/SMT-8
- [2] Compressed air connection can be  
on the side or on top
- [3] Mounting thread
- [4] Centring holes
- [5] Adjustable pneumatic cushioning  
PPV

## Datasheet

| ∅    | B1    | B2  | B3   | B4   | B5 | B6   | B7                  | B8   | B9                  | B10  | B11 | B12  | B13 | B14  | B15 | B22  | D1 |
|------|-------|-----|------|------|----|------|---------------------|------|---------------------|------|-----|------|-----|------|-----|------|----|
| [mm] |       |     |      |      |    |      | ±0.02 <sup>1)</sup> |      | ±0.02 <sup>1)</sup> |      |     |      |     |      |     |      |    |
| 20   | 83    | 81  | 70   | 6.5  | 70 | 26.5 | 30                  | 26.5 | 30                  | 12.5 | 58  | 6.5  | 68  | 31.5 | 18  | 28   | M6 |
| 25   | 95    | 93  | 69   | 15.5 | 64 | 30   | 35                  | 27.5 | 40                  | 13.5 | 68  | 12.5 | 68  | 32.5 | 28  | 32   | M6 |
| 32   | 110   | 108 | 79.5 | 20   | 70 | 33.5 | 43                  | 35   | 40                  | 16   | 78  | 15   | 78  | 41   | 26  | 38   | M8 |
| 40   | 120.5 | 118 | 85.5 | 15   | 90 | 34.5 | 51                  | 35   | 50                  | 16   | 88  | 15   | 88  | 41   | 36  | 41.5 | M8 |

1) Tolerance between the centring holes

| ∅    | D2 | D3 | D4 | D5 | D6 | D7 |    | D8 | D11 | EE   | H1 | H2 | H3   | H4  | H5 | H6   | H7  |
|------|----|----|----|----|----|----|----|----|-----|------|----|----|------|-----|----|------|-----|
| [mm] | ∅  | ∅  |    | ∅  | ∅  | ∅  |    | ∅  | ∅   |      |    |    |      |     |    |      |     |
|      |    | H8 |    | H8 |    | GF | KF | H8 |     |      |    |    |      |     |    |      |     |
| 20   | 9  | 9  | M5 | 9  | M5 | 14 | 12 | 7  | 8.5 | M5   | 36 | 34 | 28.5 | 4.5 | 27 | 18   | 7   |
| 25   | 9  | 9  | M6 | 9  | M6 | 16 | 14 | 7  | 8.8 | G1/8 | 44 | 42 | 34   | 4.5 | 35 | 22   | 12  |
| 32   | 11 | 12 | M6 | 9  | M6 | 20 | 16 | 9  | 8.8 | G1/8 | 49 | 47 | 37   | 6   | 37 | 24.5 | 8.5 |
| 40   | 11 | 12 | M8 | 9  | M6 | 20 | 16 | 9  | 8.8 | G1/8 | 54 | 52 | 41.5 | 6   | 42 | 27   | 10  |

| ∅    | H8 | H9   | L3 | L4 | L5  | L8 | L10 | L12 | L21 | T1 | T2  | T3  | T4 | T5  | T6  | T7 |
|------|----|------|----|----|-----|----|-----|-----|-----|----|-----|-----|----|-----|-----|----|
| [mm] |    |      |    |    |     |    |     |     |     |    |     |     |    |     |     |    |
| 20   | 20 | 16.5 | 12 | 14 | 6   | 26 | 40  | 6   | 6   | 12 | 5.7 | 2.1 | 10 | 2.1 | 1.6 | 11 |
| 25   | 20 | 19   | 12 | 14 | 8.5 | 26 | 40  | 6   | 8   | 12 | 5.7 | 2.1 | 12 | 2.1 | 1.6 | 15 |
| 32   | 30 | 21   | 14 | 16 | 8.5 | 29 | 45  | 7   | 9   | 20 | 6.8 | 2.6 | 11 | 2.1 | 2.1 | 15 |
| 40   | 30 | 26   | 14 | 16 | 8.5 | 29 | 45  | 7   | 9.5 | 20 | 6.8 | 2.6 | 16 | 2.1 | 2.1 | 15 |

| Stroke<br><br>[mm] | Piston Ø [mm] |     |     |                           |     |     |     |     |                           |     |     |     |     |                           |     |     |     |     |                           |     |     |     |
|--------------------|---------------|-----|-----|---------------------------|-----|-----|-----|-----|---------------------------|-----|-----|-----|-----|---------------------------|-----|-----|-----|-----|---------------------------|-----|-----|-----|
|                    | 20            |     |     |                           |     | 25  |     |     |                           |     | 32  |     |     |                           |     | 40  |     |     |                           |     |     |     |
|                    | L1            | L2  | L7  | L9<br>±0.02 <sup>1)</sup> | L11 | L1  | L2  | L7  | L9<br>±0.02 <sup>1)</sup> | L11 | L1  | L2  | L7  | L9<br>±0.02 <sup>1)</sup> | L11 | L1  | L2  | L7  | L9<br>±0.02 <sup>1)</sup> | L11 |     |     |
| 20                 | 105           | 82  | 9   | 20                        | —   | 111 | 90  | 7   | 20                        | —   | 118 | 95  | 7   | 20                        | —   | —   | —   | —   | —                         | —   |     |     |
| 25                 | 110           | 87  |     |                           |     | 116 | 95  |     |                           |     | 123 | 100 |     |                           |     | 123 | 101 | 6   | 20                        |     |     |     |
| 30                 | 115           | 92  |     |                           |     | 121 | 100 |     |                           |     | 133 | 105 |     |                           |     | —   | —   | —   | —                         |     |     |     |
| 40                 | 135           | 102 | 19  | 20                        | —   | 141 | 110 | 17  | 20                        | —   | 143 | 115 | 12  | 20                        | —   | —   | —   | —   | —                         | —   |     |     |
| 50                 | 145           | 112 |     |                           |     | 151 | 120 |     |                           |     | 153 | 125 |     |                           |     | 153 | 126 | 11  | 36                        |     |     |     |
| 80                 | 185           | 142 |     |                           |     | 196 | 150 |     |                           |     | 208 | 155 |     |                           |     | 208 | 156 | 36  |                           |     |     |     |
| 100                | 205           | 162 | 29  | 20                        | —   | 216 | 170 | 32  | 20                        | —   | 228 | 175 | 37  | 20                        | —   | 228 | 176 |     | 66                        | 40  | 80  |     |
| 125                | 257           | 187 |     |                           |     | 271 | 195 |     |                           |     | 283 | 200 |     |                           |     | 283 | 201 |     |                           |     |     |     |
| 160                | 292           | 222 |     |                           |     | 56  | 40  | —   |                           |     | 120 | 306 | 230 |                           |     | 62  | 40  | 120 | 318                       |     |     | 235 |
| 200                | 332           | 262 | 160 | 346                       | 270 |     |     |     | 160                       | 358 | 275 | 160 | 358 | 276                       |     |     |     |     |                           |     |     |     |
| 250                | 472           | 312 | 200 | 476                       | 320 |     |     |     | 200                       | 483 | 325 | 200 | 483 | 326                       | 141 |     |     | 200 |                           |     |     |     |
| 320                | 542           | 382 | 146 | 20                        | —   | 240 | 546 | 390 | 142                       | 20  | —   | 240 | 553 | 395                       |     | 142 | 20  |     | 240                       | 553 | 396 | 240 |
| 400                | 622           | 462 |     |                           |     | 320 | 626 | 470 |                           |     |     | 320 | 633 | 475                       |     |     |     |     | 320                       | 633 | 476 |     |

1) Tolerance between the centring holes

Note: This product conforms to ISO 1179-1 and ISO 228-1.

 Note

If the guide rods project beyond the housing when the unit is in its retracted end position (→ dimension L7), a recess must be provided in the mounting surface if the unit is to be mounted on the end face so that the guide rods can move freely.

When using a variable stroke, dimensions L1, L2, L7, L9 and L11 correspond to the next longest standard stroke.


# Datasheet

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

YSRW – self-adjusting cushioning


Ø 20 ... 40 mm

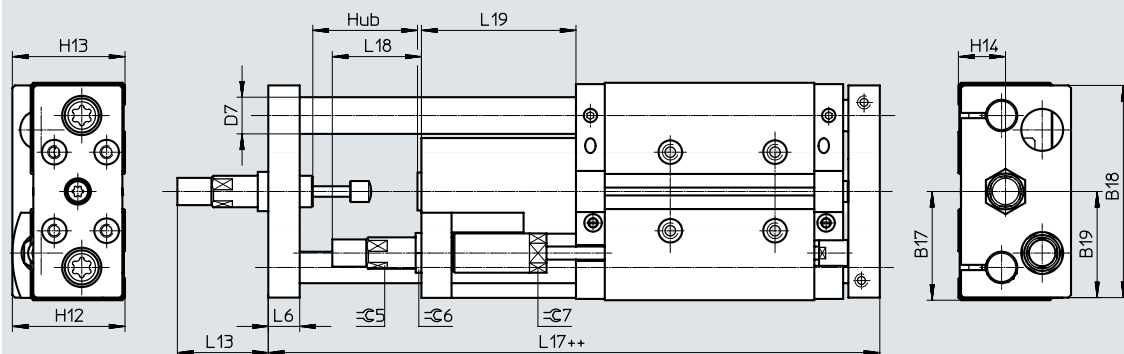

++ = plus 2x stroke length

AJ/EJ – Precision stroke adjustment in the advanced and retracted end position

Ø 20 ... 40 mm

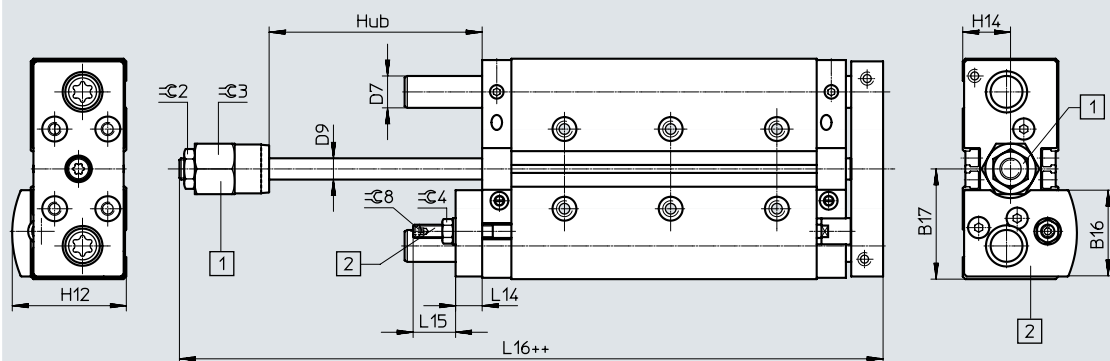

[1] Variant AJ

[2] Variant EJ

++ = plus 2x stroke length

## Datasheet

| ø<br>[mm] | B16  | B17  | B18 | B19  | D7<br>ø |    | D9<br>ø | H12  | H13  | H14  | L6 | L13  | L14 |
|-----------|------|------|-----|------|---------|----|---------|------|------|------|----|------|-----|
|           |      |      |     |      | GF      | KF |         |      |      |      |    |      |     |
| 20        | 32.5 | 41.5 | 81  | 40.5 | 14      | 12 | 8       | 43   | 43   | 18   | 12 | 36.5 | 10  |
| 25        | 38.6 | 47.5 | 90  | 45   | 16      | 14 | 10      | 49.5 | 50.5 | 22   | 14 | 43   | 12  |
| 32        | 43.4 | 55   | 105 | 52.5 | 20      | 16 | 12      | 56.5 | 56   | 24.5 | 16 | 52   | 12  |
| 40        | 46.2 | 60   | 116 | 58   | 20      | 16 | 12      | 62.5 | 63.5 | 27   | 16 | 72   | 12  |


| ø<br>[mm] | L15  | L16   | L17   | L18  | L19 | ≈G2 | ≈G3 | ≈G4 | ≈G5 | ≈G6 | ≈G7 | ≈G8 |
|-----------|------|-------|-------|------|-----|-----|-----|-----|-----|-----|-----|-----|
| 20        | 16   | 110   | 153.5 | 34   | 59  | 13  | 19  | 8   | 11  | 15  | 13  | 2.5 |
| 25        | 23.5 | 119.5 | 176.5 | 37.5 | 71  | 17  | 24  | 13  | 13  | 17  | 16  | 4   |
| 32        | 18.5 | 129.5 | 190.5 | 48.5 | 76  | 17  | 30  | 13  | 15  | 17  | 19  | 4   |
| 40        | 18.5 | 132   | 209.5 | 55.5 | 95  | 17  | 30  | 13  | 20  | 22  | 27  | 4   |

# Datasheet

## Dimensions

Ø 50 ... 63 mm

Download CAD data → [www.festo.com](http://www.festo.com)

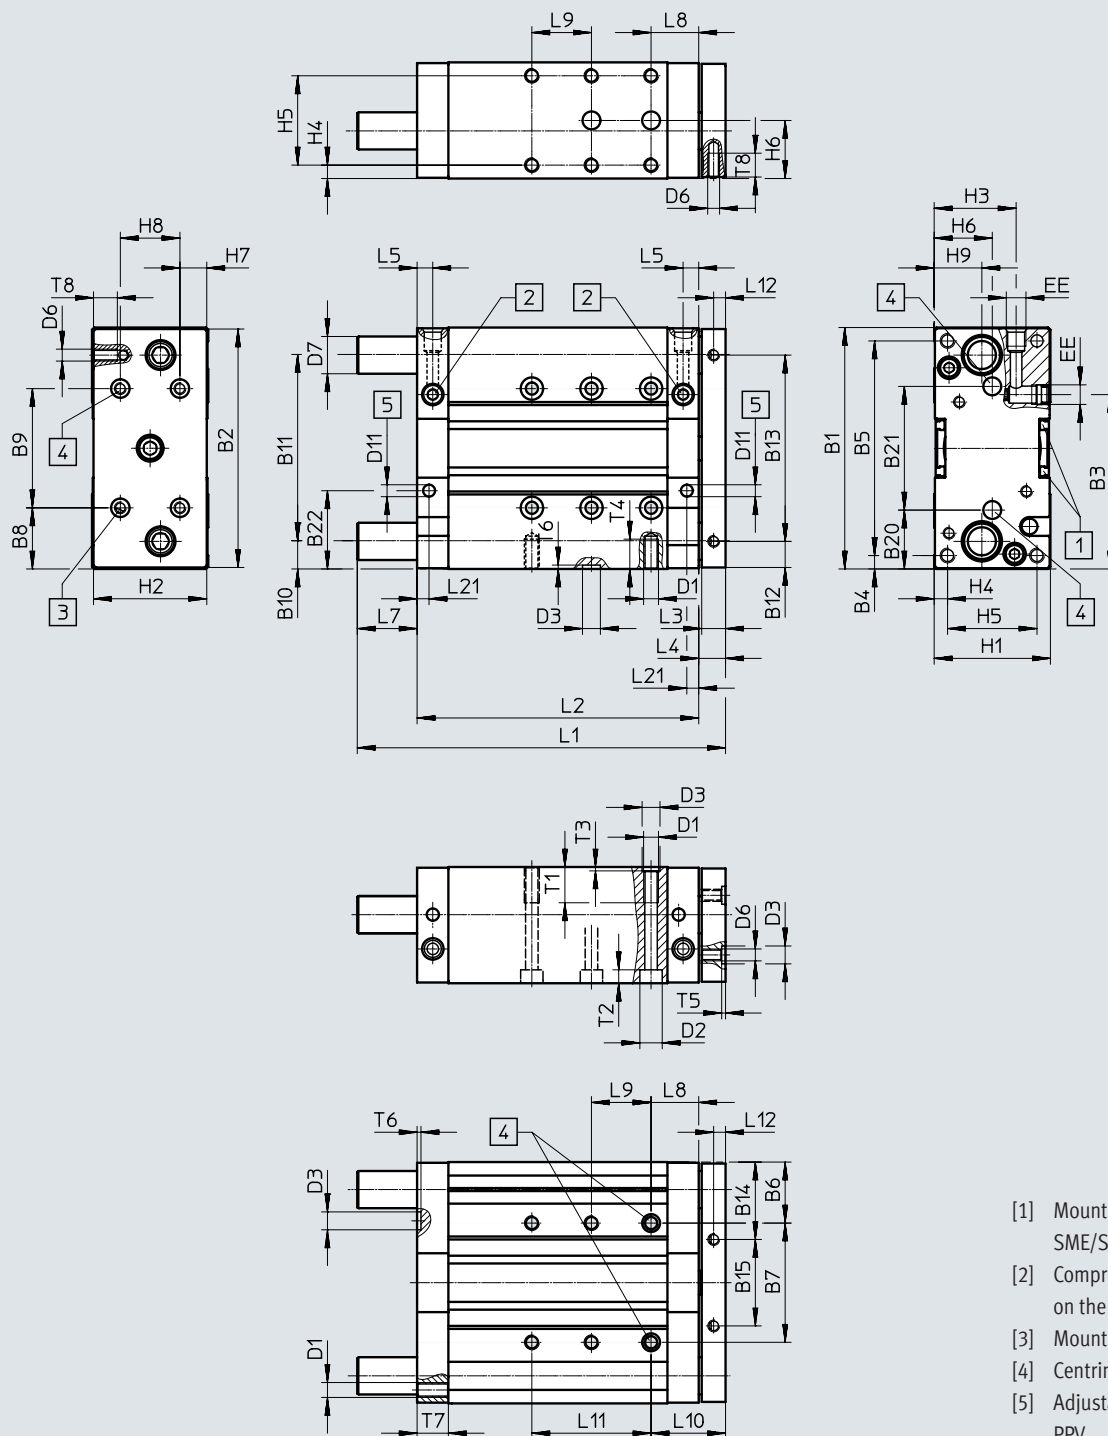

- [1] Mounting slot for proximity switch SME/SMT-8
- [2] Compressed air connection can be on the side or on top
- [3] Mounting thread
- [4] Centring holes
- [5] Adjustable pneumatic cushioning PPV

## Datasheet

| ∅    | B1  | B2  | B3    | B4 | B5  | B6 | B7                  | B8 | B9                  | B10  | B11 | B12  | B13 | B14 | B15 | B20  |
|------|-----|-----|-------|----|-----|----|---------------------|----|---------------------|------|-----|------|-----|-----|-----|------|
| [mm] |     |     |       |    |     |    | ±0.02 <sup>1)</sup> |    | ±0.02 <sup>1)</sup> |      |     |      |     |     |     |      |
| 50   | 148 | 146 | 104   | 19 | 110 | 42 | 64                  | 44 | 60                  | 19   | 110 | 18   | 110 | 52  | 42  | 40   |
| 63   | 162 | 160 | 116.5 | 9  | 144 | 41 | 80                  | 41 | 80                  | 18.5 | 125 | 17.5 | 125 | 51  | 58  | 39.5 |

| ∅    | B21                 | B22  | D1  | D2<br>∅ | D3<br>∅ | D6<br>∅ | D7<br>∅ |    | D11<br>∅ | EE   | H1 | H2 | H3   | H4 | H5 | H6 | H7 |
|------|---------------------|------|-----|---------|---------|---------|---------|----|----------|------|----|----|------|----|----|----|----|
| [mm] | ±0.02 <sup>1)</sup> |      |     |         | H8      |         | GF      | KF |          |      |    |    |      |    |    |    |    |
| 50   | 68                  | 52   | M8  | 11      | 12      | M8      | 25      | 20 | 8.8      | G1/4 | 64 | 62 | 48.5 | 7  | 50 | 32 | 12 |
| 63   | 83                  | 53.5 | M10 | 15      | 12      | M8      | 25      | 20 | 8.8      | G1/4 | 78 | 76 | 54.5 | 9  | 60 | 39 | 19 |

| ∅    | H8 | H9 | L3 | L4 | L5   | L8 | L10 | L12 | L21  | T1 | T2  | T3  | T4 | T5  | T6  | T7 | T8 |
|------|----|----|----|----|------|----|-----|-----|------|----|-----|-----|----|-----|-----|----|----|
| [mm] |    |    |    |    |      |    |     |     |      |    |     |     |    |     |     |    |    |
| 50   | 40 | 29 | 16 | 18 | 11.5 | 32 | 50  | 8   | 11.5 | 20 | 6.8 | 2.6 | 16 | 2.6 | 2.6 | 21 | 16 |
| 63   | 40 | 32 | 16 | 18 | 10.5 | 32 | 50  | 8   | 10.5 | 24 | 9   | 2.6 | 20 | 2.6 | 2.6 | 21 | 16 |

| Stroke<br>[mm] | Piston ø [mm] |     |     |                           |     |     |     |     |                           |     |    |     |
|----------------|---------------|-----|-----|---------------------------|-----|-----|-----|-----|---------------------------|-----|----|-----|
|                | 50            |     |     |                           |     | 63  |     |     |                           |     |    |     |
|                | L1            | L2  | L7  | L9<br>±0.02 <sup>1)</sup> | L11 | L1  | L2  | L7  | L9<br>±0.02 <sup>1)</sup> | L11 |    |     |
| 25             | 137           | 113 | 6   | 20                        | –   | 137 | 114 | 5   | 20                        | –   |    |     |
| 50             | 177           | 138 | 21  | 40                        |     | 177 | 139 | 20  | 40                        |     |    |     |
| 80             | 227           | 168 | 41  |                           |     | 227 | 169 | 40  |                           |     | 80 |     |
| 100            | 247           | 188 |     |                           | 247 | 189 |     |     |                           |     |    |     |
| 125            | 293           | 213 | 62  |                           | 293 | 214 | 61  | 120 |                           |     |    |     |
| 160            | 328           | 248 |     |                           | 120 | 328 |     |     |                           | 249 |    | 160 |
| 200            | 368           | 288 |     |                           | 160 | 368 |     |     |                           | 289 |    |     |
| 250            | 495           | 338 | 139 | 200                       | 495 | 339 | 138 |     | 240                       |     |    |     |
| 320            | 565           | 408 |     | 240                       | 565 | 409 |     |     |                           |     |    |     |
| 400            | 645           | 488 |     | 320                       | 645 | 489 |     |     |                           | 320 |    |     |
|                |               |     |     |                           |     |     |     |     |                           |     |    |     |

1) Tolerance between the centring holes

Note: This product conforms to ISO 1179-1 and ISO 228-1.


**Note**

As the guide rods project beyond the housing when the unit is in its retracted end position (→ dimension L7), a recess must be provided in the mounting surface if the unit is to be mounted on the end face so that the guide rods can move freely.


When using a variable stroke, dimensions L1, L2, L7, L9 and L11 correspond to the next longest standard stroke.

Datasheet


Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

YSRW – self-adjusting cushioning  
Ø 50 ... 63 mm

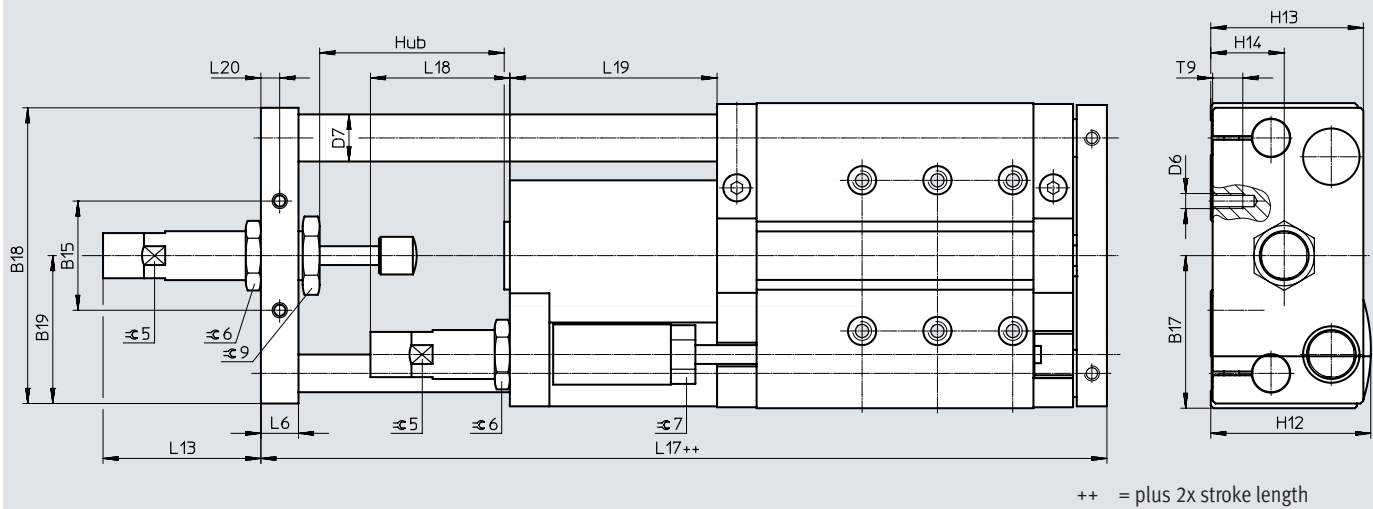

AJ/EJ – Precision stroke adjustment in the advanced and retracted end position  
Ø 50 ... 63 mm

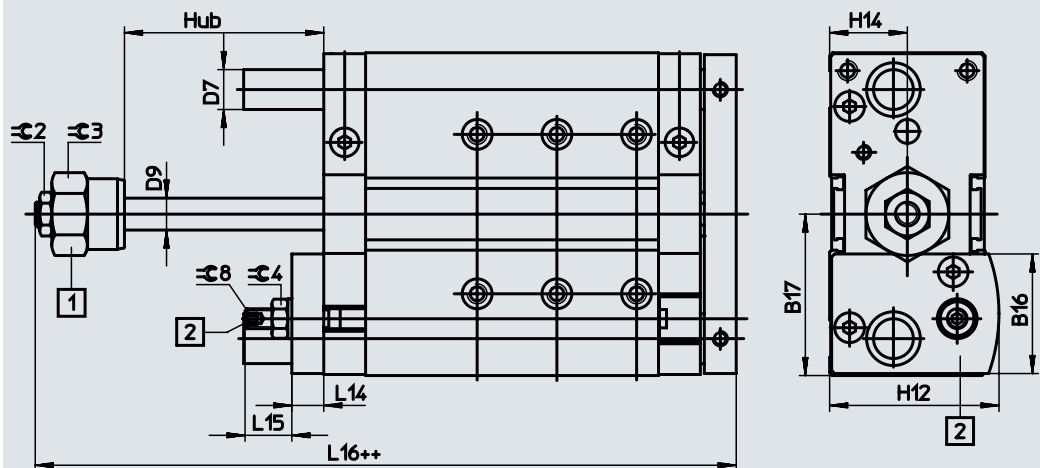

- [1] Variant AJ
- [2] Variant EJ
- ++ = plus 2x stroke length

## Datasheet

| ø<br>[mm] | B15 | B16  | B17 | B18 | B19  | D6 | D7<br>ø |    | D9<br>ø | H12 | H13 | H14 | L6 | L13  | L14 |
|-----------|-----|------|-----|-----|------|----|---------|----|---------|-----|-----|-----|----|------|-----|
|           |     |      |     |     |      |    | GF      | KF |         |     |     |     |    |      |     |
| 50        | 42  | 57.6 | 74  | 144 | 72   | M8 | 25      | 20 | 16      | 74  | 71  | 32  | 16 | 67.6 | 16  |
| 63        | 58  | 60   | 81  | 157 | 78.5 | M8 | 25      | 20 | 16      | 81  | 81  | 39  | 20 | 83.3 | 16  |

| ø<br>[mm] | L15  | L16   | L17   | L18  | L19 | L20 | T9 | ≡G2 | ≡G3 | ≡G4 | ≡G5 | ≡G6 | ≡G7 | ≡G8 | ≡G9 |
|-----------|------|-------|-------|------|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| 50        | 24.5 | 152.1 | 226.4 | 58.5 | 93  | 8   | 16 | 19  | 36  | 17  | 20  | 27  | 22  | 5   | 30  |
| 63        | 23.5 | 151.8 | 249.2 | 74   | 110 | 10  | 16 | 19  | 36  | 17  | 24  | 32  | 27  | 5   | 36  |

## Ordering data – Modular product system

| Ordering table       |                                              |                                              |            |        |        |            |        |        |            |      |  |            |
|----------------------|----------------------------------------------|----------------------------------------------|------------|--------|--------|------------|--------|--------|------------|------|--|------------|
| Size                 | 12                                           | 16                                           | 20         | 25     | 32     | 40         | 50     | 63     | Conditions | Code |  | Enter code |
| Module no.           | 529119                                       | 529120                                       | 532316     | 532317 | 532318 | 532319     | 534769 | 534770 |            |      |  |            |
| Function             | Guided drive                                 |                                              |            |        |        |            |        |        |            | DFM  |  | DFM        |
| Piston Ø [mm]        | 12                                           | 16                                           | 20         | 25     | 32     | 40         | 50     | 63     |            | -... |  |            |
| Stroke [mm]          | 10                                           | 10                                           | –          | –      | –      | –          | –      | –      |            | -... |  |            |
|                      | 20                                           | 20                                           | 20         | 20     | 20     | –          | –      | –      |            | -... |  |            |
|                      | 25                                           | 25                                           | 25         | 25     | 25     | 25         | 25     | 25     |            | -... |  |            |
|                      | 30                                           | 30                                           | 30         | 30     | 30     | –          | –      | –      |            | -... |  |            |
|                      | 40                                           | 40                                           | 40         | 40     | 40     | –          | –      | –      |            | -... |  |            |
|                      | 50                                           | 50                                           | 50         | 50     | 50     | 50         | 50     | 50     |            | -... |  |            |
|                      | 80                                           | 80                                           | 80         | 80     | 80     | 80         | 80     | 80     |            | -... |  |            |
|                      | 100                                          | 100                                          | 100        | 100    | 100    | 100        | 100    | 100    |            | -... |  |            |
|                      | 125                                          | 125                                          | 125        | 125    | 125    | 125        | 125    | 125    |            | -... |  |            |
|                      | 160                                          | 160                                          | 160        | 160    | 160    | 160        | 160    | 160    |            | -... |  |            |
|                      | 200                                          | 200                                          | 200        | 200    | 200    | 200        | 200    | 200    |            | -... |  |            |
|                      | –                                            | –                                            | 250        | 250    | 250    | 250        | 250    | 250    |            | -... |  |            |
|                      | –                                            | –                                            | 320        | 320    | 320    | 320        | 320    | 320    |            | -... |  |            |
|                      | –                                            | –                                            | 400        | 400    | 400    | 400        | 400    | 400    |            | -... |  |            |
| Variable stroke [mm] | 10 ... 200                                   |                                              | 20 ... 400 |        |        | 25 ... 400 |        |        | [1]        | -... |  |            |
| Generation           | B-series                                     |                                              |            |        |        |            |        |        |            | -B   |  | -B         |
| Cushioning           | Elastic cushioning rings/plates at both ends |                                              |            |        |        |            |        |        |            | -P   |  |            |
|                      | –                                            | Pneumatic cushioning adjustable at both ends |            |        |        |            |        |        | [2]        | -PPV |  |            |
| Position sensing     | Via proximity switch                         |                                              |            |        |        |            |        |        |            | -A   |  | -A         |
| Guide                | Plain-bearing guide                          |                                              |            |        |        |            |        |        |            | -GF  |  | -GF        |

- [1] ... Not with precision adjustment AJ  
 [2] **PPV** Not with precision adjustment AJ, EJ.

## Ordering data – Modular product system

| Ordering table                 |                               | 12                                                  | 16 | 20                                                   | 25 | 32 | 40 | 50 | 63 | Conditions | Code |  | Enter code |
|--------------------------------|-------------------------------|-----------------------------------------------------|----|------------------------------------------------------|----|----|----|----|----|------------|------|--|------------|
| Temperature resistance         |                               | Heat-resistant seals up to max. 120 °C              |    |                                                      |    |    |    |    |    | [3]        | S6   |  |            |
| Precision adjustment advanced  |                               | Precision adjustment in the end positions, advanced |    |                                                      |    |    |    |    |    |            | -AJ  |  |            |
| Precision adjustment retracted |                               | –                                                   | –  | Precision adjustment in the end positions, retracted |    |    |    |    |    |            | -EJ  |  |            |
| Accessories                    |                               | supplied loose                                      |    |                                                      |    |    |    |    |    |            | ZUB- |  | ZUB-       |
| Slot cover, sensor slot        |                               | 1 ... 10                                            |    |                                                      |    |    |    |    |    |            | ...S |  |            |
| Proximity switch               | With cable 2.5 m              | 1 ... 10                                            |    |                                                      |    |    |    |    |    |            | ...G |  |            |
|                                | contactless with cable, 2.5 m | 1 ... 10                                            |    |                                                      |    |    |    |    |    |            | ...I |  |            |

[3] S6 Not with precision adjustment AJ, EJ

## Ordering data – Modular product system

| Ordering table       |                                              |                                              |                                             |        |        |            |        |        |            |       |  |            |
|----------------------|----------------------------------------------|----------------------------------------------|---------------------------------------------|--------|--------|------------|--------|--------|------------|-------|--|------------|
| Size                 | 12                                           | 16                                           | 20                                          | 25     | 32     | 40         | 50     | 63     | Conditions | Code  |  | Enter code |
| Module no.           | 529119                                       | 529120                                       | 532316                                      | 532317 | 532318 | 532319     | 534769 | 534770 |            |       |  |            |
| Function             | Guided drive                                 |                                              |                                             |        |        |            |        |        |            | DFM   |  | DFM        |
| Piston Ø [mm]        | 12                                           | 16                                           | 20                                          | 25     | 32     | 40         | 50     | 63     |            | *...  |  |            |
| Stroke [mm]          | 10                                           | 10                                           | —                                           | —      | —      | —          | —      | —      |            | *...  |  |            |
|                      | 20                                           | 20                                           | 20                                          | 20     | 20     | —          | —      | —      |            | *...  |  |            |
|                      | 25                                           | 25                                           | 25                                          | 25     | 25     | 25         | 25     | 25     |            | *...  |  |            |
|                      | 30                                           | 30                                           | 30                                          | 30     | 30     | —          | —      | —      |            | *...  |  |            |
|                      | 40                                           | 40                                           | 40                                          | 40     | 40     | —          | —      | —      |            | *...  |  |            |
|                      | 50                                           | 50                                           | 50                                          | 50     | 50     | 50         | 50     | 50     |            | *...  |  |            |
|                      | 80                                           | 80                                           | 80                                          | 80     | 80     | 80         | 80     | 80     |            | *...  |  |            |
|                      | 100                                          | 100                                          | 100                                         | 100    | 100    | 100        | 100    | 100    |            | *...  |  |            |
|                      | 125                                          | 125                                          | 125                                         | 125    | 125    | 125        | 125    | 125    |            | *...  |  |            |
|                      | 160                                          | 160                                          | 160                                         | 160    | 160    | 160        | 160    | 160    |            | *...  |  |            |
|                      | 200                                          | 200                                          | 200                                         | 200    | 200    | 200        | 200    | 200    |            | *...  |  |            |
|                      | —                                            | —                                            | 250                                         | 250    | 250    | 250        | 250    | 250    |            | *...  |  |            |
|                      | —                                            | —                                            | 320                                         | 320    | 320    | 320        | 320    | 320    |            | *...  |  |            |
|                      | —                                            | —                                            | 400                                         | 400    | 400    | 400        | 400    | 400    |            | *...  |  |            |
| Variable stroke [mm] | 10 ... 200                                   |                                              | 20 ... 400                                  |        |        | 25 ... 400 |        |        | [1]        | *...  |  |            |
| Generation           | B-series                                     |                                              |                                             |        |        |            |        |        |            | -B    |  | -B         |
| Cushioning           | Elastic cushioning rings/plates at both ends |                                              |                                             |        |        |            |        |        |            | -P    |  |            |
|                      | —                                            | Pneumatic cushioning adjustable at both ends |                                             |        |        |            |        |        | [2]        | -PPV  |  |            |
|                      | —                                            | —                                            | Shock absorber, self-adjusting, progressive |        |        |            |        |        | [3]        | -YSRW |  |            |
| Position sensing     | Via proximity switch                         |                                              |                                             |        |        |            |        |        |            | -A    |  | -A         |
| Guide                | Recirculating ball bearing guide             |                                              |                                             |        |        |            |        |        |            | -KF   |  | -KF        |

[1] ... Not with precision adjustment AJ

[2] **PPV** Not with precision adjustment AJ, EJ.

[3] **YSRW** Not with precision adjustment AJ, EJ, as already integrated.

## Ordering data – Modular product system

| Ordering table                 |                               |                                                     |    |                                                      |    |    |    |    |    |            |      |  |            |
|--------------------------------|-------------------------------|-----------------------------------------------------|----|------------------------------------------------------|----|----|----|----|----|------------|------|--|------------|
| Size                           |                               | 12                                                  | 16 | 20                                                   | 25 | 32 | 40 | 50 | 63 | Conditions | Code |  | Enter code |
| Precision adjustment advanced  |                               | Precision adjustment in the end positions, advanced |    |                                                      |    |    |    |    |    |            | -AJ  |  |            |
| Precision adjustment retracted |                               | –                                                   | –  | Precision adjustment in the end positions, retracted |    |    |    |    |    |            | -EJ  |  |            |
| Accessories                    |                               | supplied loose                                      |    |                                                      |    |    |    |    |    |            | ZUB- |  | ZUB-       |
| Slot cover, sensor slot        |                               | 1 ... 10                                            |    |                                                      |    |    |    |    |    |            | ...S |  |            |
| Proximity switch               | With cable 2.5 m              | 1 ... 10                                            |    |                                                      |    |    |    |    |    |            | ...G |  |            |
|                                | contactless with cable, 2.5 m | 1 ... 10                                            |    |                                                      |    |    |    |    |    |            | ...I |  |            |

## Ordering data


| Ordering data – Plain-bearing guide GF |         |                       |      |         |                       |
|----------------------------------------|---------|-----------------------|------|---------|-----------------------|
|                                        |         | Part no.              | Type |         |                       |
| Stroke [mm]                            | Ø 16 mm |                       |      | Ø 20 mm |                       |
| 10                                     | 8165512 | DFM-16-10-B-PPV-A-GF  |      | –       |                       |
| 20                                     | 8162429 | DFM-16-20-B-PPV-A-GF  |      | 8161411 | DFM-20-20-B-PPV-A-GF  |
| 25                                     | 8162430 | DFM-16-25-B-PPV-A-GF  |      | 8161412 | DFM-20-25-B-PPV-A-GF  |
| 30                                     | 8162431 | DFM-16-30-B-PPV-A-GF  |      | 8161413 | DFM-20-30-B-PPV-A-GF  |
| 40                                     | 8162432 | DFM-16-40-B-PPV-A-GF  |      | 8161414 | DFM-20-40-B-PPV-A-GF  |
| 50                                     | 8162433 | DFM-16-50-B-PPV-A-GF  |      | 8161415 | DFM-20-50-B-PPV-A-GF  |
| 80                                     | 8162434 | DFM-16-80-B-PPV-A-GF  |      | 8161416 | DFM-20-80-B-PPV-A-GF  |
| 100                                    | 604968  | DFM-16-100-B-PPV-A-GF |      | 8161417 | DFM-20-100-B-PPV-A-GF |
| 125                                    | 8162435 | DFM-16-125-B-PPV-A-GF |      | 8161418 | DFM-20-125-B-PPV-A-GF |
| 160                                    | –       |                       |      | 609167  | DFM-20-160-B-PPV-A-GF |
| 200                                    |         |                       |      | 8161419 | DFM-20-200-B-PPV-A-GF |
| Stroke [mm]                            | Ø 32 mm |                       |      | Ø 40 mm |                       |
| 20                                     | 8161431 | DFM-32-20-B-PPV-A-GF  |      | –       |                       |
| 25                                     | 562063  | DFM-32-25-B-PPV-A-GF  |      | 8161440 | DFM-40-25-B-PPV-A-GF  |
| 30                                     | 8161434 | DFM-32-30-B-PPV-A-GF  |      | –       |                       |
| 40                                     | 8161436 | DFM-32-40-B-PPV-A-GF  |      | 595646  | DFM-40-50-B-PPV-A-GF  |
| 50                                     | 595430  | DFM-32-50-B-PPV-A-GF  |      | 8161443 | DFM-40-80-B-PPV-A-GF  |
| 80                                     | 578877  | DFM-32-80-B-PPV-A-GF  |      | 8161445 | DFM-40-100-B-PPV-A-GF |
| 100                                    | 578878  | DFM-32-100-B-PPV-A-GF |      | 8161446 | DFM-40-125-B-PPV-A-GF |
| 125                                    | 578879  | DFM-32-125-B-PPV-A-GF |      | –       |                       |
| 160                                    | 578880  | DFM-32-160-B-PPV-A-GF |      |         |                       |
| 200                                    | 604969  | DFM-32-200-B-PPV-A-GF |      |         |                       |
| 250                                    | 578881  | DFM-32-250-B-PPV-A-GF |      |         |                       |
| Stroke [mm]                            | Ø 50 mm |                       |      |         |                       |
| 20                                     | –       |                       |      | –       |                       |
| 25                                     | 8165515 | DFM-50-25-B-PPV-A-GF  |      | –       |                       |
| 30                                     | –       |                       |      | 588730  | DFM-50-50-B-PPV-A-GF  |
| 40                                     | –       |                       |      | 609206  | DFM-50-80-B-PPV-A-GF  |
| 50                                     | –       |                       |      | 593601  | DFM-50-100-B-PPV-A-GF |
| 80                                     | –       |                       |      | –       |                       |
| 100                                    | –       |                       |      |         |                       |
| 125                                    | –       |                       |      |         |                       |
| 160                                    | –       |                       |      |         |                       |
| 200                                    | –       |                       |      |         |                       |
| 250                                    | –       |                       |      |         |                       |


| Ordering data – Recirculating ball bearing guide KF |         |                       |      |         |                       |
|-----------------------------------------------------|---------|-----------------------|------|---------|-----------------------|
|                                                     |         | Part no.              | Type |         |                       |
| Stroke [mm]                                         | Ø 16 mm |                       |      | Ø 20 mm |                       |
| 10                                                  | 609346  | DFM-16-10-B-PPV-A-KF  |      | –       |                       |
| 20                                                  | 609345  | DFM-16-20-B-PPV-A-KF  |      | 609349  | DFM-20-20-B-PPV-A-KF  |
| 25                                                  | 559460  | DFM-16-25-B-PPV-A-KF  |      | 559477  | DFM-20-25-B-PPV-A-KF  |
| 30                                                  | 609347  | DFM-16-30-B-PPV-A-KF  |      | 609348  | DFM-20-30-B-PPV-A-KF  |
| 40                                                  | 559461  | DFM-16-40-B-PPV-A-KF  |      | 559478  | DFM-20-40-B-PPV-A-KF  |
| 50                                                  | 559462  | DFM-16-50-B-PPV-A-KF  |      | 559479  | DFM-20-50-B-PPV-A-KF  |
| 80                                                  | 559463  | DFM-16-80-B-PPV-A-KF  |      | 559480  | DFM-20-80-B-PPV-A-KF  |
| 100                                                 | 559464  | DFM-16-100-B-PPV-A-KF |      | 559481  | DFM-20-100-B-PPV-A-KF |
| 125                                                 | 559465  | DFM-16-125-B-PPV-A-KF |      | 559482  | DFM-20-125-B-PPV-A-KF |
| 160                                                 | –       |                       |      | 559483  | DFM-20-160-B-PPV-A-KF |
| 200                                                 |         |                       |      | 559484  | DFM-20-200-B-PPV-A-KF |
| Stroke [mm]                                         | Ø 32 mm |                       |      | Ø 40 mm |                       |
| 20                                                  | 8161432 | DFM-32-20-B-PPV-A-KF  |      | –       |                       |
| 25                                                  | 8161433 | DFM-32-25-B-PPV-A-KF  |      | 8161441 | DFM-40-25-B-PPV-A-KF  |
| 30                                                  | 8161435 | DFM-32-30-B-PPV-A-KF  |      | –       |                       |
| 40                                                  | 8161437 | DFM-32-40-B-PPV-A-KF  |      | 8161442 | DFM-40-50-B-PPV-A-KF  |
| 50                                                  | 609359  | DFM-32-50-B-PPV-A-KF  |      | 8161444 | DFM-40-80-B-PPV-A-KF  |
| 80                                                  | 609355  | DFM-32-80-B-PPV-A-KF  |      | 8165514 | DFM-40-100-B-PPV-A-KF |
| 100                                                 | 609357  | DFM-32-100-B-PPV-A-KF |      | 8161447 | DFM-40-125-B-PPV-A-KF |
| 125                                                 | 609358  | DFM-32-125-B-PPV-A-KF |      | –       |                       |
| 160                                                 | 609356  | DFM-32-160-B-PPV-A-KF |      |         |                       |
| 200                                                 | 8161438 | DFM-32-200-B-PPV-A-KF |      |         |                       |
| 250                                                 | 8161439 | DFM-32-250-B-PPV-A-KF |      |         |                       |
| Stroke [mm]                                         | Ø 50 mm |                       |      |         |                       |
| 20                                                  | –       |                       |      | –       |                       |
| 25                                                  | 8161448 | DFM-50-25-B-PPV-A-KF  |      | –       |                       |
| 30                                                  | –       |                       |      | 609361  | DFM-50-50-B-PPV-A-KF  |
| 40                                                  | –       |                       |      | 8161449 | DFM-50-80-B-PPV-A-KF  |
| 50                                                  | –       |                       |      | 8161450 | DFM-50-100-B-PPV-A-KF |
| 80                                                  | –       |                       |      | –       |                       |
| 100                                                 | –       |                       |      |         |                       |
| 125                                                 | –       |                       |      |         |                       |
| 160                                                 | –       |                       |      |         |                       |
| 200                                                 | –       |                       |      |         |                       |
| 250                                                 | –       |                       |      |         |                       |

## Accessories

| Ordering data                                                                            |                                                  |            |          |          |                  |
|------------------------------------------------------------------------------------------|--------------------------------------------------|------------|----------|----------|------------------|
|                                                                                          | Description                                      | Weight [g] | Part no. | Type     | PU <sup>1)</sup> |
| <b>Centring sleeve ZBH</b> <span style="float: right;">Datasheets → Internet: zbh</span> |                                                  |            |          |          |                  |
|         | To be attached to the housing and the yoke plate | 1          | 8146543  | ZBH-5-B  | 10               |
|                                                                                          |                                                  | 1          | 8146544  | ZBH-7-B  |                  |
|                                                                                          |                                                  | 1          | 8137184  | ZBH-9-B  |                  |
|                                                                                          |                                                  | 1          | 8137185  | ZBH-12-B |                  |
|                                                                                          |                                                  | 1          | 191409   | ZBH-15   |                  |

1) Packaging unit

| Centring sleeves included in the scope of delivery                                |               |                     |                |
|-----------------------------------------------------------------------------------|---------------|---------------------|----------------|
| DFM                                                                               | Piston Ø [mm] | Centring sleeves    |                |
|                                                                                   |               | For housing         | For yoke plate |
|  | 12            | 2x ZBH-5, 2x ZBH-9  | 2x ZBH-5       |
|                                                                                   | 16            | 2x ZBH-5, 2x ZBH-9  | 2x ZBH-5       |
|                                                                                   | 20            | 2x ZBH-7, 2x ZBH-9  | 2x ZBH-9       |
|                                                                                   | 25            | 2x ZBH-7, 2x ZBH-9  | 2x ZBH-9       |
|                                                                                   | 32            | 2x ZBH-9, 2x ZBH-12 | 2x ZBH-9       |
|                                                                                   | 40            | 2x ZBH-9, 2x ZBH-12 | 2x ZBH-9       |
|                                                                                   | 50            | 2x ZBH-12           | 2x ZBH-12      |
|                                                                                   | 63            | 2x ZBH-12           | 2x ZBH-12      |
|                                                                                   | 80            | 2x ZBH-12           | 2x ZBH-12      |
|                                                                                   | 100           | 2x ZBH-15           | 2x ZBH-15      |

| Centring sleeves included in the scope of delivery                                |               |                     |                |
|-----------------------------------------------------------------------------------|---------------|---------------------|----------------|
| DFM-B                                                                             | Piston Ø [mm] | Centring sleeves    |                |
|                                                                                   |               | For housing         | For yoke plate |
|  | 12            | 2x ZBH-5, 2x ZBH-9  | 2x ZBH-5       |
|                                                                                   | 16            | 2x ZBH-5, 2x ZBH-9  | 2x ZBH-5       |
|                                                                                   | 20            | 2x ZBH-7, 2x ZBH-9  | 2x ZBH-9       |
|                                                                                   | 25            | 2x ZBH-7, 2x ZBH-9  | 2x ZBH-9       |
|                                                                                   | 32            | 2x ZBH-9, 2x ZBH-12 | 2x ZBH-9       |
|                                                                                   | 40            | 2x ZBH-9, 2x ZBH-12 | 2x ZBH-9       |
|                                                                                   | 50            | 2x ZBH-12           | 2x ZBH-12      |
|                                                                                   | 63            | 2x ZBH-12           | 2x ZBH-12      |
|                                                                                   | –             | –                   | –              |
|                                                                                   | –             | –                   | –              |

## Proximity switch for piston diameter 6, 10 with DFM

## Ordering data – Proximity switch for C-slot, magneto-resistive

Datasheets → Internet: smt


|                                                                                     | Type of mounting                  | Switching output | Electrical connection, outlet direction of connection | Cable length [m] | Part no. | Type                      |
|-------------------------------------------------------------------------------------|-----------------------------------|------------------|-------------------------------------------------------|------------------|----------|---------------------------|
| <b>N/O</b>                                                                          |                                   |                  |                                                       |                  |          |                           |
|  | Inserted into the slot lengthwise | PNP              | Cable, 3-core, crosswise                              | 2.5              | 547862   | SMT-10G-PS-24V-E-2.5Q-0E  |
|                                                                                     |                                   |                  | Plug M8x1, 3-pin, crossways                           | 0.3              | 547863   | SMT-10G-PS-24V-E-0,3Q-M8D |
|                                                                                     |                                   | NPN              | Cable, 3-core, crosswise                              | 2.5              | 8065030  | SMT-10G-NS-24V-E-2.5Q-0E  |
|                                                                                     |                                   |                  | Plug M8x1, 3-pin, crossways                           | 0.3              | 8065029  | SMT-10G-NS-24V-E-0.3Q-M8D |

## Accessories

## Proximity switch for piston diameter 12 with DFM-B



## Ordering data – Proximity switch for C-slot, magneto-resistive

Datasheets → Internet: smt

|                                                                                  | Type of mounting                | Switching output | Electrical connection, outlet direction of connection | Cable length [m] | Part no. | Type                       |
|----------------------------------------------------------------------------------|---------------------------------|------------------|-------------------------------------------------------|------------------|----------|----------------------------|
| N/O                                                                              |                                 |                  |                                                       |                  |          |                            |
|  | Inserted in the slot from above | PNP              | Cable, 3-core, lengthwise                             | 2.5              | 551373   | SMT-10M-PS-24V-E-2.5-L-OE  |
|                                                                                  |                                 |                  | Plug M8x1, 3-pin, lengthways                          | 0.3              | 551375   | SMT-10M-PS-24V-E-0.3-L-M8D |
|                                                                                  |                                 |                  | Plug M8x1, 3-pin, crossways                           | 0.3              | 551376   | SMT-10M-PS-24V-E-0.3-Q-M8D |

## Ordering data – Proximity switch for C-slot, magnetic reed



Datasheets → Internet: sme

|                                                                                  | Type of mounting                  | Switching output | Electrical connection, outlet direction of connection | Cable length [m] | Part no. | Type                       |
|----------------------------------------------------------------------------------|-----------------------------------|------------------|-------------------------------------------------------|------------------|----------|----------------------------|
| N/O                                                                              |                                   |                  |                                                       |                  |          |                            |
|  | Inserted in the slot from above   | Contacting       | Plug M8x1, 3-pin, lengthways                          | 0.3              | 551367   | SME-10M-DS-24V-E-0.3-L-M8D |
|                                                                                  |                                   |                  | Cable, 3-core, lengthwise                             | 2.5              | 551365   | SME-10M-DS-24V-E-2.5-L-OE  |
|                                                                                  |                                   |                  | Cable, 2-core, lengthwise                             | 2.5              | 551369   | SME-10M-ZS-24V-E-2.5-L-OE  |
|  | Inserted into the slot lengthwise | Contacting       | Plug M8x1, 3-pin, lengthways                          | 0.3              | 173212   | SME-10-SL-LED-24           |
|                                                                                  |                                   |                  | Cable, 3-core, lengthwise                             | 2.5              | 173210   | SME-10-KL-LED-24           |

## Proximity switches for piston diameter 12 ... 100




## Ordering data – Proximity switch for T-slot, magneto-resistive

Datasheets → Internet: smt

|                                                                                    | Type of mounting                                                               | Switching output | Electrical connection | Cable length [m] | Part no. | Type                      |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------------------|-----------------------|------------------|----------|---------------------------|
| N/O                                                                                |                                                                                |                  |                       |                  |          |                           |
|  | Inserted in the slot from above, flush with the cylinder profile, short design | PNP              | Cable, 3-core         | 2.5              | 574335   | SMT-8M-A-PS-24V-E-2.5-OE  |
|                                                                                    |                                                                                |                  | Plug M8x1, 3-pin      | 0.3              | 574334   | SMT-8M-A-PS-24V-E-0.3-M8D |
|                                                                                    |                                                                                |                  | Plug M12x1, 3-pin     | 0.3              | 574337   | SMT-8M-A-PS-24V-E-0.3-M12 |
|                                                                                    |                                                                                | NPN              | Cable, 3-core         | 2.5              | 574338   | SMT-8M-A-NS-24V-E-2.5-OE  |
|                                                                                    |                                                                                |                  | Plug M8x1, 3-pin      | 0.3              | 574339   | SMT-8M-A-NS-24V-E-0.3-M8D |
| N/C                                                                                |                                                                                |                  |                       |                  |          |                           |
|  | Inserted in the slot from above, flush with the cylinder profile, short design | PNP              | Cable, 3-core         | 7.5              | 574340   | SMT-8M-A-PO-24V-E-7.5-OE  |


## Ordering data – Proximity switch for T-slot, magnetic reed


Datasheets → Internet: sme


|                                                                                    | Type of mounting                                                 | Switching output | Electrical connection | Cable length [m] | Part no. | Type                                  |
|------------------------------------------------------------------------------------|------------------------------------------------------------------|------------------|-----------------------|------------------|----------|---------------------------------------|
| N/O                                                                                |                                                                  |                  |                       |                  |          |                                       |
|  | Inserted in the slot from above, flush with the cylinder profile | Contacting       | Cable, 3-core         | 2.5              | 543862   | SME-8M-DS-24V-K-2,5-OE <sup>1)</sup>  |
|                                                                                    |                                                                  |                  |                       | 5.0              | 543863   | SME-8M-DS-24V-K-5,0-OE <sup>1)</sup>  |
|                                                                                    |                                                                  |                  | Cable, 2-core         | 2.5              | 543872   | SME-8M-ZS-24V-K-2,5-OE <sup>1)</sup>  |
|                                                                                    |                                                                  |                  | Plug M8x1, 3-pin      | 0.3              | 543861   | SME-8M-DS-24V-K-0,3-M8D <sup>1)</sup> |
|  | Inserted in the slot lengthwise, flush with the cylinder profile | Contacting       | Cable, 3-core         | 2.5              | 150855   | SME-8-K-LED-24 <sup>1)</sup>          |
|                                                                                    |                                                                  |                  | Plug M8x1, 3-pin      | 0.3              | 150857   | SME-8-S-LED-24 <sup>1)</sup>          |
| N/C                                                                                |                                                                  |                  |                       |                  |          |                                       |
|  | Inserted in the slot lengthwise, flush with the cylinder profile | Contacting       | Cable, 3-core         | 7.5              | 160251   | SME-8-O-K-LED-24 <sup>1)</sup>        |


1) Not compatible with cylinders DFM-...-GF-F1A

## Accessories

| Connecting cables NEBA, straight, M8 connection                                   |                                                |                                                |                                               |              |          |                       |
|-----------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------------|-----------------------------------------------|--------------|----------|-----------------------|
|                                                                                   | Electrical connection 1, connection technology | Electrical connection 2, connection technology | Electrical connection 2, number of pins/cores | Cable length | Part no. | Type                  |
|  | M8x1 A-coded to EN 61076-2-104                 | Open end                                       | 3                                             | 2.5 m        | 8078223  | NEBA-M8G3-U-2.5-N-LE3 |
|                                                                                   |                                                |                                                |                                               | 5 m          | 8078224  | NEBA-M8G3-U-5-N-LE3   |

| Connecting cables NEBA, straight, M12 connection                                  |                                                |                                                |                                               |              |          |                        |
|-----------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------------|-----------------------------------------------|--------------|----------|------------------------|
|                                                                                   | Electrical connection 1, connection technology | Electrical connection 2, connection technology | Electrical connection 2, number of pins/cores | Cable length | Part no. | Type                   |
|  | M12x1, A-coded to EN 61076-2-101               | Open end                                       | 3                                             | 2.5 m        | 8078236  | NEBA-M12G5-U-2.5-N-LE3 |
|                                                                                   |                                                |                                                |                                               | 5 m          | 8078237  | NEBA-M12G5-U-5-N-LE3   |

| Connecting cables NEBA, angled, M8 connection                                      |                                                |                                                |                                               |              |          |                       |
|------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------------|-----------------------------------------------|--------------|----------|-----------------------|
|                                                                                    | Electrical connection 1, connection technology | Electrical connection 2, connection technology | Electrical connection 2, number of pins/cores | Cable length | Part no. | Type                  |
|  | M8x1 A-coded to EN 61076-2-104                 | Open end                                       | 3                                             | 2.5 m        | 8078230  | NEBA-M8W3-U-2.5-N-LE3 |
|                                                                                    |                                                |                                                |                                               | 5 m          | 8078231  | NEBA-M8W3-U-5-N-LE3   |

| Connecting cables NEBA, angled, M12 connection                                      |                                                |                                                |                                               |              |          |                        |
|-------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------------|-----------------------------------------------|--------------|----------|------------------------|
|                                                                                     | Electrical connection 1, connection technology | Electrical connection 2, connection technology | Electrical connection 2, number of pins/cores | Cable length | Part no. | Type                   |
|  | M12x1, A-coded to EN 61076-2-101               | Open end                                       | 3                                             | 2.5 m        | 8078245  | NEBA-M12W5-U-2.5-N-LE3 |
|                                                                                     |                                                |                                                |                                               | 5 m          | 8078246  | NEBA-M12W5-U-5-N-LE3   |


## Accessories

## Ordering data – Slot cover for T-slot

|                                                                                  | Assembly   | Length   | Part no. | Type    |
|----------------------------------------------------------------------------------|------------|----------|----------|---------|
|  | Insertable | 2x 0.5 m | 151680   | ABP-5-S |

## Ordering data – One-way flow control valves

Datasheets → Internet: grla

|                                                                                  | Connection |                 | Material     | Part no. | Type             |
|----------------------------------------------------------------------------------|------------|-----------------|--------------|----------|------------------|
|                                                                                  | Thread     | For tubing O.D. |              |          |                  |
|  | M3         | –               | Metal design | 175038   | GRLA-M3          |
|                                                                                  |            | 3               |              | 175041   | GRLA-M3-QS-3     |
|                                                                                  | M5         | 3               |              | 193137   | GRLA-M5-QS-3-D   |
|                                                                                  |            | 4               |              | 193138   | GRLA-M5-QS-4-D   |
|                                                                                  |            | 6               |              | 193139   | GRLA-M5-QS-6-D   |
|                                                                                  |            | 8               |              | 193142   | GRLA-1/8-QS-3-D  |
|                                                                                  | G1/8       | 3               |              | 193143   | GRLA-1/8-QS-4-D  |
|                                                                                  |            | 4               |              | 193144   | GRLA-1/8-QS-6-D  |
|                                                                                  |            | 6               |              | 193145   | GRLA-1/8-QS-8-D  |
|                                                                                  |            | 8               |              | 193146   | GRLA-1/4-QS-6-D  |
|                                                                                  | G1/4       | 6               |              | 193147   | GRLA-1/4-QS-8-D  |
|                                                                                  |            | 8               |              | 193148   | GRLA-1/4-QS-10-D |
|                                                                                  |            | 10              |              | 193149   | GRLA-3/8-QS-6-D  |
|                                                                                  | G3/8       | 6               |              | 193150   | GRLA-3/8-QS-8-D  |
|                                                                                  |            | 8               |              | 193151   | GRLA-3/8-QS-10-D |
|                                                                                  |            | 10              |              |          |                  |